
# Service Manual

**Progressive Plasma Television** 



TH-42PA50A TH-42PA50H TH-42PA50M TH-37PA50H TH-37PA50M

**GP8DA Chassis** 

### **Specifications**

Power Source AC 220-240 V, 50 / 60 Hz Power Consumption Average use : 245 W (37-inch)

Average use: 315 W (42-inch)
Standby condition: 0.3 W (37-inch)
Standby condition: 0.3 W (42-inch)

Plasma Display panel

Drive method AC type
Aspect Ratio 16:9
Contrast Ratio 4000:1

Screen size (No.of pixels) 818 mm (W)  $\times$  461 mm (H)  $\times$  939 mm (diagonal) (37-inch)

920 mm (W) × 518 mm (H) × 1,056 mm (diagonal) (42-inch)

408,960 (852 (W) × 480 (H)) [2,556 × 480 dots]

Sound

Speaker 12 cm  $\times$  6 cm  $\times$  2 pcs, 6  $\Omega$ Audio Output 16 W (8 W + 8 W ), 10% THD

Applicable signals

Colour System NTSC, PAL, PAL60, SECAM, Modified NTSC

 $\textbf{Scanning format} \\ 480i(60Hz), \ 480p(60Hz), \ 576i(50Hz), \ 576p(50Hz), \ 720p(50Hz), \ 720p(60Hz), \ 1080i(50Hz), \ 1080i(60Hz), \ 1080$ 

1152i(50Hz) (42PA50A)

Receiving Systems / Band name (PA50H/M)

21	Systems	Function
1	PAL B, G, H	Reception
2	PAL I	of broadcast
3	PAL D, K	transmissions
4	SECAM B, G	and Playback
5	SECAM D, K	from Video
6	SECAM K1	Cassette Tape
7	NTSCM(NTSC	Recorders
′	3.58/4.5 MHz)	. 10001 4010

	21 Systems	Function
8	NTSC 4.43/5.5 MHz	
9	NTSC 4.43/6.0 MHz	Playback
10	NTSC 4.43/6.5 MHz	from
11	NTSC 3.58/5.5 MHz	Special
12	NTSC 3.58/6.0 MHz	VCR's or
	NTSC 3.58/6.5 MHz	DVD
14	SECAM I	

		21 Systems	Function
	15	PAL 60 Hz/5.5 MHz	Playback
	16	PAL 60 Hz/6.0 MHz	from Special
	17	PAL 60 Hz/6.5 MHz	Disc Players
	18	SECAM 60 Hz/5.5 MHz	and Special
	19	SECAM 60 Hz/6.0 MHz	VCR's or
	20	SECAM 60 Hz/6.5 MHz	DVD
	21	NTSC 50 Hz/4.5 MHz	

# **Panasonic**<sup>®</sup>

© 2005 Matsushita Electric Industrial Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

**Receiving Systems** 

/ Band name (PA50A)

1. PAL B/G Reception of Off air broadcasts

2. NTSC 4.43 Playback from Video Tape Recorders

3. NTSC 3.58 Playback from Special Video Tape Recorders and Special Video Disc Players

3. NTSC 3.58
4. PAL 60Hz
Playback from Special Video Tape Recorders and Special Video Disc Players
(Via the AV Sockets)only.

Receiving Channels (PA50H/M) Regular TV

**UHF BAND VHF BAND CATV** 2-12 (PAL/SECAM B, K1) 21-69 (PAL G, H, I/SECAM G, K, K1) S1-S20 (OSCAR) 0-12 (PAL B AUST.) 28-69 (PAL B AUST.) 1-125 (USA CATV) 1-9 (PAL B N.Z.) 13-57 (PAL D, K) C13-C49 (JAPAN) 1-12 (PAL/SECAM D) 13-62 (NTSC M Japan) S21-S41 (HYPER) 1-12 (NTSC M Japan) 14-69 (NTSC M USA) Z1-Z37 (CHINA) 2-13 (NTSC M USA) 5A, 9A (AUST.)

Receiving Channels (PA50A) VHF 0 to 12 PAL B

UHF 21 to 69 PAL G

S'1 to S'3 HYPER TUNER

S1 to S41 (One tuner)

Aerial - Rear UHF / VHF

**Operating Conditions** Temperature : 0  $^{\circ}$ C - 40  $^{\circ}$ C

Humidity: 20 % - 80 % RH (non-condensing)

**Connection Terminals** 

**AV1 Input** 

AUDIO L - R RCA PIN Type  $\times$  2 0.5 Vrms VIDEO RCA PIN Type  $\times$  1 1.0 Vp-p (75  $\Omega$ )

**S VIDEO** MINI DIN 4-pin Y: 1.0 Vp-p (75  $\Omega$ ) C: 0.286 Vp-p (75  $\Omega$ )

AV2 Input

AUDIO L - R RCA PIN Type  $\times$  2 0.5 Vrms VIDEO RCA PIN Type  $\times$  1 1.0 Vp-p (75  $\Omega$ )

**COMPONENT** Y 1.0 Vp-p (including synchronization)

 $P_B/C_B/,\; P_R/C_R \qquad \qquad \pm 0.35 \; \text{Vp-p}$ 

**AV3 Input** 

AUDIO L - R RCA PIN Type  $\times$  2 0.5 Vrms VIDEO RCA PIN Type  $\times$  1 1.0 Vp-p (75  $\Omega$ )

**COMPONENT** Y 1.0 Vp-p (including synchronization)

 $P_B/C_B/$ ,  $P_R/C_R$  ±0.35 Vp-p

OUTPUT

AUDIO L - R RCA PIN Type × 2 0.5 Vrms (high impedance)

**VIDEO** RCA PIN Type  $\times$  1 1.0 Vp-p (75  $\Omega$ )

**Dimensions (W × H × D)** 968 mm × 641 mm × 97 mm (37-inch)

1,068 mm × 701 mm × 97 mm (42-inch)

Weight 29.0 kg Net (37-inch)

33.0 kg Net (42-inch)

#### Notes:

• Design and Specifi cations are subject to change without notice. Weight and Dimensions shown are approximate.

#### **⚠ WARNING**

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

### **CONTENTS**

Page	Page
1 Applicable signals5	2 Safety Precautions 5

2.1. General Guidelines		
3 Prevention of Electro Static Discharge (ESD) to	13.1. P-Board	
Electrostatically Sensitive (ES) Devices	3.2. PA-Board ······	38
4 About lead free solder (PbF)	7 13.3. PB-Board	39
5 Service Hint	3.4. H-Board	40
6 Plasma panel replacement method	13.5. DG-Board	42
6.1. Remove the Back cover		44
6.2. Remove the P-Board	3.7. TB-Board	····· 45
6.3. Remove the PB-Board ······	9 13.8. Z-Board	···· 46
6.4. Remove the D-Board ······	9 13.9. D-Board	··· 47
6.5. Remove the rear terminal cover10	13.10. C1-Board (37 inch)	50
6.6. Remove the metal frame10		
6.7. Remove the DG-Board10		
6.8. Remove the H-Board and TA-Board10		
6.9. Remove the PA-Board ·1		
6.10. Remove the Z-Board ····································		
6.11. Remove the SU-Board1		
6.12. Remove the SD-Board		
6.13. Remove the SC-Board		
6.14. Remove the SS-Board12		
6.15. Remove the C1-Board13		
6.16. Remove the C2-Board13		
6.17. Remove the K-Board13		
6.18. Remove the S-Board13		
6.19. Remove the Speaker L, R1		
6.20. Remove the Plasma panel section from the Front frame	14.4. P-Board (1 of 6) Schematic Diagram	
(glass)12		
6.21. Replace the plasma panel (finished)15	, , ,	
7 Location of Lead Wiring16		
7.1. Lead of Wiring (1)16		
7.2. Lead of Wiring (2)17		
7.3. Lead of Wiring (3)1		
8 Self Check19		
	· ·	
8.1. Power LED Blinking timing chart20		
8.3. No Picture2	-	
8.4. Local screen failure	•	
9 Service Mode Function23		
9.1. How to enter SERVICE 123		
9.2. How to enter SERVICE 223		
9.3. Option Description		
9.4. Option Code Setting27		
10 Adjustment Procedure		
10.1. Driver Set-up28	, , ,	
10.2. Initialization Pulse Adjust29		
10.3. P.C.B. (Printed Circuit Board) exchange30		
10.4. Adjustment Volume Location30		
10.5. Test Point Location30		
11 Adjustment3	· , , , ,	
11.1. PAL panel white balance adjustment ····································		
11.2. 1080i white balance adjustment ····································		
11.3. Sub bright adjustment3		
11.4. ABL adjustment33		
12 Hotel mode 34	14.32. DG-Board (10 of 12) Schematic Diagram ·····	96

14.33. DG-Board (11 of 12) Schematic Diagram97
14.34. DG-Board (12 of 12) Schematic Diagram98
14.35. D-Board Block Diagram99
14.36. D-Board (1 of 6) Schematic Diagram 100
14.37. D-Board (2 of 6) Schematic Diagram 101
14.38. D-Board (3 of 6) Schematic Diagram 102
14.39. D-Board (4 of 6) Schematic Diagram 103
14.40. D-Board (5 of 6) Schematic Diagram 104
14.41. D-Board (6 of 6) Schematic Diagram 105
14.42. C1 and C2-Board Block Diagram 106
14.43. C1-Board (1 of 2) Schematic Diagram (37 inch) 107
14.44. C1-Board (2 of 2) Schematic Diagram (37 inch) 108
14.45. C1-Board (1 of 2) Schematic Diagram (42 inch) 109
14.46. C1-Board (2 of 2) Schematic Diagram (42 inch) 110
14.47. C2-Board (1 of 2) Schematic Diagram (37 inch) 111
14.48. C2-Board (2 of 2) Schematic Diagram (37 inch) 112
14.49. C2-Board (1 of 2) Schematic Diagram (42 inch) 113
14.50. C2-Board (2 of 2) Schematic Diagram (42 inch) 114
14.51. SC-Board Block Diagram 115
14.52. SC-Board (1 of 2) Schematic Diagram 116

14.53. SC-Board (2 of 2) Schematic Diagram117
14.54. SU-Board Block Diagram118
14.55. SU-Board Schematic Diagram (37 inch)119
14.56. SU-Board Schematic Diagram (42 inch)120
14.57. SD-Board Block Diagram121
14.58. SD-Board Schematic Diagram (37 inch)122
14.59. SD-Board Schematic Diagram (42 inch)123
14.60. SS-Board Block Diagram124
14.61. SS-Board Schematic Diagram125
45 Doube Location 9 Machanical Daulesconent Doube List 407
15 Parts Location & Mechanical Replacement Parts List 127
15.1. Parts Location
•
15.1. Parts Location

### 1 Applicable signals

Applicable input signal for Component(Y, PB, PR)

Signal name	Horizontal frequency (kHz)	Vertical frequency (Hz)
525(480)/60i	15.73	59.94
525(480)/60p	59.94	
625(576)/50i	15.63	50.00
625(576)/50p	31.25	50.00
750(720)/50p	37.50	50.00
750(720)/60p	45.00	60.00
1125(1080)/50i	28.13	50.00
1125(1080)/50i	31.25	50.00
1125(1080)/60i	33.75	60.00

(TH-42PA50A ONLY)

**Note:** Signals other than above may not be displayed properly.

### 2 Safety Precautions

#### 2.1. General Guidelines

- 1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
- 2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
- 3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

### 2.1.1. Leakage Current Cold Check

- 1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
- 2. Measure the resistance value, with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between  $1M\Omega$  and  $5.2M\Omega$ .

When the exposed metal does not have a return path to the chassis, the reading must be CXO.




Figure 1

# 2.1.2. Leakage Current Hot Check (See Figure 1.)

- Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
- 2. Connect a  $1.5k\Omega$ , 10 watts resistor, in parallel with a  $0.15\mu F$  capacitors, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
- 3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
- 4. Check each exposed metallic part, and measure the voltage at each point.
- 5. Reverse the AC plug in the AC outlet and repeat each of the above measurements.
- 6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

# 3 Prevention of Electro Static Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge (ESD).

- 1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
- 2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as alminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
- 3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
- 4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
- 5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
- 6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, alminum foil or comparable conductive material).
- 7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

#### Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise hamless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

#### IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are imporant for safety.

These parts are marked by  $\triangle$  in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

### 4 About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).


That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.

PCBs manufactured using lead free solder will have the PbF within a leaf Symbol (b) stamped on the back of PCB.


#### Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is  $50 \sim 70 \, ^{\circ}\text{F} \, (30 \sim 40 \, ^{\circ}\text{C})$  higher. Please use a high temperature soldering iron and set it to  $700 \pm 20 \, ^{\circ}\text{F} \, (370 \pm 10 \, ^{\circ}\text{C})$ .
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).
   If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

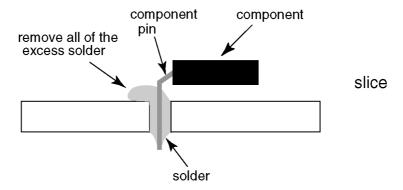


#### Suggested Pb free solder

There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

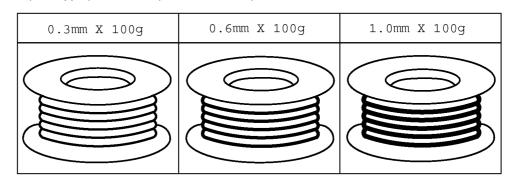

### **5 Service Hint**

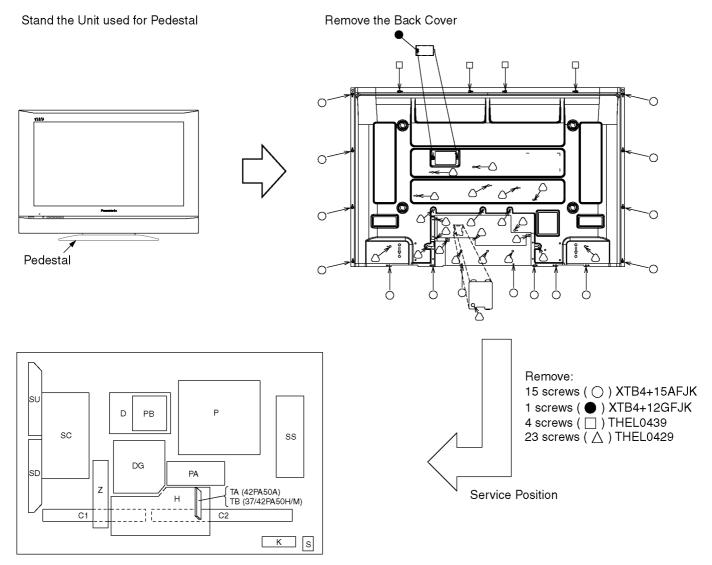

Board Name	Function	Board Name	Function
Р	Power Supply	C1	Data Driver (Left)
PA	DC-DC Converter, Power SOS	C2	Data Driver (Right)
PB	Audio Power	SC	Scan Drive
Н	AV Terminal, AV Switch, MSP	SU	Scan out (Upper)
TA (PA50A)	Tuner	SD	Scan out (Lower)
TB (PA50H/M)	Tuner	SS	Sustain Drive
DG	Digital Signal Processor	K	Remote receiver, Keyscan
Z	Speaker AMP	S	Power Switch
D	Format Converter, Plasma Al Processor		

### 6 Plasma panel replacement method

### 6.1. Remove the Back cover.


1. See Service Hint (Section 5).

#### 6.2. Remove the P-Board.

#### Caution:


To remove P.C.B., wait 1 minute after power was off for discharge from electrolisis capacitors.

- 1. Disconnect the couplers (P2, P5, P9, P10, P11, P12, P23 and P25).
- 2. Remove the screws (×5 → ) and remove the P-Board.




### 6.3. Remove the PB-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (PB5 and PB7).
- 3. Remove the screws (×3 ➡) and remove the PB-Board metal frame.
- 4. Remove the screws (× 4 → ) and remove the PB-Board.

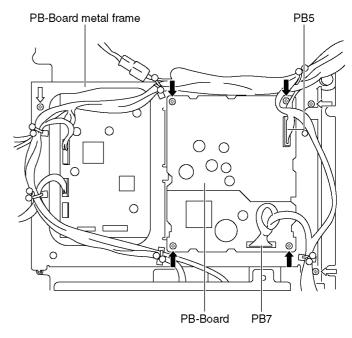


### 6.4. Remove the D-Board

- 1. Remove the PB-Board.
- 2. Disconnect the couplers (D3, D5, D20 and D25) and
- 3. Disconnect the flexible cables (D33 and D34).
- 4. Remove the screws (×4 → ) and remove the D-Board.




# 6.5. Remove the rear terminal cover

- 1. Remove the screws ( $\times 4 \implies$ ), and rhe screw ( $\times 7 \implies$ ).
- 2. Remove the rear terminal cover.




#### 6.6. Remove the metal frame

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (D3, D5, H7, P10 and PB7) and relay connector (SP-R, SP-L).
- 3. Remove the screws (×4 →) remove the metal frame.

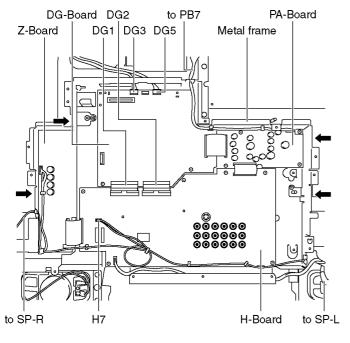


### 6.7. Remove the DG-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (DG3 and DG5).
- 3. Disconnect the flexible cables (DG1, DG2 and DG20).
- 4. Remove the screws (×2 ➡) and remove the DG-Board.




# 6.8. Remove the H-Board and TA-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Remove the screws (×2 -> ) and remove the TA-Board.
- 3. Disconnect the coupler (H53).
- 4. Disconnect the flexible ables (H1, H2, H30 and H50).
- 5. Remove the screws (×3 ⇒) and remove the H-Board.

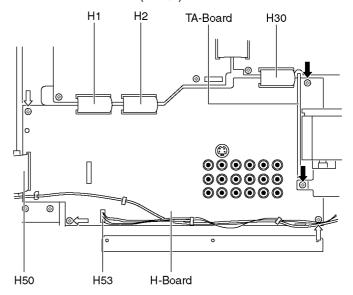


### 6.9. Remove the PA-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (PA7 and PA10).
- 3. Disconnect the flexible cables (PA20 and PA30).
- 4. Remove the screws (×4 → ) and remove the PA-Board.




### 6.10. Remove the Z-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the coupler (Z2).
- 3. Disconnect the flexible cable (Z50).
- 4. Remove the screws (×2 → ) and remove the Z-Board.




### 6.11. Remove the SU-Board

- 1. Remove the screws (×2 →)
- 2. Slide the SU-Board to the left to disconnect from a coupler (SC41 SU41) on the SC-Board and disconnect a coupler (SU45 or SC45).




3. Disconnect the flexible cables (SU1, SU2, SU3) connected to the SU-Board, and remove the SU-Board.




### 6.12. Remove the SD-Board

- 1. Remove the screws (×2 →)
- 2. Slide the SD-Board to the left to disconnect from a coupler (SC42 SD42) on the SC-Board and disconnect a coupler (SD46 or SC46).




3. Disconnect the flexible cables (SD1, SD2 and SD3) connected to the SU-Board, and remove the SD-Board.




### 6.13. Remove the SC-Board

- 1. Disconnect the couplers (SC2, SC20 and SC23).
- 2. Remove the screws (×6 → ) and remove the SC-Board.




### 6.14. Remove the SS-Board

- 1. Disconnect the couplers (SS11, SS12, SS23 and SS34).
- 2. Disconnect the flexible cables (SS41, SS42, SS43 and SS44).
- 3. Remove the screws (×6 → ) and remove the SS-Board.




### 6.15. Remove the C1-Board

- 2. Disconnect the flexible cables (CB1, CB2 and CB3).
- 3. Disconnect the flexible cable (C11).
- 4. Disconnect the coupler (C12).
- 5. Remove the screws (×3 → ) and remove the C1-Board.

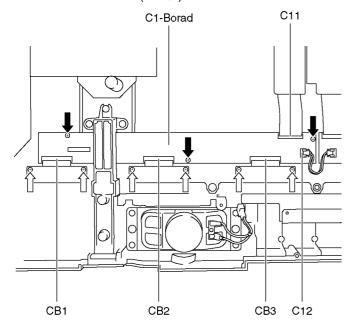


### 6.16. Remove the C2-Board

- 2. Disconnect the flexible cables (CB4, CB5, CB6 and CB7).
- 3. Disconnect the flexible cable (C21).
- 4. Disconnect the couplers (C22 and C23).
- 5. Remove the screws (×3 → ) and slide the C2-Board to the left and remove the C2-Board.

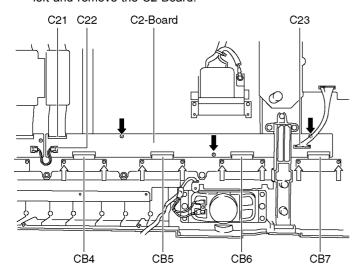


#### 6.17. Remove the K-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (H53 and SS34).
- 3. Remove the screws (×3 → ) and remove the K-Board.




### 6.18. Remove the S-Board

1. Remove the screw (×2 → ) and remove the S-Board unit.




- 2. Unlock the cable clampers to free the cable.
- 3. Disconnect the couplers (S1 and S2).
- 4. Remove the screws (×2 → ) and remove the S-Board.




### 6.19. Remove the Speaker L, R

1. Remove the screw (×8 →) and remove the Speaker L, R.




# 6.20. Remove the Plasma panel section from the Front frame (glass)

- 1. Remove the front frame and the plasma panel fastening screw (×8 →).
- 2. Remove the front frame and the stand brackets fastening screw (×6 ➡).



3. For leaving the plasma panel from the front frame, pull the bottom of the front frame forward, lift, and remove.




# 6.21. Replace the plasma panel (finished).

- Place the new plasma panel (finished) on the flat surface of the table (covered by a soft cloth), with the plasma panel surface facing downward.
- 2. Attach the C1-Board and the C2-Board, connect the flexible cables (×7) from the Plasma panel to the C1-Board and C2-Board, and fix the flexible cable holders.
- 3. Attach the Hooks (left, right) and fit the stand brackets (left, right) to the new plasma panel.
- 4. Place the plasma panel section on the servicing stand.
- 5. Attach the front frame and the each P.C.Board and so on, to the new plasma panel.
  - \* When fitting the front frame, be careful not to allow any debris, dust or handling residues to remain between the front glass and plasma panel.

### 7 Location of Lead Wiring

### 7.1. Lead of Wiring (1)

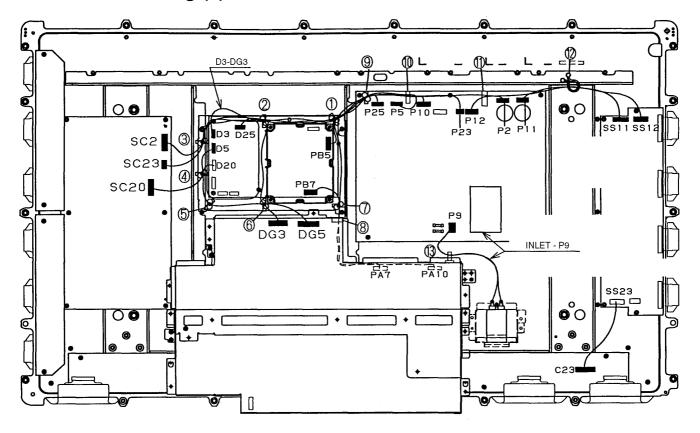


### 7.2. Lead of Wiring (2)

CON : No. ——	CON : No.	1	2	3	4	<b>(5)</b>	6	7	8	9	10	(1)	(2)	13
SC2 —	P2										$\bigcirc$	$\bigcirc$		
SC23 —	P23										$\bigcirc$			
SC20 —	D20													
DG3 —	D3						$\bigcirc$							
DG5 —	D5					$\bigcirc$	$\bigcirc$							
D25 —	P25													
PB5 —	P5										$\bigcirc$			
PA7 —	PB7								$\bigcirc$					
PA10 —	P10								$\bigcirc$		$\bigcirc$			
SS11 —	P11												$\bigcirc$	
SS12 —	P12											$\bigcirc$	$\bigcirc$	
SS23 —	C23													
AC INLET	P9													

Connector Connection: P2, P5, P9, P10, P11, P12, P23, P25

D3, D5, D25, PB7, PB5, SC2, SC20, SC23, SS11, SS12, DG3, DG5, C23


### 7.3. Lead of Wiring (3)

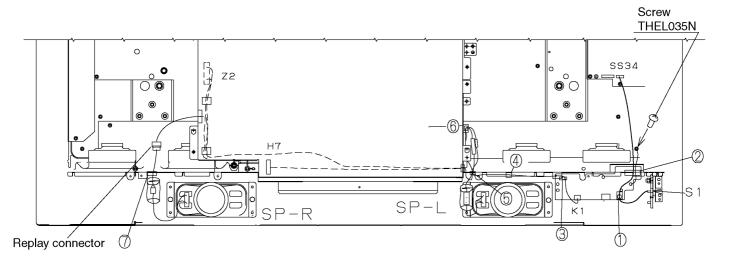

CON: NO.	CON:NO.	1	2	3	4	(5)	6	$\odot$	
S 1	SS34		0						
K1	H7			$\bigcirc$	$\bigcirc$	0	0		
SP L	. Z2					$\bigcirc$	$\bigcirc$		
SP R	Z2							$\bigcirc$	
K	earth		$\cap$						

### 8 Self Check

- 1. Self-Check is used to automatically check the bus lines and hexadecimal code of the TV set.
- 2. To get into the Self -Check mode press the Down (-/V) button on the customer controls at the front of the set, at the same time pressing the (Recall) button on the remote control, and the screen will show:

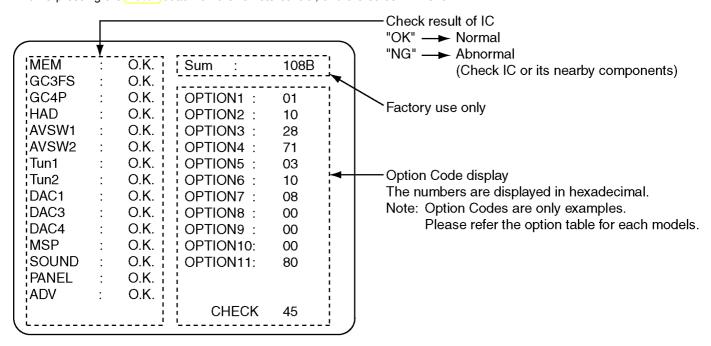

If the CCU ports have been checked and found to be incorrect or not located then "--" will appear in place of "O.K.".

Display	Ref.No	Description	P.C.B.
MEM	IC1107	EEPROM	DG-Board
GC3FS	IC4013	Global Core for Sub	DG-Board
GC4P	IC4054	Global Core for Main	DG-Board
HAD	IC4012	OSD RGB A/D	DG-Board
AVSW1	IC2105	Audio SW	H-Board
AVSW2	IC3005	Video SW	H-Board
Tun1	TU001	Tuner	TA/TB-Board
Tun2	TU002	Tuner	TB-Board
DAC1	IC1106	Ext. DAC	DG-Board
DAC3	IC3006	Ext. I/O	H-Board
DAC4	IC4016	Ext. I/O	DG-Board
MSP	IC2106	Multi Sound Processor	H-Board
SOUND	IC2300	Sound Control	Z-Board
PANEL	IC9003	Panel	D-Board
ADV	IC4005	10bit A/D	DG-Board

### 8.1. Power LED Blinking timing chart

1. Subject

Information of LED Flashing timing chart.

2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinkes of the Power LED on the front panel of the unit.


Blinking Times	Blinking timing	Contents & Check point
1	Once 3 sec  →	No particular check point
10		Tuner SOS (No power for tuner)
12		Sound SOS

### 8.2. No Power


First check point

There are following 3 states of No Power indication by power LED.


- 1. No lit
- 2. Green is lit then turns red blinking a few seconds later.
- 3. Only red is lit.
- 1. No lit

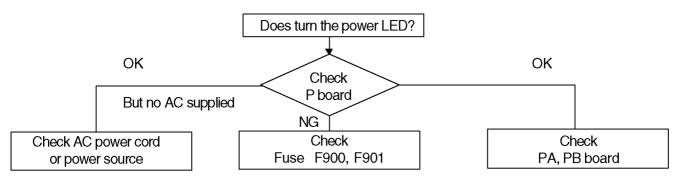

### 8.3. No Picture

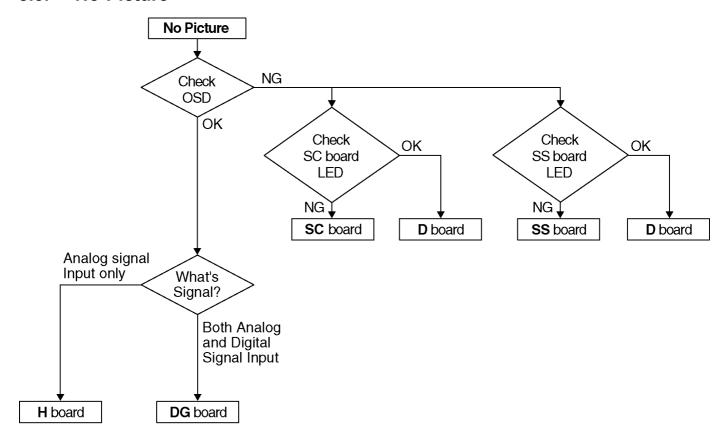


Drive circuits LED indicator

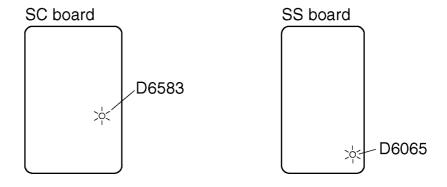

### 8.4. Local screen failure

Plasma display may have local area failure on the screen. Fig - 1 is the possible defect P.C.B. for each local area.

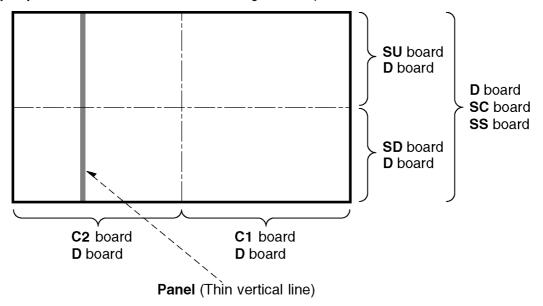

<Local screen failure chart>

Fig - 1

### 9 Service Mode Function

MPU controls the functions switching for each IICs through IIC bus in this chassis. The following setting and adjustment can be adjusted by remote control in Service Mode.

### 9.1. How to enter SERVICE 1


- 1. In sound menu, set BASS to MAXIMUM, and set TREBLE to MINIMUM.
- 2. Simultaneously press **INDEX** button on remote control and **DOWN** button [ -/V ] on the TV set.

### 9.2. How to enter SERVICE 2

- 1. Set the channel to CH99.
- 2. Select the SPL Gain.
- 3. Press HOLD button on remote control.

#### Note:

To exit to Service mode, press N or Power button on remote control.

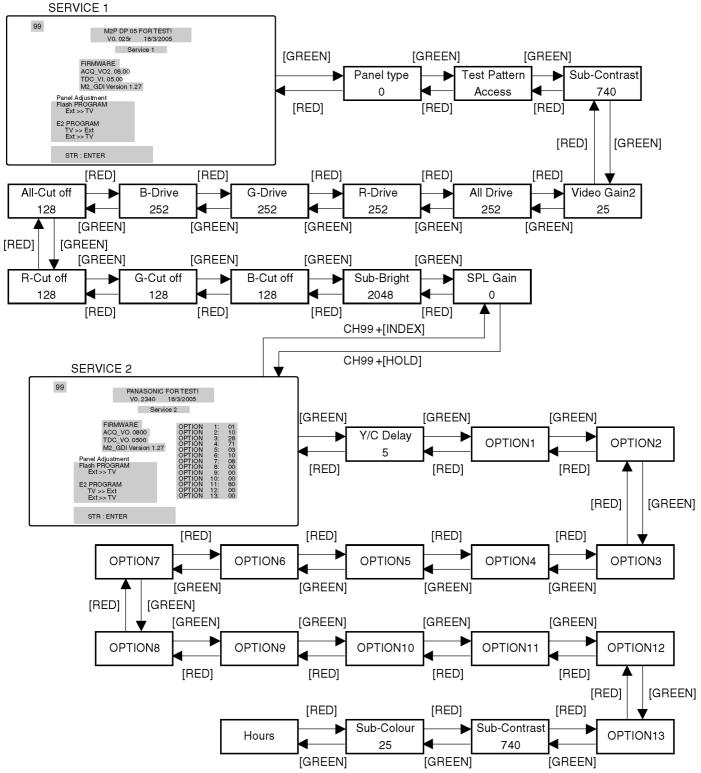

#### Key Command

- Press the RED/GREEN button to step up/down through the functions.
- · Press the **YELLOW/BLUE** button to change the function values.
- Press the **OK** button after each adjustment has been mode to store the required values.

### 9.3. Option Description

	PA50M		
ontion1	+		
option1	0F		
bC		Colour system	Auto(1)
b1	1		SECAM(1)
b2			NTSC(1)
b3		10 1 10 51411	M.NTSC(1)
b4		A2 select 6.5MHz	5.742MHz(0) 6.742MHz(1)
b5	_	SIF	4.5 / 5.5 / 6.0 / 6.5(0), 5.5 / 6.0 / 6.5(1)
b6			5.5 / 6.5(2), 6.0 / 6.5(3)
b7	+	free	
option2	E2		
bC		A2 enable	4.5(1)
b1			5.5(1)
b2			6.0(1)
b3			6.5(1)
b4		NICAM enable	4.5(1)
b5			5.5(1)
b6			6.0(1)
b7	1		6.5(1)
option3	1B		
bC	1	SASO enable	SASO enable(1)
b1	1	Fine tuning	Enable(1)
b2		Search speed	Slow(1) Fast(0)
b3	1	Tuner	MACO tuner (1), Others (0)
b4	1	HYPER	UHF only (0), UHF/VHF (1)
b5	0	IF I2C	I2C controlled Tuner IF module (1)
b6	0	NICAM C4 bit	enable(1)
b7	0	Blue Back	BLUE BACK on/off selection in menu(0)
option4	48		
bo	0	Aspect AUTO	enable(1)
b1	0	S1/S2 enable	enable(1)
b2	0	ID-1	enable(1)
b3	1	User aspect Just	enable(1)
b4	0	User aspect 14:9	enable(1)
b5	0	ALBD 14:9	14:9 enable, Zoom3 disable at self wide(1) / Zoom1, Zoom3 enable at self wide (0)
b6	1	TEXT	enable(1)
b7	0	TEXT TOP	TOP enable (1)
option5	1B		
bo	1	CH Blanking	Blanking enable (1)
b1		AV Blanking	Blanking enable (1)
b2		Noise mute	Noise mute enable(0)
b3		sub picture	without sub-picture(0), with sub-picture(1)
b4		2tuner	2tuner(1),1tuner(0)
b5		AV Input	3rotation(1) / 2rotation without front RCA (0)
b6	0	Panel (LCD)	Samsung Panel(1) / SHARP Panel(0)
b7	0	Large size (LCD)	32(1) / 26(0) for LCD
option6	00		
bC		SD module	with SD module (1)
b1	_	SD module Ext.Rec(PAL)	enable(1)
b2		SD module Ext.Rec(NTSC)	enable(1)
b3		SD module Ext.Rec(SECAM)	enable(1)
b4		IDTV	enable(1)
b5		HDMI	enable(1)
b6		Ext. HV input	without HV input(0) / with HV input(1)
b7		PC	enable(1)
option7	B1		• • •
		Asia	Asia(1),europe(0)
b1		Australia	Australia(1)
b2		Ireland/India	India(1)
b3		UK/Korea	Korea(1)
b4		Lang1	Large(0) / Small(1)
b5		Lang2	OSD language, with Alabic
b6		Lower POS	Lower pos enable(1)
b7		Owner ID	Enable(1)
D7	<u> </u>		1

		PA50M					
option	8	40	Euro option				
	b0	0	ACI all country	ACI enable(1), only Netherlands(0)			
	b1	0	ACI auto MP	ACI auto multi package enable (1)			
	b2	0	ACI offset	ACI offset for VCR prog. enable(1)			
	b3	0	Power up EC-Mode	Power on EC enable (1)			
	b4	0	AVLink	Q-Link off selectable in menu (1)			
	b5	0	Volume correction	TV Volume coorrection enable (1)			
	b6	1	MPX/NICAM display	Display NICAM (0), Display MPX (1)			
	b7	0	Albd Reset Off	enable(1)			
option	9	FF					
	b0	1	CH Plan	ASIA / M.E. / HK/UK / CHINA(1)			
	b1	1		NZ/INDNES(1)			
	b2	1		AUSTRALIA(1)			
	b3	1		E.EUROPE(1)			
	b4	1		SPECIAL(1)			
	b5	1		AMERICA(1)			
	b6	1		CATV(1)			
	b7	1		JAPAN(1)			
option	10	6F					
	b0	1	NICAM priority	ASIA/M.E.(1)			
	b1	1		HK / UK(1)			
	b2	1		CHINA(1)			
	b3	1		NZ / INDN(1)			
	b4	0		AUSTRA(1)			
	b5	1		E.EURO(1)			
	b6	1		SPECIAL(1)			
	b7	0	HDMI AVI Aspect	enable(1)			
option	11	C4	Additional				
	b0	0	Remocon Type	Delux(1) / Leader(0)			
	b1	0	Environment AI (PDP)	enable, with viewing mode auto (1) / disable, without viewing mode auto(0)			
	b2	1	WSS14:9 off	WSS 14:9 off (1)			
	b3	0	IRD Reset Check	ON(1) / OFF(0)			
	b4	0	IRD Polling Check	ON(1) / OFF(0)			
	b5	0	Contrast AI	enable(1) * LCD Only			
	b6	1	Exdac4 Slave address	0x9e(1) / 0x98(0) * PDP Only			
	b7	1	PanelMCUNew	NewMCU(1) / OldMCU(0) :: temp * PDP Only			
option		09	Additional 2				
	b0	1	Aspect memory	evry input source(1) / common(0)			
	b1	0	s / yuv detect(Factory)	enable(0) *LCD Only			
	b2	0	Text Ch Refresh	enable(1)			
	b3	1	Still by Hold-Key	disable(1)			
	b4	0	free				
	b5	0	free				
	b6	0	free				
	b7	0	free				

### 9.4. Option Code Setting

If the memory IC (IC1107) or DG Board is replaced, option code should be re-memorized.

Spare part of IC1107 is already memorized all Data for TH-37/42PA50M.

If you use for other model, you should re-memorized the different option code in SERVICE 2 mode.

Option No.	PA50A	PA50H	PA50M
OPTION1	40	0F	0F
OPTION2	22	E2	E2
OPTION3	3A	1E	1B
OPTION4	D8	48	48
OPTION5	0B	1B	1B
OPTION6	00	00	00
OPTION7	93	A1	B1
OPTION8	40	40	40
OPTION9	06	FF	FF
OPTION10	08	6F	6F
OPTION11	C4	C4	C4
OPTION12	09	09	09
OPTION13	00	00	00

### 10 Adjustment Procedure

### 10.1. Driver Set-up

### 10.1.1. Item / Preparation

1. Input an APL 100 % white signal.

2. Set the picture controls: -

Picture mode: Normal White balance: Cool

Aspect: 16:9


### 10.1.2. Adjustments

Adjust driver section voltages referring the panel data on the panel data label.

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	Vsus ± 1V	R628 (P)	*
Ve	TPVE (SS)	Ve ± 1V	VR6074 (SS)	*
Vset	TPVSET (SC)	232V ± 6V	Fixed	
Vad	TPVAD (SC)	-90V ± 1V	VR6477 (SC)	
Vscn	TPVSCN (SC)	Vad +120V ± 3V	Fixed	
Vda	TPVDA (SS)	67V ± 1V	R665 (P)	
PFC	C448 (+)(-)	395V ± 0.5V	R443 (P)	
Vlow	C557 (+)(-)	73V ± 0.1V	R661 (P)	load current : 0.4A
Csus	TPVsus	164V ± 0.5V	R671 (P)	load current : 1.45A

<sup>\*</sup>See the Panel label.

#### Panel Label information

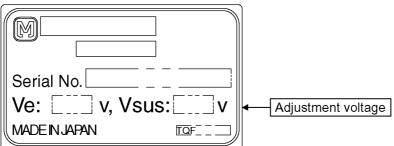


### 10.2. Initialization Pulse Adjust

- 1. Input a Cross hatch signal.
- 2. Set the picture controls: -

Picture mode: Normal White balance: Cool

Adjust the indicated test point for the specified wave form.

	Test point	Volume	Level
T1	TPSC1 (SC)		15 ± 10μ Sec
T2	TPSS1 (SS)	VR6557 (SC)	184 + 5μ / - 10μ Sec

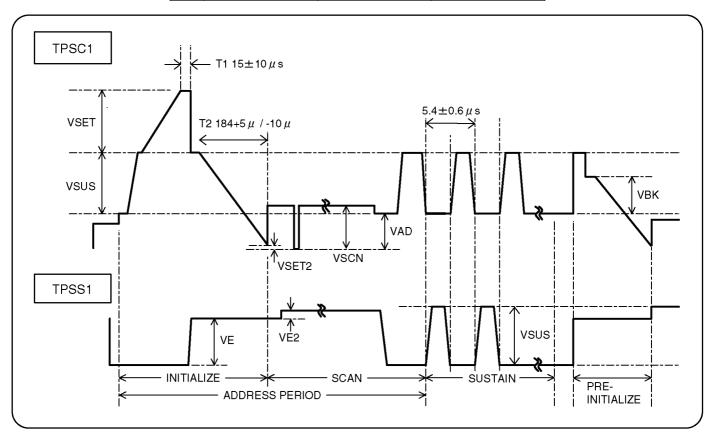

### 10.3. P.C.B. (Printed Circuit Board) exchange

### 10.3.1. Caution


1. To remove P.C.B., wait 1 minute after power was off for discharge from electrolysis capacitors.

### 10.3.2. Quick adjustment after P.C.B. exchange


P.C.B.	Name	Test Point	Voltage	Volume	Remarks	
P Board	Vsus	TPVSUS (SS)	Vsus ± 1V	R628 (P)	*	
	Vda	TPVDA (SS)	67V ± 1V	R665 (P)		
	PFC	C446 (+) (-) (P)	395V ± 0.5V	R443 (P)		
	Vlow	C557 (+) (-) (P)	73V ± 0.1V	R661 (P)	load current : 0.4A	
	Csus	TPVSUS (SS)	164V ± 0.5V	R671 (P)	load current : 1.45A	
SC Board	Vad	TPVAD (SC)	-90V ± 1V	VR6477 (SC)		
SS Board	Ve	TPVE (SS)	Ve ± 1V	VR6074 (SS)	*	
D, DG Board	White blance, Pedestal and Sub brightness for NTSC, PAL, HD, PC and 625i signals					

<sup>\*</sup>See the Panel label.

### 10.4. Adjustment Volume Location

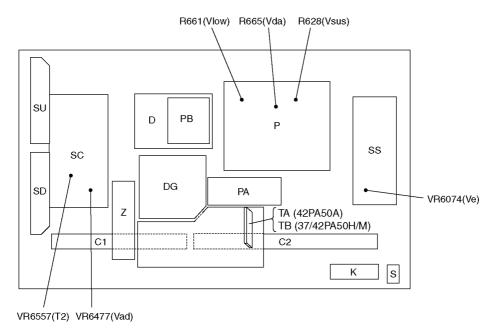

### 10.5. Test Point Location

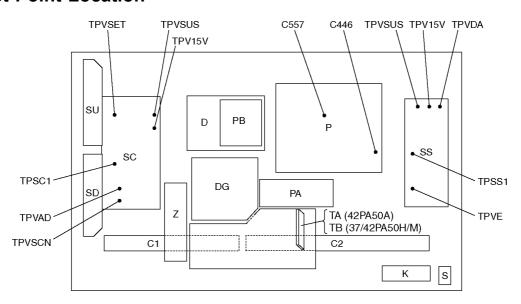

### 11 Adjustment

### 11.1. PAL panel white balance adjustment

Instrument Na	me		Connection	1	Remarks
W/B pattern		RF in			User setting: Normal
Color analyzer (Minolta CA-1)	00 or equivalen	Dana	I surface		
Procedure					Remarks
				Picture menu : Dynamic ASPECT : 16:9	
Make sure the front panel to be used on the final set is fitted.					7.67 267 1 16.6
Make sure a color signal is not being shown before adjustment.					
Put the color analyzer where					
Complete the adjustment with			•		
Turn on the power supply ag	ain where it is r	not possible t	to complete it by ag	ing etc.	Highlight section
1. Display the white balance pa	ttern.				Signal amplitude 75%
2. Check that the color balance	is "cool".				PAL
3. Enter the "Service-Menu1" m	ode.				White Balance
Select "G-CUTOFF" item, us color-key "Yellow" or "Green"		y "Red" or "	Blue", and set to "1	28", using the	Pattern
Also, "B-CUTOFF" and "R-C	JTOFF" set to '	'128"			0 0
5. Set "G-DRIVE" at "224".					
6. Touch the signal receiver of drive and R drive so x, y bec					/ /
7. Set "ALL-DRIVE" to "252".					/ High light 75%
8. Set colorbalance to "Normal"	•				Low light 15%
9. Fix G cutoff, B cutoff and R	cutoff at "128".				Ğ
10. Fix G drive at "224".					
11. Adjust B drive and R drive "Normal" in the below table.	so the highligh	nt window's	x, y become the "	Color balance	
12. Set "ALL-DRIVE" to "252".					
13. Set color balance to "Warm".					
14. Set G cutoff, B cutoff and R	cutoff to "128".				
15. Set G drive to "224".					
16. Adjust B drive and R drive so shown in the below table.	the highlight wi	ndow's x, y b	ecome the "Color b	alance Warm"	
17. Set "ALL-DRIVE" to "252".					
Toble 1 Colember	noo taraat yali	10			
Table 1, Color bala Color temperat	1 -		V	1	
Cool		276	0.276	1	
Normal		288	0.296	†	
Warm		313	0.329	1	
Table 2, Cut off da	<u> </u>			-	
Color	R	G	В		
temperature					
Cool	Cool A0-024B A0-024E A0-0251				
Normal A0-024A A0-024D A0-0250					
Warm A0-0249 A0-024C A0-024F					
Table 3, Drive data					
Color temperature	R	G	В		
Cool	A0-0239	A0-023C	A0-023F		
Normal	A0-0238	A0-023B	A0-023E		
Warm	A0-0237	A0-023A	A0-023D		

Instrument Name			Connection	1	Remarks
• 1080i W/B pattern			ent terminal		User setting: Normal
Color analyzer (Minolta CA-100 or	equivalent)	Panel s	ипасе 		
English to adapt to the control of	Procedure				Remarks
,					Picture menu: Dynamic ASPECT:16:9
<ul> <li>Make sure the front panel to be us</li> </ul>					7101 201110.0
<ul> <li>Make sure a color signal is not be</li> </ul>	ing shown befo	re adjustn	nent.		
<ul> <li>Put the color analyzer where there</li> </ul>	is little color v	ariation.			
<ul> <li>Complete the adjustment within 10</li> </ul>	) minutes after	the turn of	n electricity.		
Turn on the power supply again w	hen it is not po	ssible to c	complete it by agi	ng etc.	Highlight section
Display the white balance pattern.					Signal amplitude 75%
2. Check that the color balance is "co	ool".				1080i
3. Enter the "Service-Menu1" mode.					White Balance
<ol> <li>Select "G-CUTOFF" item, using the color-key "Yellow" or "Blue".</li> </ol>	e color-key "Re	ed" or "Gre	en", and set to "	28", using the	Pattern <b>Pattern</b>
Also, "B-CUTOFF" and "R-CUTOF	F" set to "128'	,			
5. Set "G-DRIVE" at "224".					
6. Touch the signal receiver of color drive and R drive so x, y become					<u> </u>
7. Set "ALL-DRIVE" to "252".					/ / High light 75%
8. Set colorbalance to "Normal".					High light 75% Low light 15%
9. Fix G cutoff , B cutoff and R cutoff	f at "128".				* The Color balance COOL differs fro
0. Fix G drive at "224".					Japanese model values.
Adjust B drive and R drive so the "Normal" in the below table.	ne highlight wi	ndow's x,	y become the "	Color balance	
2. Set "ALL-DRIVE" to "252".					
3. Set color balance to "Warm".					
4. Set G cutoff, B cutoff and R cutoff	to "128".				
5. Set G drive to "224".					
<ol><li>Adjust B drive and R drive so the h shown in the below table.</li></ol>	ighlight windov	v's x, y bec	come the "Color b	alance Warm"	
7. Set "ALL-DRIVE" to "252".					
Table 1, Color balance	target value	<u>.</u>			
	X		у		
Cool Normal	0.276 0.288		0.276 0.296		
Warm 0.313 0.329					
Table 2, Cut off data a	ddress (HD/P	C)			
Color balance	R R	G G	В		
		40-0257	A0-025A		
		40-0256	A0-0259		
Warm /	40-0252	40-0255	A0-0258		

Table 3, Drive data address (HD/PC)

Calambalanaa			П
Color balance	H	G	В
Cool	A0-0242	A0-0245	A0-0248
Normal	A0-0241	A0-0244	A0-0247
Warm	A0-0240	A0-0243	A0-0246

### 11.3. Sub bright adjustment

Instrument Name	Connection	Remarks	
1. PAL signal generator (or RF)	User setting: Normal		
Procedure	Procedure		
Color balance adjustment is finished for each signs	al.	Picture menu: Dynamic	
Do adjustments in a dark room.		Color balance: Normal ASPECT: 16:9	
Complete the adjustment within minutes after the t	urn on electricity.		
Turn on the power supply again when it is not poss		* If using RF ch.E04, (Sub-Bright test pattern),	
Display the pattern for adjusting subbright from vid	eo input.	adjust so the 6th section shows up and the 7th fades away.	
2. Pull down SRQ of the panel D-Board to L.		laues away.	
3. Use "Sub-Bright" in the "Service-Menu1" mode to 7th fades away.	adjuct so the 6th section shows up and		
PAL Sub Bright 10mV 0m Pattern	PAL Sub Bright 10mV 0mV		

### 11.4. ABL adjustment


Instrument Name	Connection		Remarks
1. HD signal emitter (or Leader: 1080i/No.9 Signal)     2. Wattmeter	COMPONENT input terminal Connect the AC power of the adjustment set to the wattmeter.		
Procedure			Remarks
<ul> <li>Make sure the set is aged for 30 minutes or more during or after aging.)</li> </ul>	, ,		
Voltage 230V 50Hz (variation within 1%)		According to the used	e line condition,100V can be
Volume at minimum and screen size at "16:9"		acca	
Setting			
Component input, dynamic, standard			
Connect the set's AC power to the wattmeter.			
2. Input the Signal (top half: color bar, Bottom half: H	orizontal losteps bar).		
3. Select the "APL MULT" item in the Service1.			
4. Adjust APL MULT so the set's power consumption	is		
TH-37PA50H/M 239(+5/-10)w			
TH-42PA50A/H/M 309(+5/-10)w			
1. The initial data are			
0×1E for 37/42SD (A0-0626)			
2. The power and data are in reverse relationship			
(Lower the data to raise the power.)			
<ul> <li>Raising direction (↑):20 → 1F</li> </ul>			
<ul> <li>Lowering direction (↓):20 → 1A</li> </ul>			
There is a possibility that the adjustment value can the value of APL_MULT is large.	do two places adjust it in that case, that		

### 12 Hotel mode

#### 1. Purpose

Restrict a function for hotels.

- 2. Access command
  - Enter to the Service 2 Mode.
  - Press Status button on remote control and entry to the EAROM EDITOR Mode.
  - Press the RED/GREEN button to step up/down through the address.
  - Press the YELLOW/BLUE button to step left/right through the address.
  - Press the PROGRAMME UP/DOWN button to step up/down through the page.
  - Press the VOLUME UP/DOWN button to change the function values.
  - Set the data of EEPROM(ADDRESS 140) to 80.
  - Press the OK button to memorize the data.



Push the Power switch(button) off/on the set(the remote control) to turn the set off/on.

It can be made Hotel mode.

#### 3. Exit command

First, set the data of EEPROM(ADDRESS 140) to 00.
 Next, Push the Power switch(button) off/on the set(the remote control) to turn the set off/on.


Then, it is no longer hotel mode.

- 4. Access command to the Hotel mode setup menu
  - Prerequisite: It is conditions that the data of EEPROM(ADDRESS 140) is 80.

In order to display the Hotel mode setup menu, please enter the following command (within 2 second).

[TV]:down + [REMOTE]:TV/AV(3 times)

Then, the Hotel mode setup menu is displayed.



5. Explain the Hotel mode setup menu

#### **CAUTION**


This setup is not valid, unless data of EEPROM(ADDRESS 140) will be 00, even if each settings were done.

	ere done.				
item	Function				
Initial INPUT	Select input signal modes. Set this signal, each time power is switched on. Selection:				
	Off/TV/AV1/AV2/AV2S/AV3/Av3S/AV4/Av4S/AV4 C/PC				
	Off: give priority to a last memory. However, Euro model is compulsorily set to TV.				
	AVnS/AVnC: only Euro model selectable				
	PC: selectable with VGA option				
Initial VOL level	Adjust output Volume. Set this volume, each time power is switched on. If the value of InitVol is changed, volume will change. However, priority is given to a last memory when InitVol is Off. When "InitVol" is larger than "MaxVol", make "InitVol" and "MaxVol" the same. Selection/Range: Off/0 to 100  • Off: give priority to a last memory				
Maximum VOL level	Adjust maximum volume. Set this max. volume, each time power is switched on. When "MaxVol" is smaller than "InitVol", make "MaxVol" and "InitVol" the same, if "InitVol" is not Off.				
	Range : 0 to 100				
Initial POS	Select programme number. Set this programme number, each time power is switched on. Selection: Off/0 to 99 (Euro model) • Off: give priority to a last memory				
Button lock	Select local key conditions. Set this condition, each time power is switched on. Selection: Off/SETUPMENU/All • Off: altogether valid				
	SETUP: restrict F-key selection				
	(Tuning guide(menu) can not be selected.)				
	MENU: restrict F-key selection				
	(only Volume/Mute can be selected.)				
	All: altogether invalid.				
Remote lock	Select remote control key conditions. Set this condition, each time power is switched on. Selection: Off/SETUP/MENU  Off: altogether valid				
	SETUP: only Setup menu is invalid				
	MENU: Picture/Sound/Setup menu are invalid				

### **13 Conductor View**

### 13.1. P-Board

P-BOARD (FOIL SIDE) TNPA3570 TH-42PA50A/H/M TH-37PA50H/M P-BOARD TNPA3570 TH-42PA50A/H/M TH-37PA50H/M P-BOARD TNPA3570

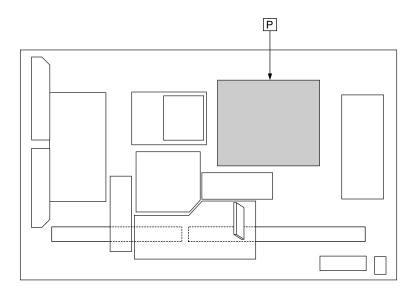

### **Parts Location**


P-BOARD (FOIL SIDE)									
IC401 IC402	G-4 F-3	Q401 Q403		Q441 Q501 Q502	G-4 H-5 H-5	Q553 Q554 Q557 Q558	E-5 E-5 G-5 F-5		
IC403 IC404 IC406 IC407 IC408 IC409 IC411 IC412	F-4 F-4 D-1 G-4 G-5 F-3 G-4	Q404 Q406 Q407 Q408 Q409 Q412 Q413 Q414	C-2 Q503 C-2 Q505 C-1 Q506 C-1 Q507 C-3 Q508 C-3 Q509 C-3 Q510 C-3 Q511	Q505 Q506 Q507 Q508 Q509 Q510 Q511	D-5 B-5 B-5 B-5 B-5 E-5 E-5 D-4 F-4 F-5 D-4 F-5 D-4 F-5 D-5 D-5 D-5 D-5 D-5 D-5 D-5 D-5 D-5 D	Q558 Q559 Q560 Q561 Q562 Q564 Q565 Q567	F-5 G-5 F-5 G-5 F-5 F-5 F-5		
IC431 IC501 IC502 IC503 IC504 IC505 IC506 IC507 IC509 IC512 IC520	F-4 H-5 F-5 G-5 C-5 C-5 H-5 C-5 D-6 E-5	Q415 Q417 Q418 Q420 Q421 Q422 Q423 Q424 Q430 Q431 Q432 Q435 Q436 Q438 Q439 Q440	H-4 G-3 F-3 D-1 F-3 D-1 H-4 H-4 G-3 E-3 G-3 G-4 H-4 H-4 G-4 E-2 E-2	Q512 Q516 Q517 Q518 Q519 Q520 Q525 Q527 Q530 Q535 Q536 Q537 Q538 Q541 Q542 Q544 Q550		TP  TP1  TP2  TP3  TP4  TP5  TP6  TP7  TP8	B-3 B-3 B-2 B-2 C-2 C-1 C-1 B-1		

TH-42PA50A/H/M TH-37PA50H/M P-BOARD PARTS LOCATION

### **Parts Location**


P-BOARD (COMPONENT SIDE)						
IC		TRANSISTOR				
IC406 IC503 IC504 IC509 IC512	F-1 D-5 C-5 G-5 F-6	Q404 Q406 Q412 Q413 Q430 Q431 Q432 Q434 Q436	G-1 G-2 G-3 G-3 B-3 D-3 C-3 B-4			
		Q505 Q507 Q518 Q519 Q527	F-5 G-5 D-4 D-5 F-5			


TH-42PA50A/H/M TH-37PA50H/M P-BOARD PARTS LOCATION

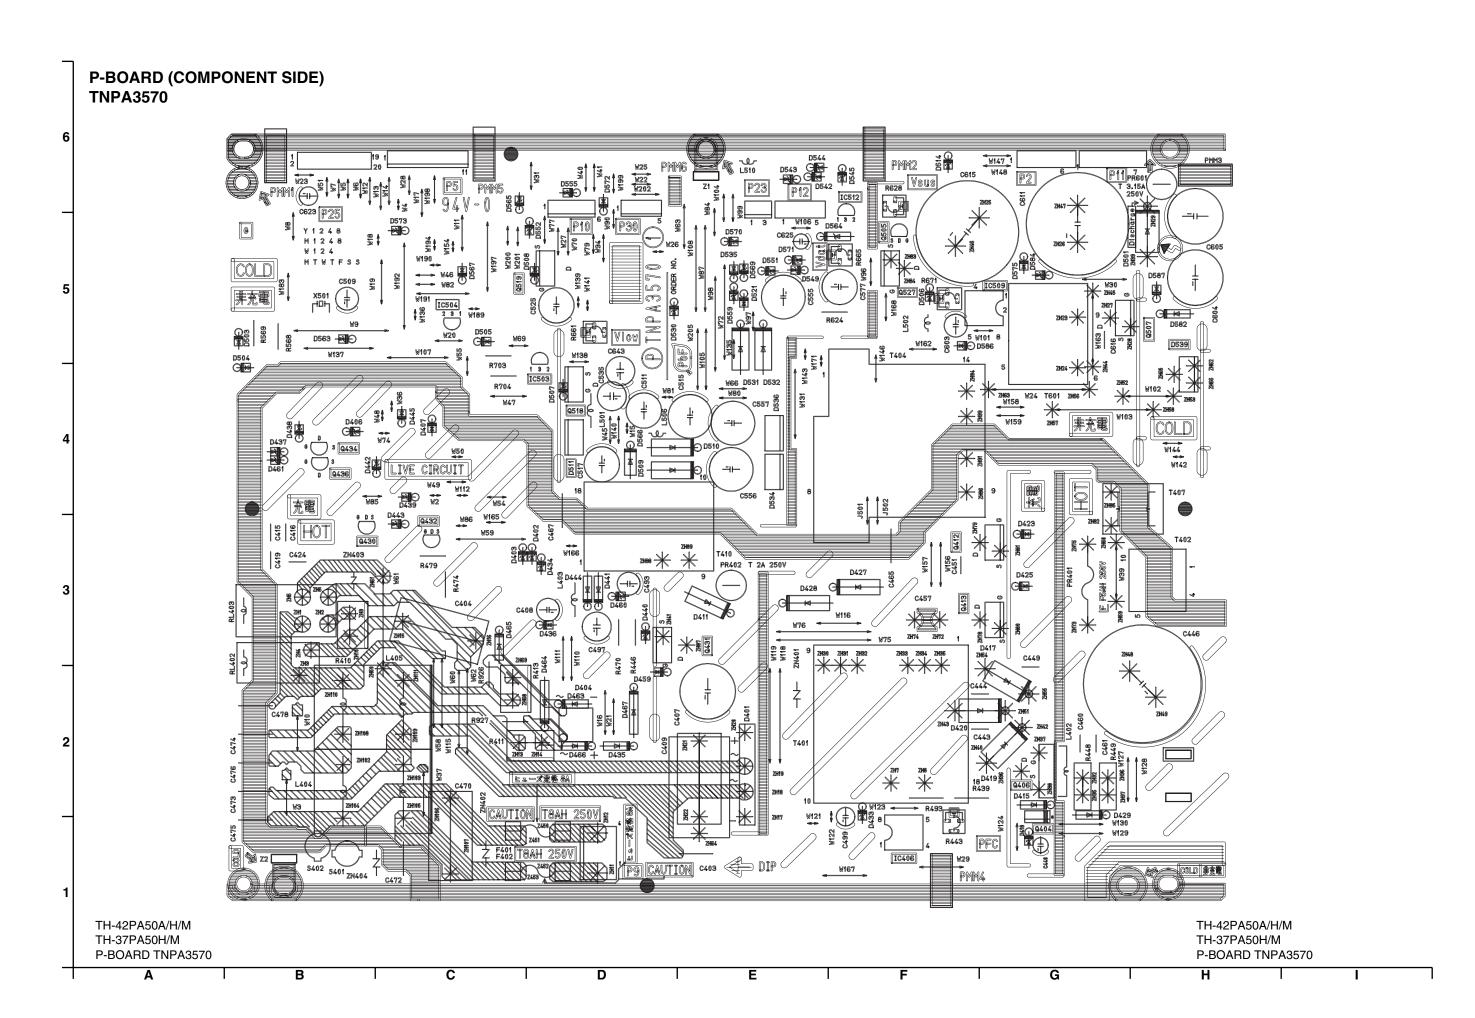

## 13.2. PA-Board


PA-BOARD(FOIL SIDE) TNPA3620AB

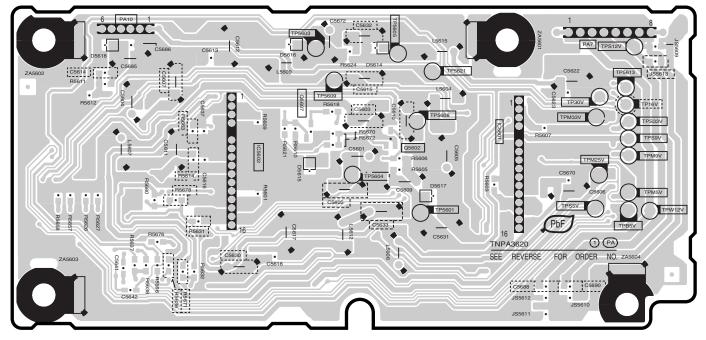

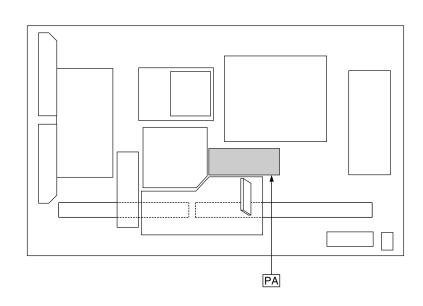

### PA-BOARD(COMPONENT SIDE) TNPA3620AB

В

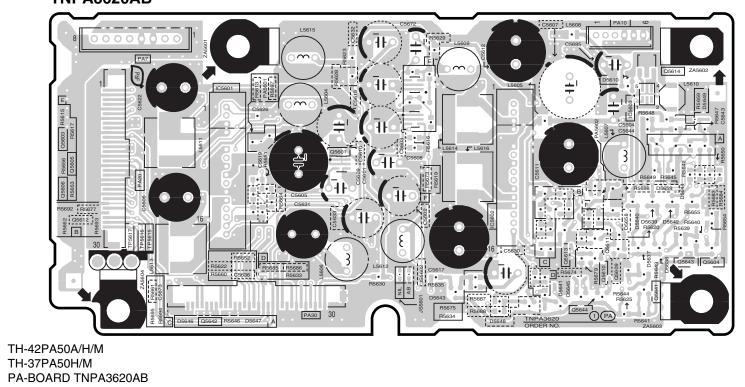

С

#### **Parts Location**


PA-BOARD					
IC		TP	TP		
IC5601	B-2	TP5601	C-4		
IC5602	D-2	TP5603	C-5		
IC5603	E-2	TP5604	C-4		
		TP5605	C-5		
TRANSISTO	R	TP5608	C-5		
Q5601	C-2	TP5609	C-5		
Q5602	D-5	TP5621	C-5		
Q5603	A-2	TP16V	E-5		
Q5604	E-1	TP30V	E-5		
Q5605	2	TPB5V	E-4		
Q5606	A-2	TPM25V	E-5		
Q5607	C-5	TPM33V	E-5		
Q5609	E-1	TPM5V	E-5		
Q5610	E-1	TPM9V	E-5		
Q5612	A-2	TPS12V	E-5		
Q5613	D-1	TPS33V	E-5		
Q5614	E-3	TPS5V	E-4		
Q5641	E-1	TPS9V	E-5		
Q5642	B-1	TPW12V	E-4		
Q5643	E-1				
Q5644	D-1				

Н


TH-42PA50A/H/M TH-37PA50H/M PA-BOARD TNPA3620AB


38

### 13.3. PB-Board

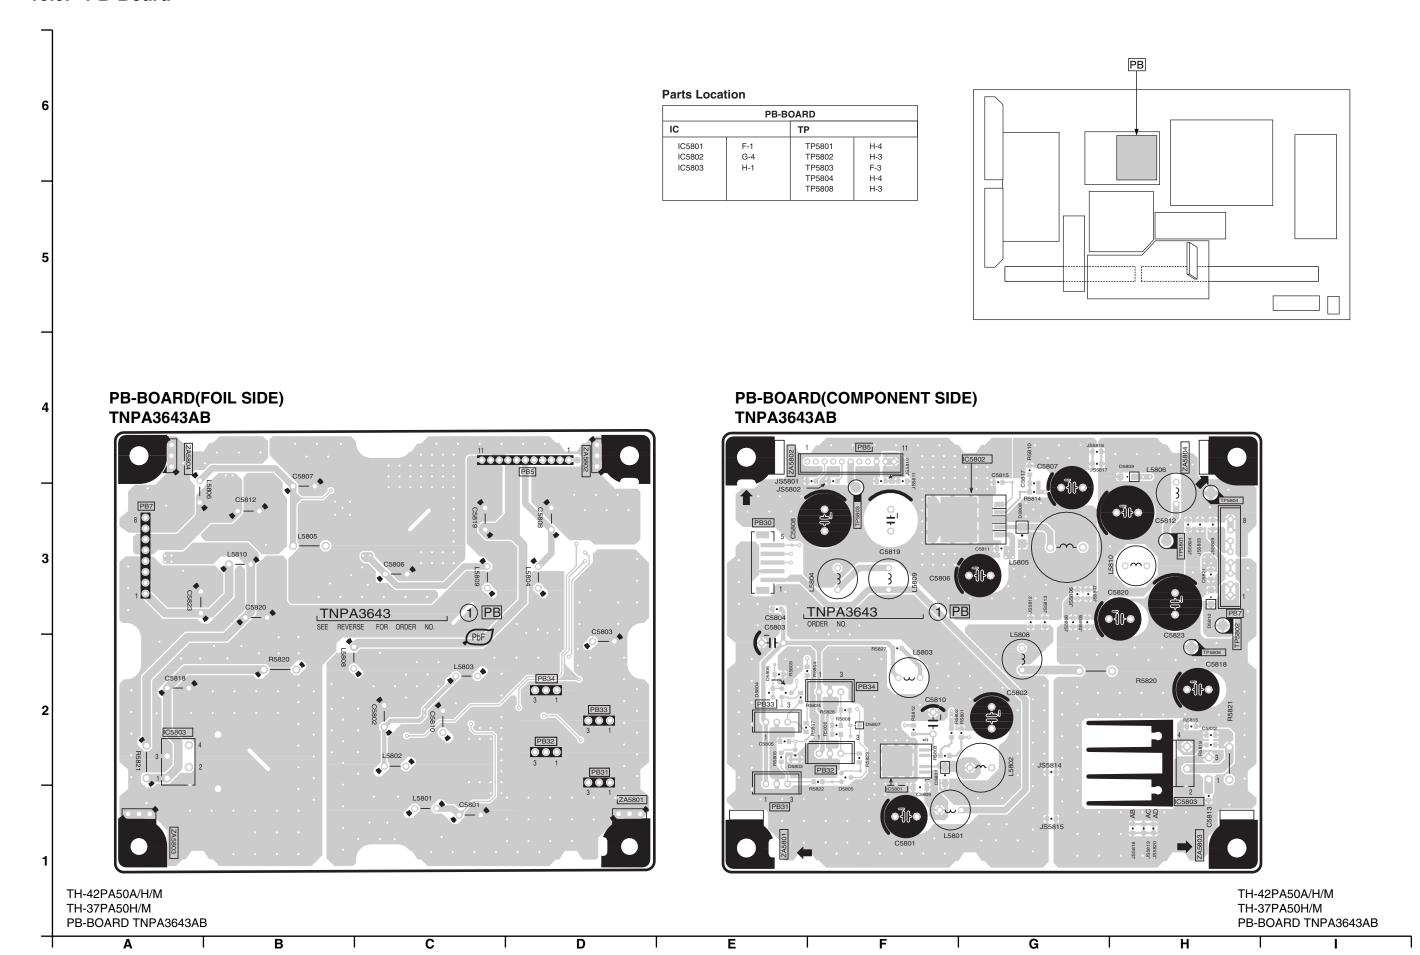



### 13.4. H-Board

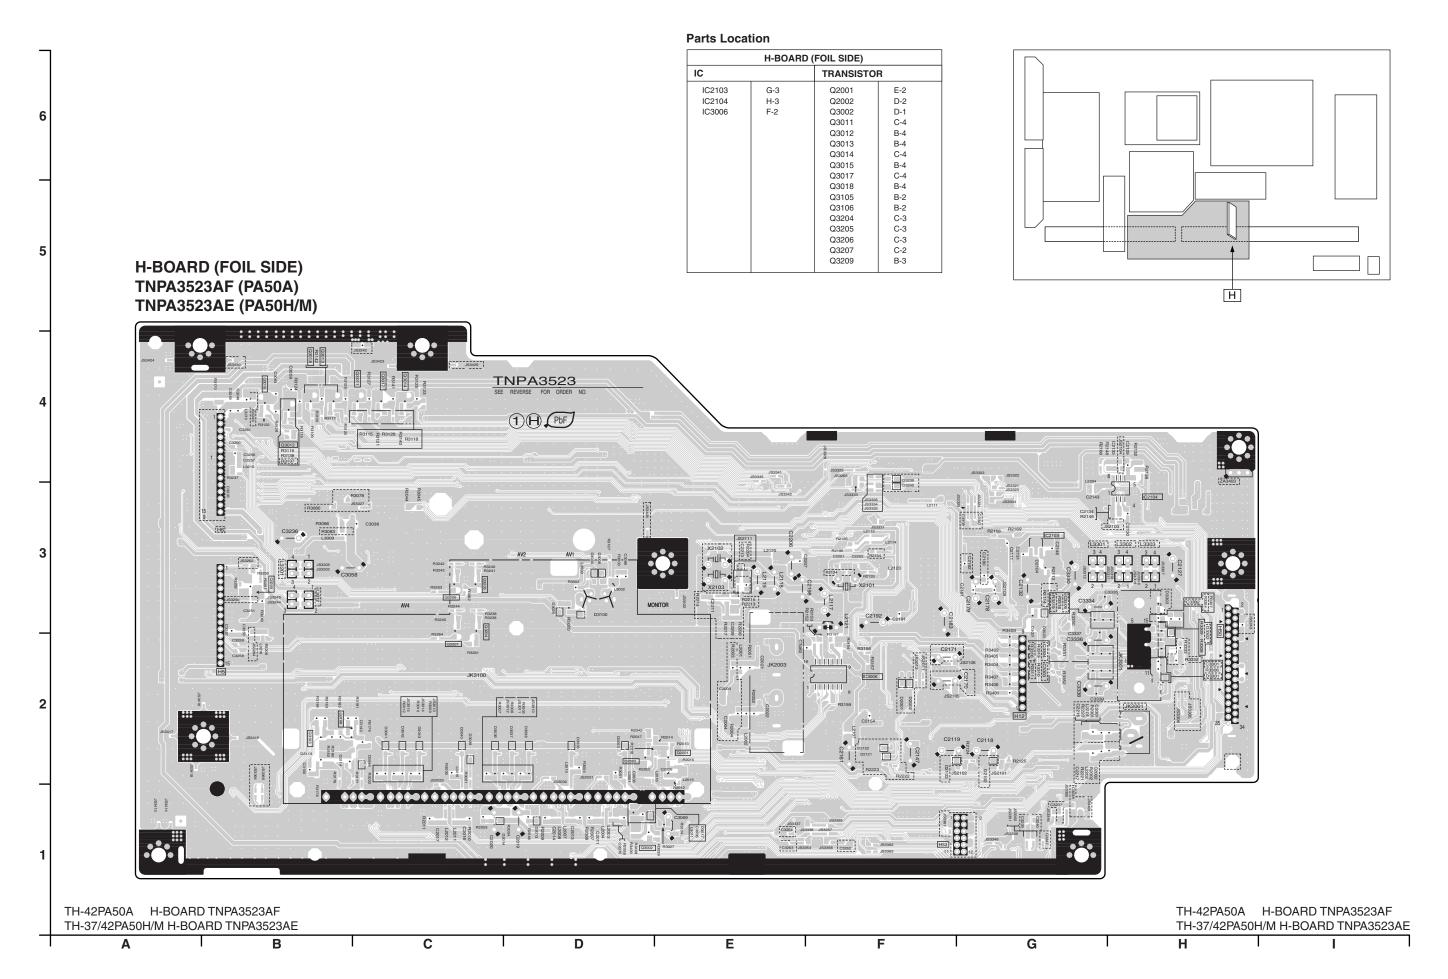

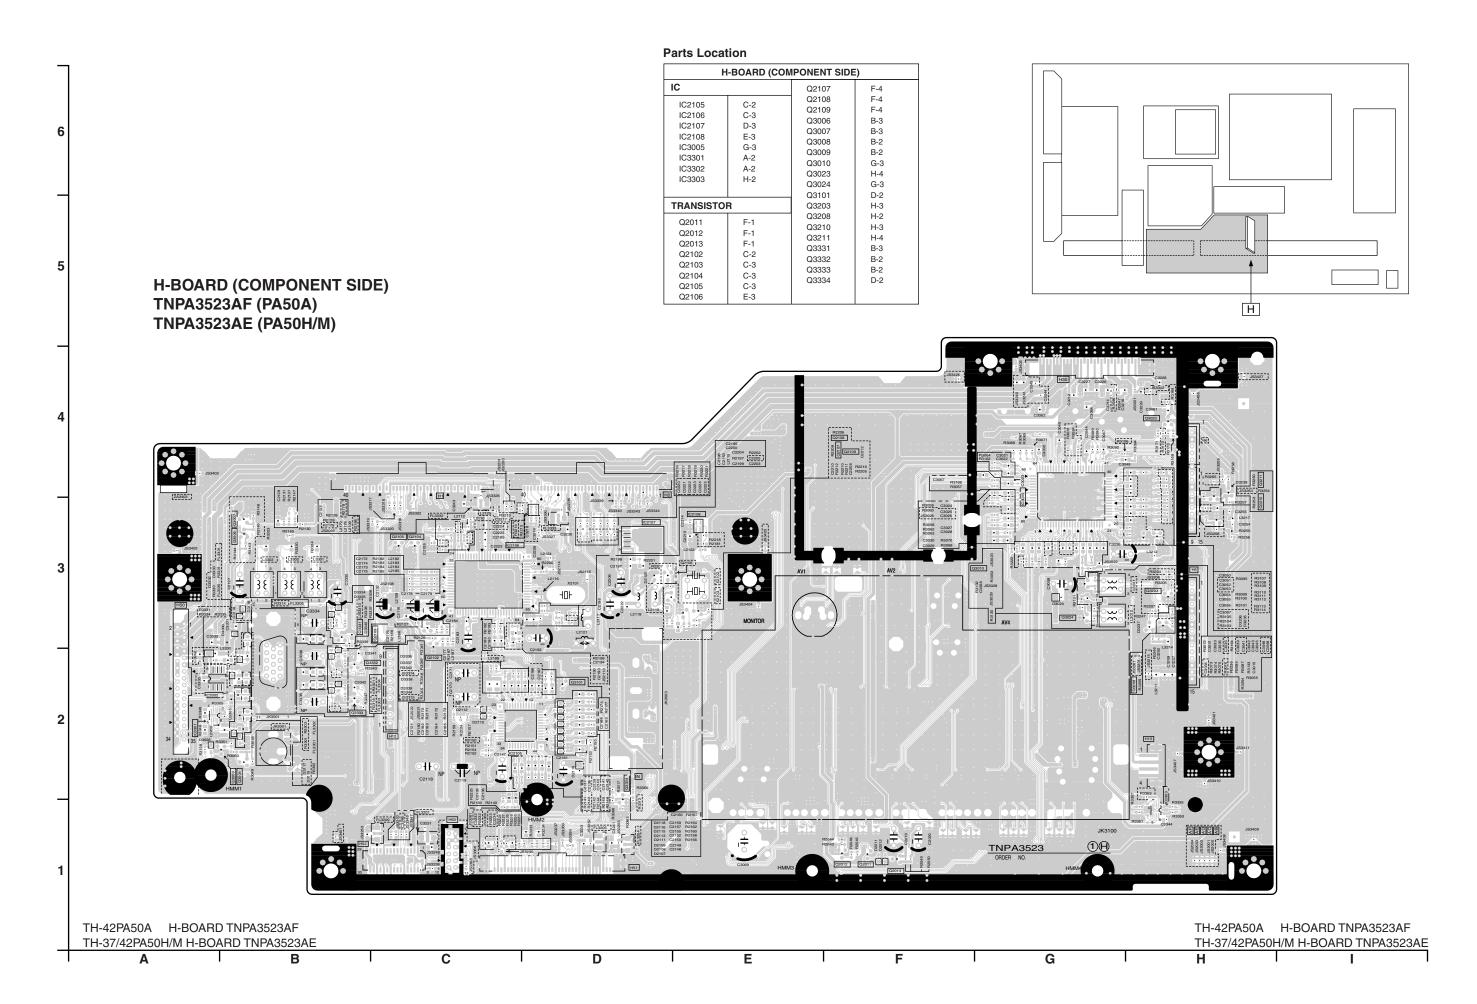


### 13.5. DG-Board

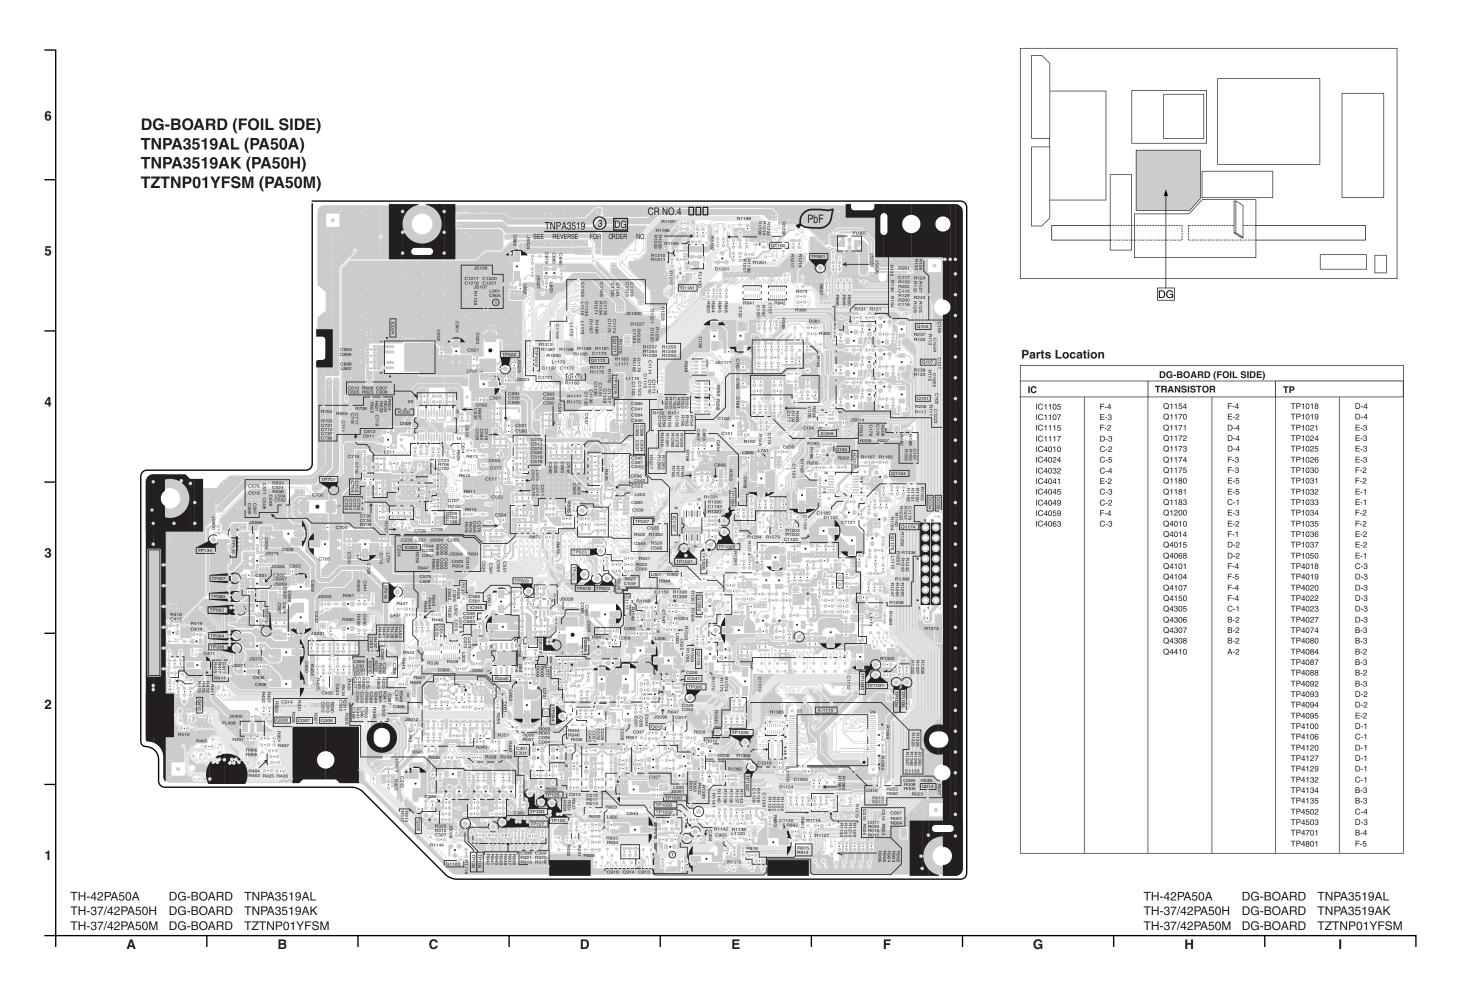


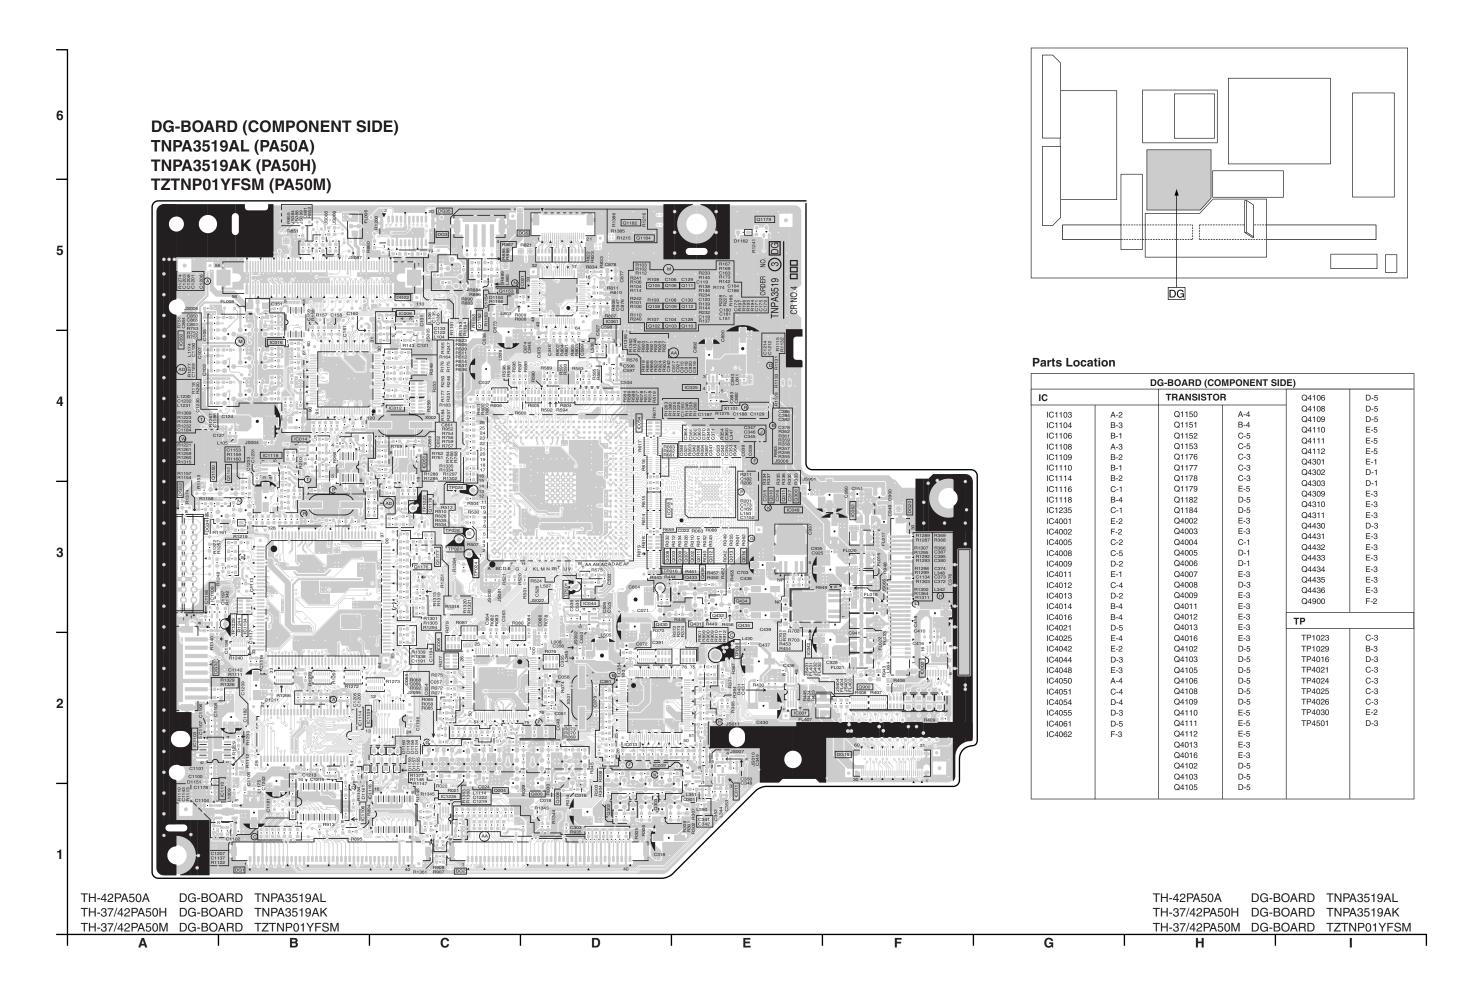

### 13.6. TA-Board

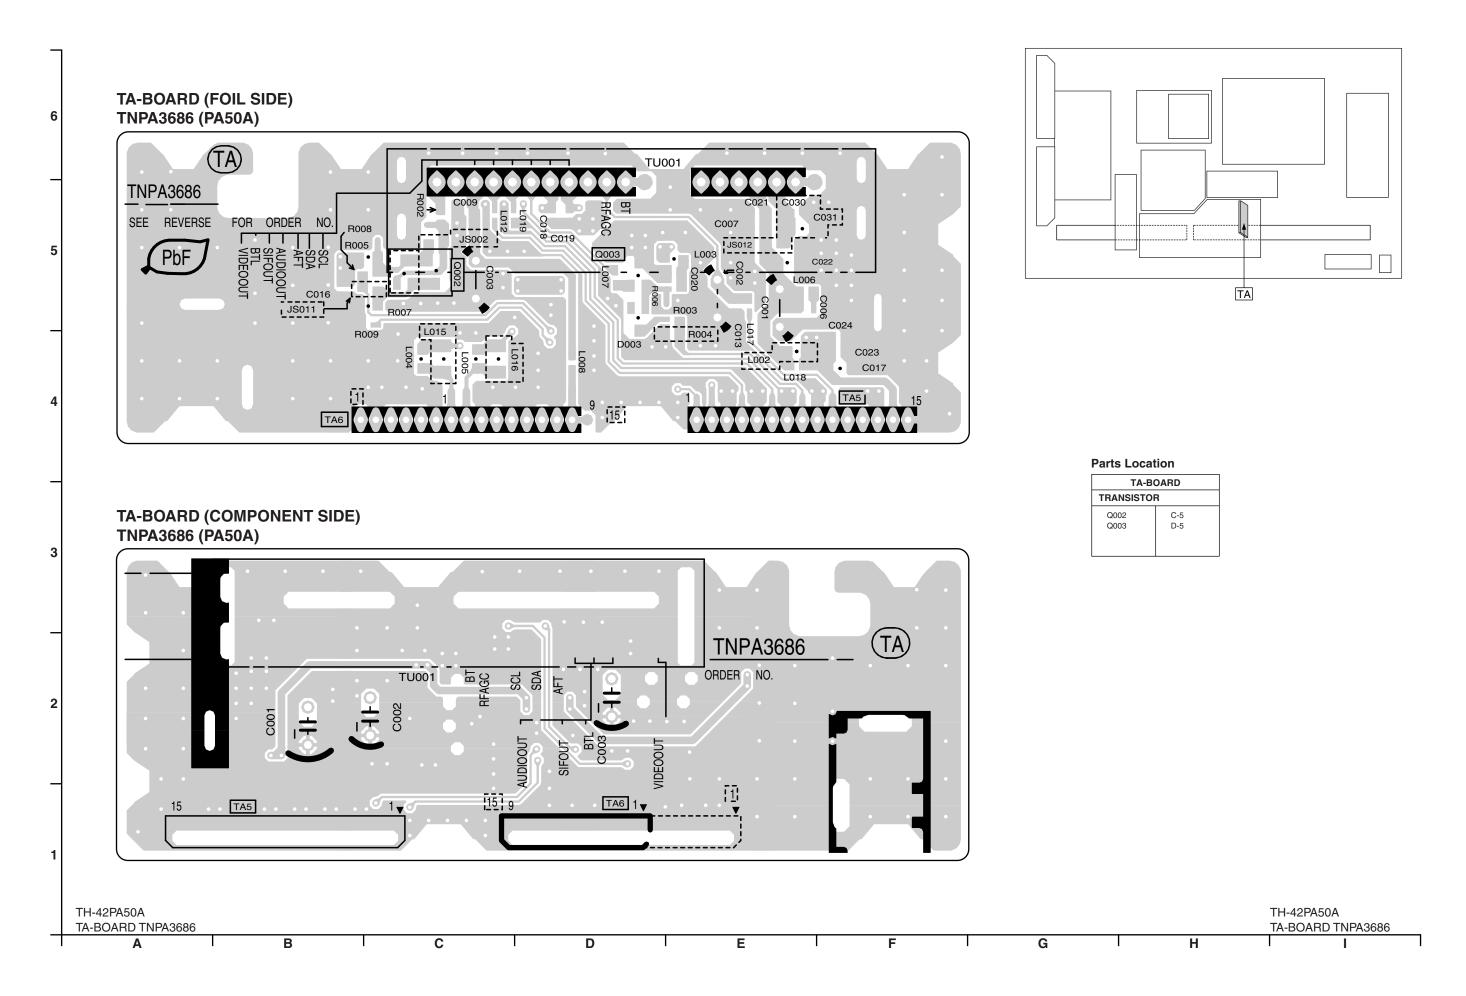



### 13.7. TB-Board

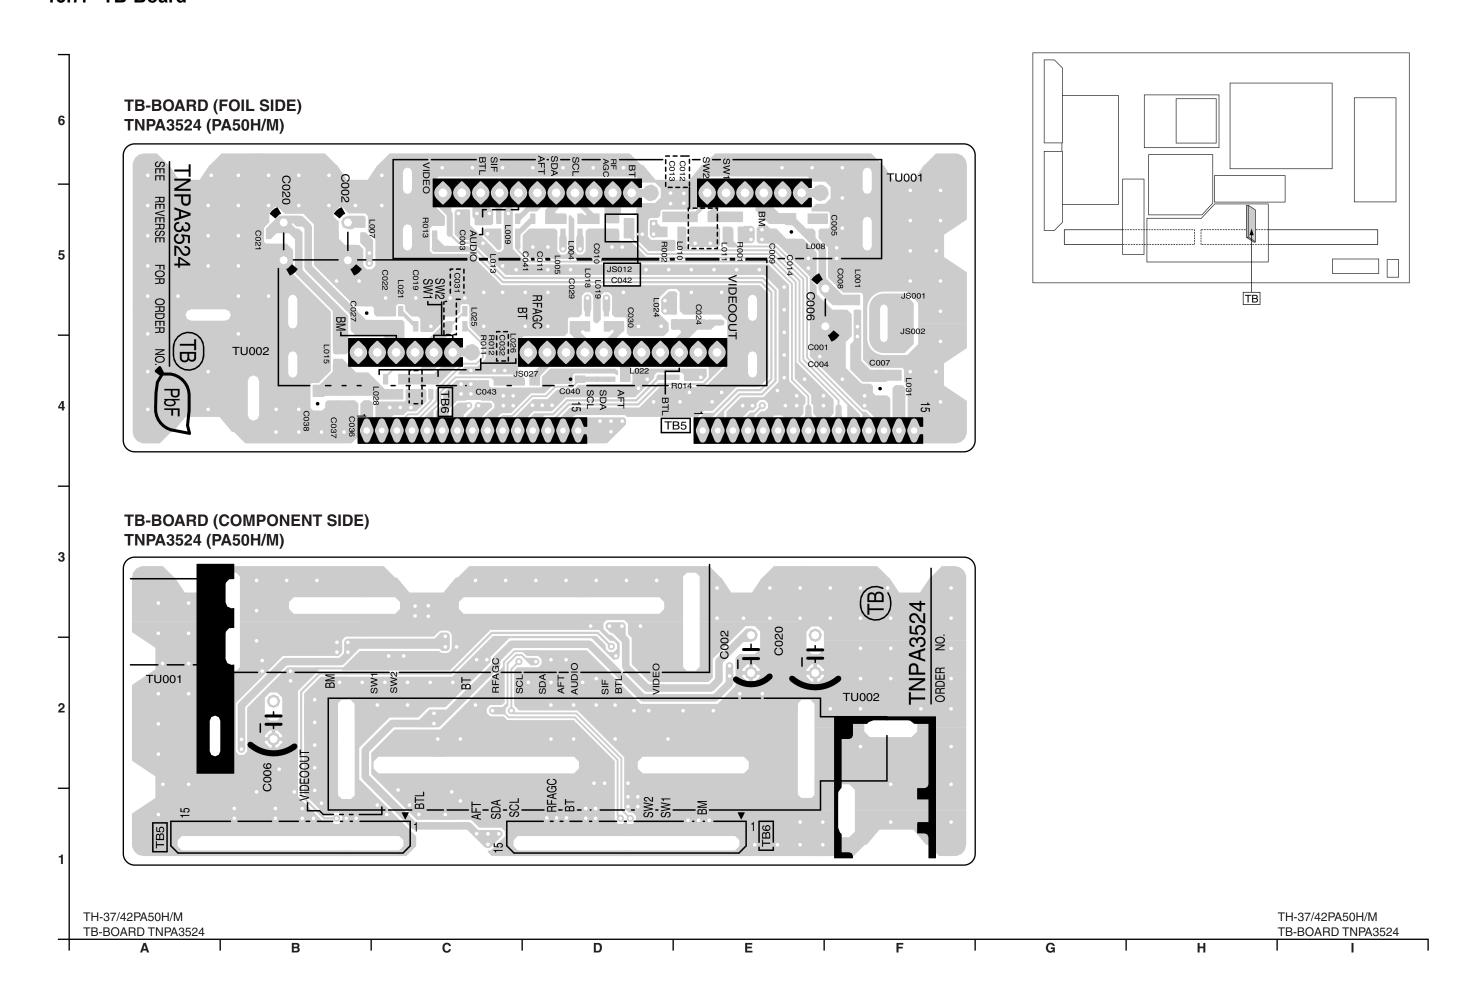


## 13.8. **Z-Board**

Z-BOARD (FOIL SIDE) TNPA3621AE

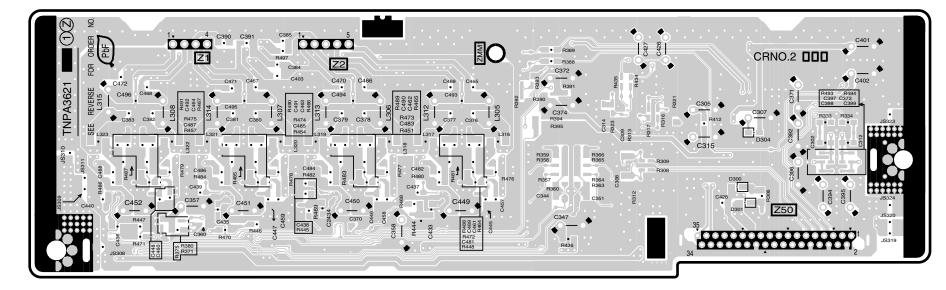

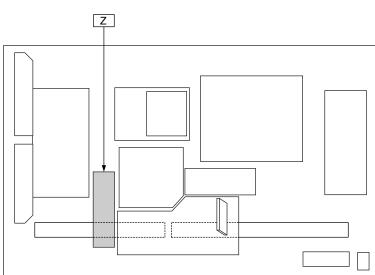

## Z-BOARD (COMPONENT SIDE) TNPA3621AE

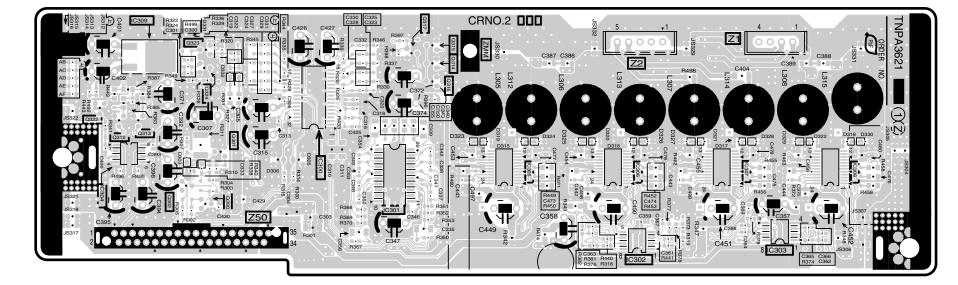


#### **Parts Location**


	Z-BOARD						
IC			TRANSISTOR				
IC230 IC230 IC230 IC230 IC230 IC230 IC230 IC230 IC230	1 1 2 3 3 4 4 5 6 6 7	C-2 C-2 E-2 F-2 D-2 E-2 E-2 E-2 F-2	Q2300 Q2301 Q2302 Q2312 Q2313 Q2314 Q2315 Q2316 Q2317 Q2322 Q2323 Q2324	B-2 B-2 B-2 A-2 B-2 D-3 D-3 C-3 A-2 B-3			

TH-42PA50A/H/M TH-37PA50H/M Z-BOARD TNPA3621AE TH-42PA50A/H/M TH-37PA50H/M Z-BOARD TNPA3621AE

46

### 13.9. **D-Board**

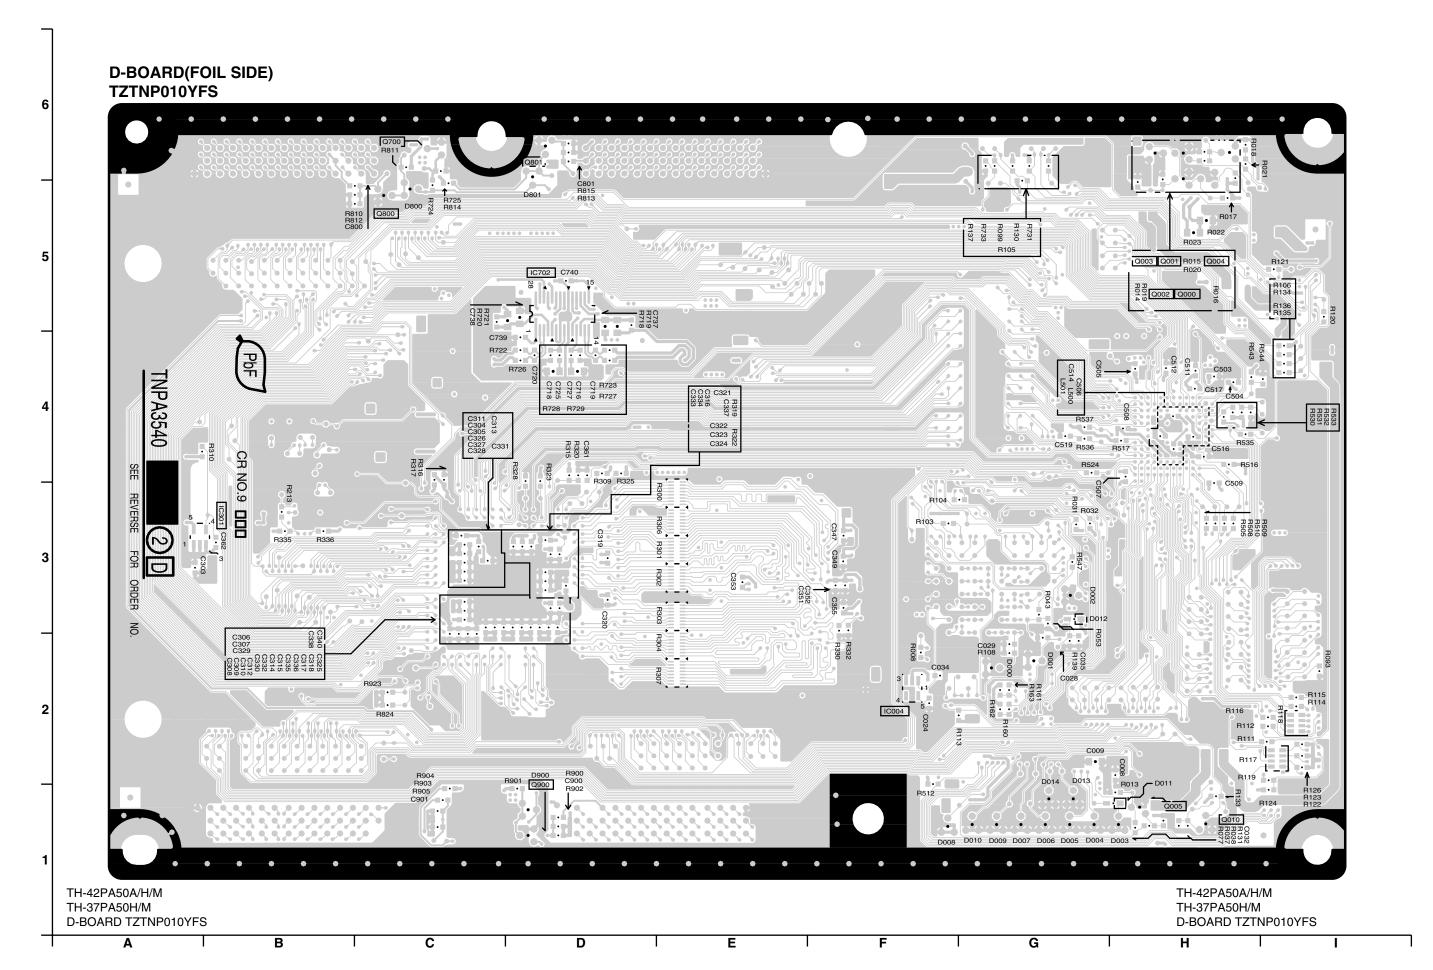

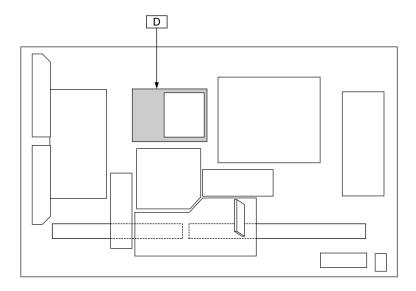


#### **Parts Location**

D-BOARD (FOIL SIDE)					
IC TRANSISTOR					
IC9004 IC9301 IC9702	F-2 B-3 D-5	Q9000 Q9001 Q9002 Q9003 Q9004 Q9005 Q9010 Q9700 Q9800 Q9801 Q9900	H-5 H-5 H-5 H-5 H-1 H-1 C-6 C-5 D-6		


#### **Parts Location**

D-BOARD (COMPONENT SIDE)						
IC		TRANSISTOR		TP		
IC9001	B-1	Q9008	C-3	TP9013	B-1	
IC9003	C-2	Q9009	C-3	TP9300	F-4	
IC9005	B-3	Q9011	B-2	TP9301	F-4	
IC9006	A-2	Q9012	B-3			
IC9007	A-2	Q9013	B-3			
IC9008	B-5	Q9020	B-2			
IC9200	H-4	Q9021	B-2			
IC9300	G-2	Q9022	B-3			
IC9302	E-2	Q9023	B-3			
IC9303	G-2	Q9500	C-3			
IC9500	B-4	Q9701	E-5			
IC9502	C-2	Q9702	G-5			
IC9503	C-2	Q9703	F-5			
IC9504	C-5	Q9704	F-5			
IC9700	D-5	Q9901	G-1			


TH-42PA50A/H/M TH-37PA50H/M D-BOARD PARTS LOCATION TH-42PA50A/H/M TH-37PA50H/M D-BOARD PARTS LOCATION

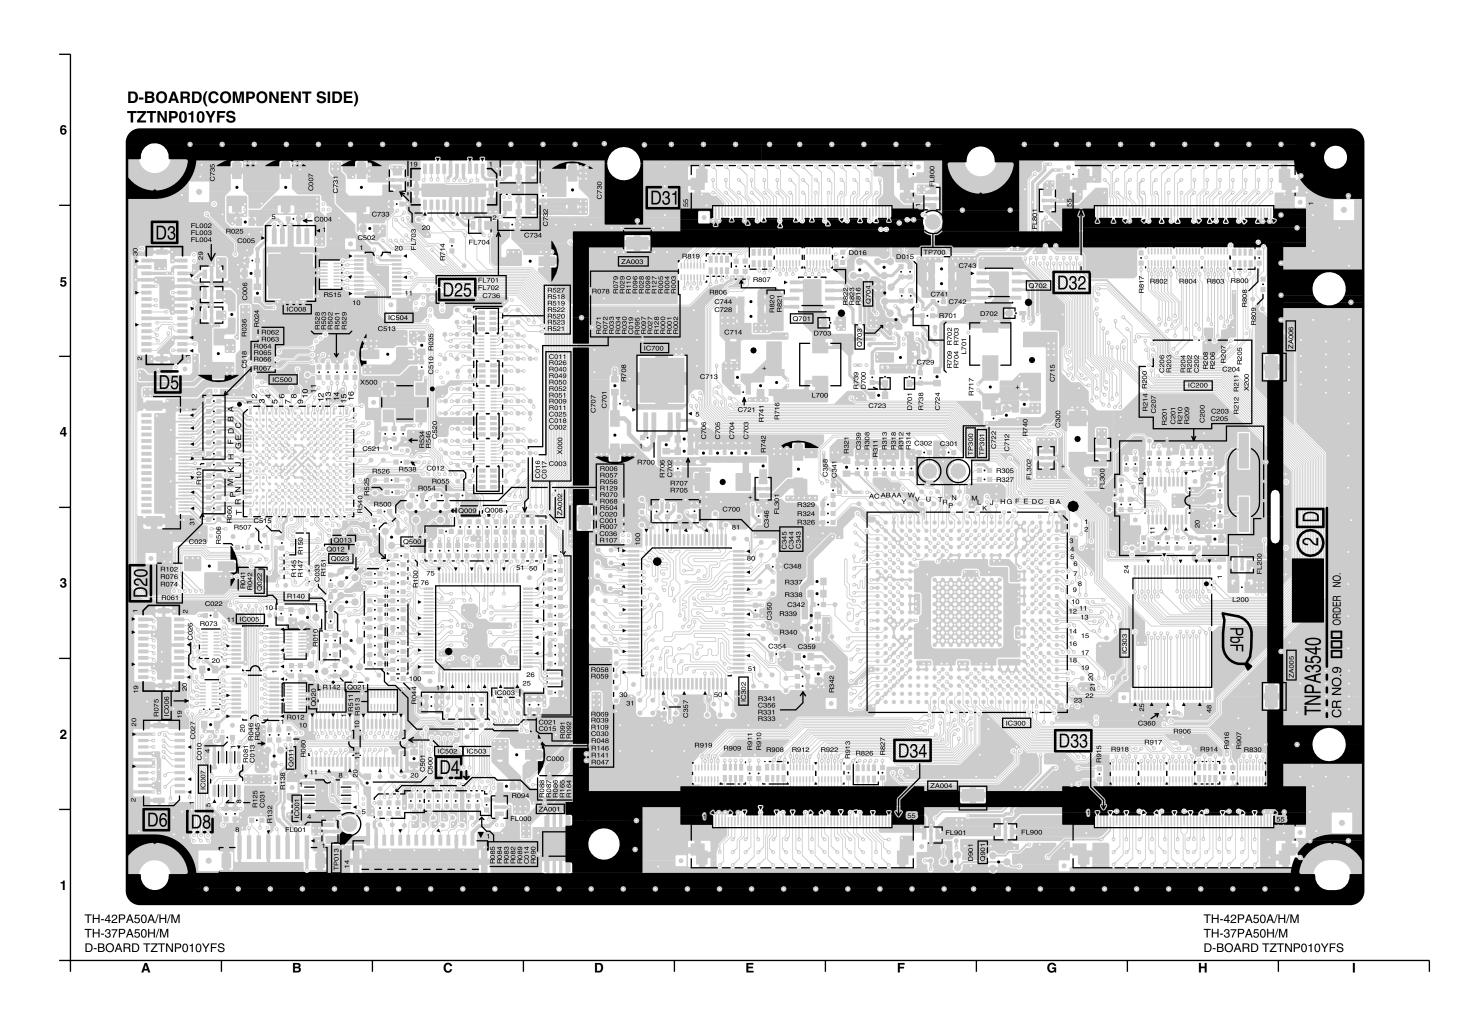


## 13.10. C1-Board (37 inch)

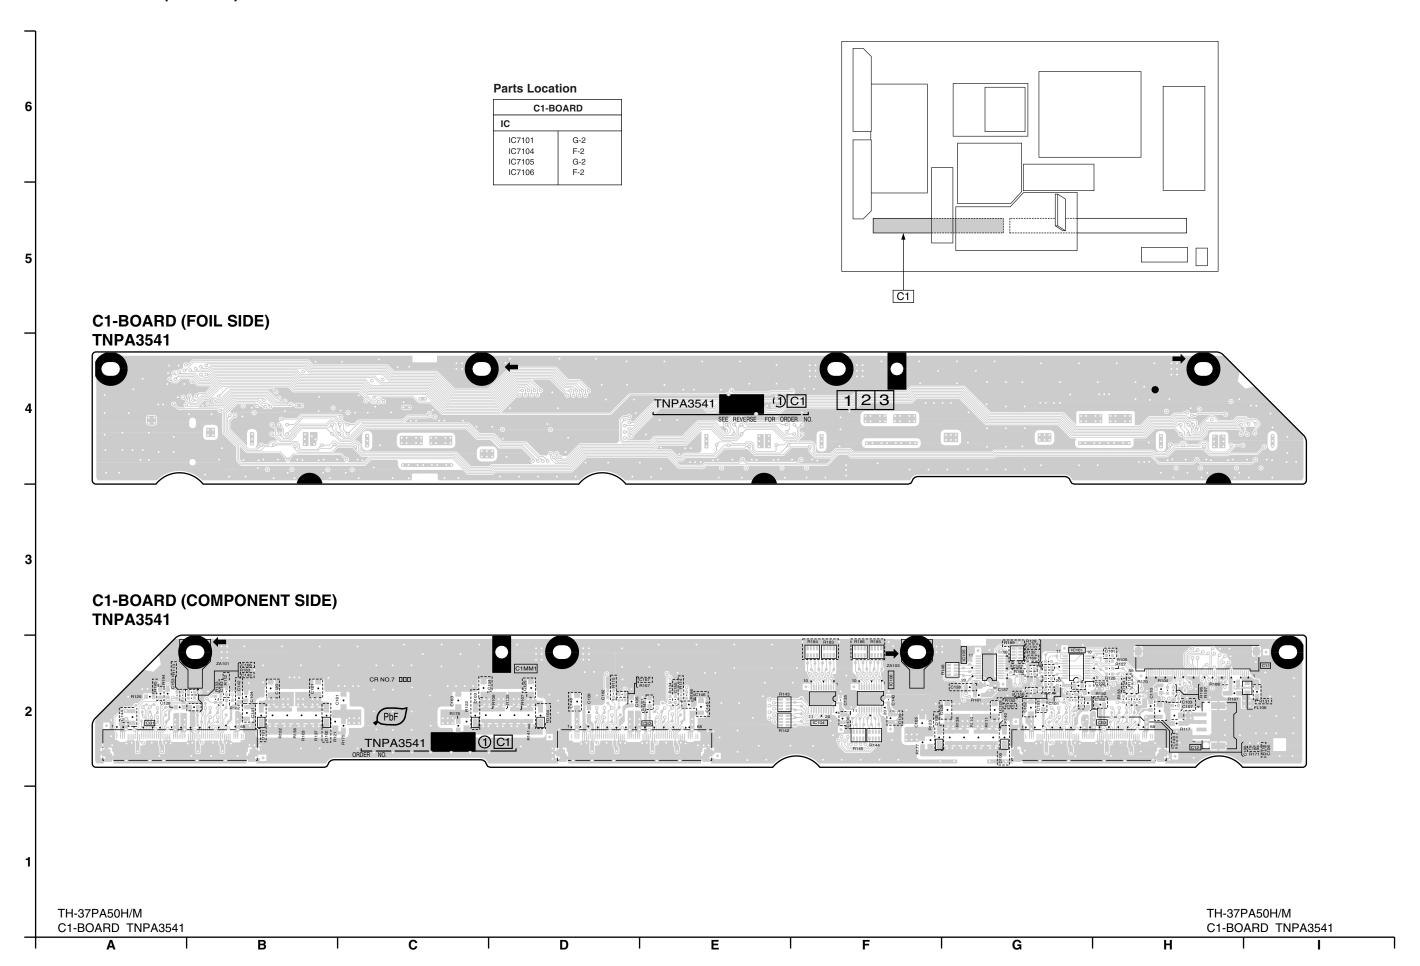


## 13.11. C1-Board (42 inch)

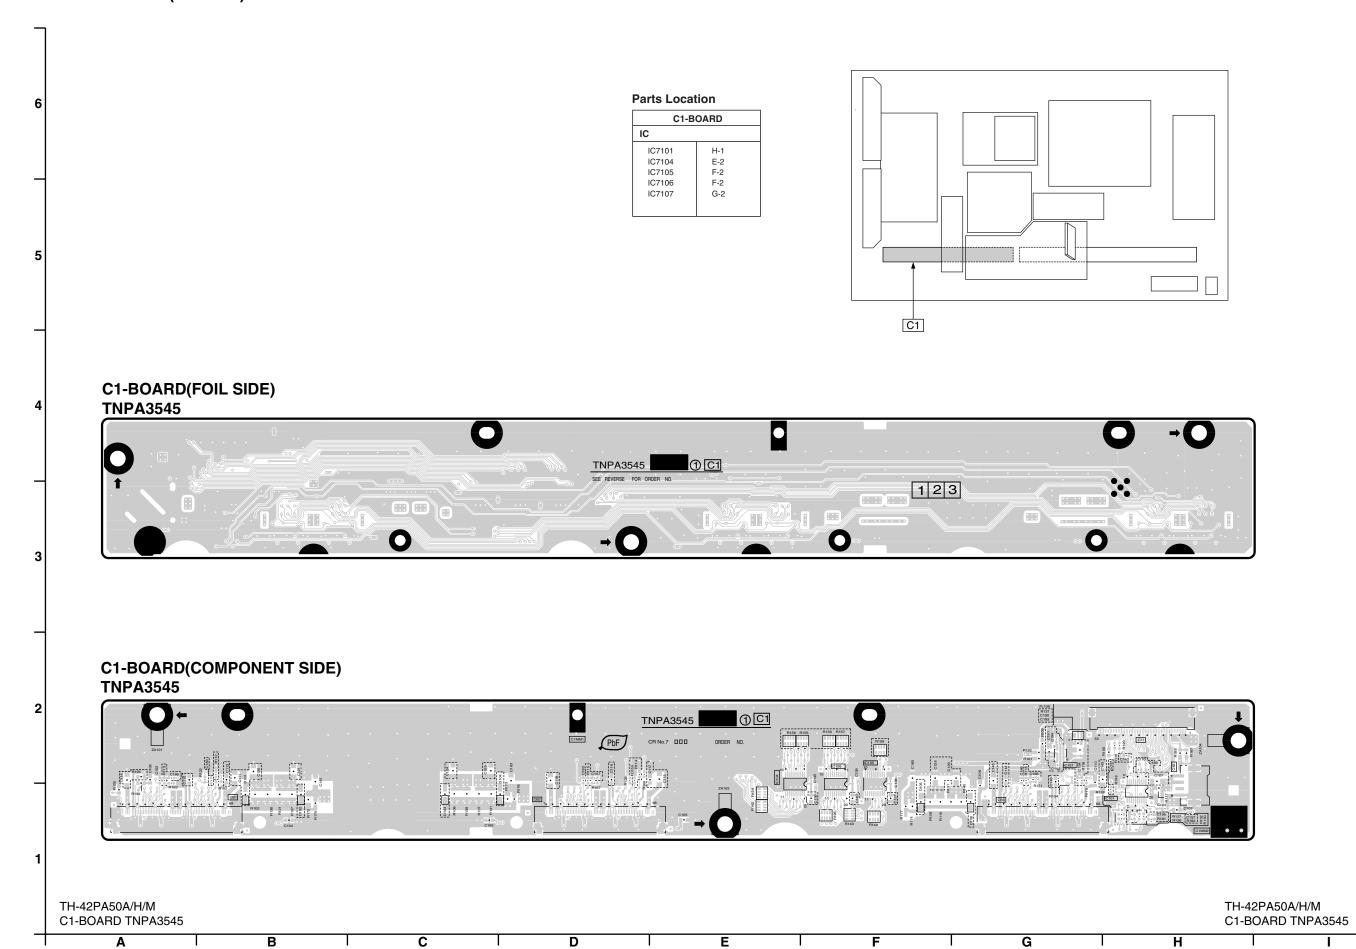

## 13.12. C2-Board (37 inch)

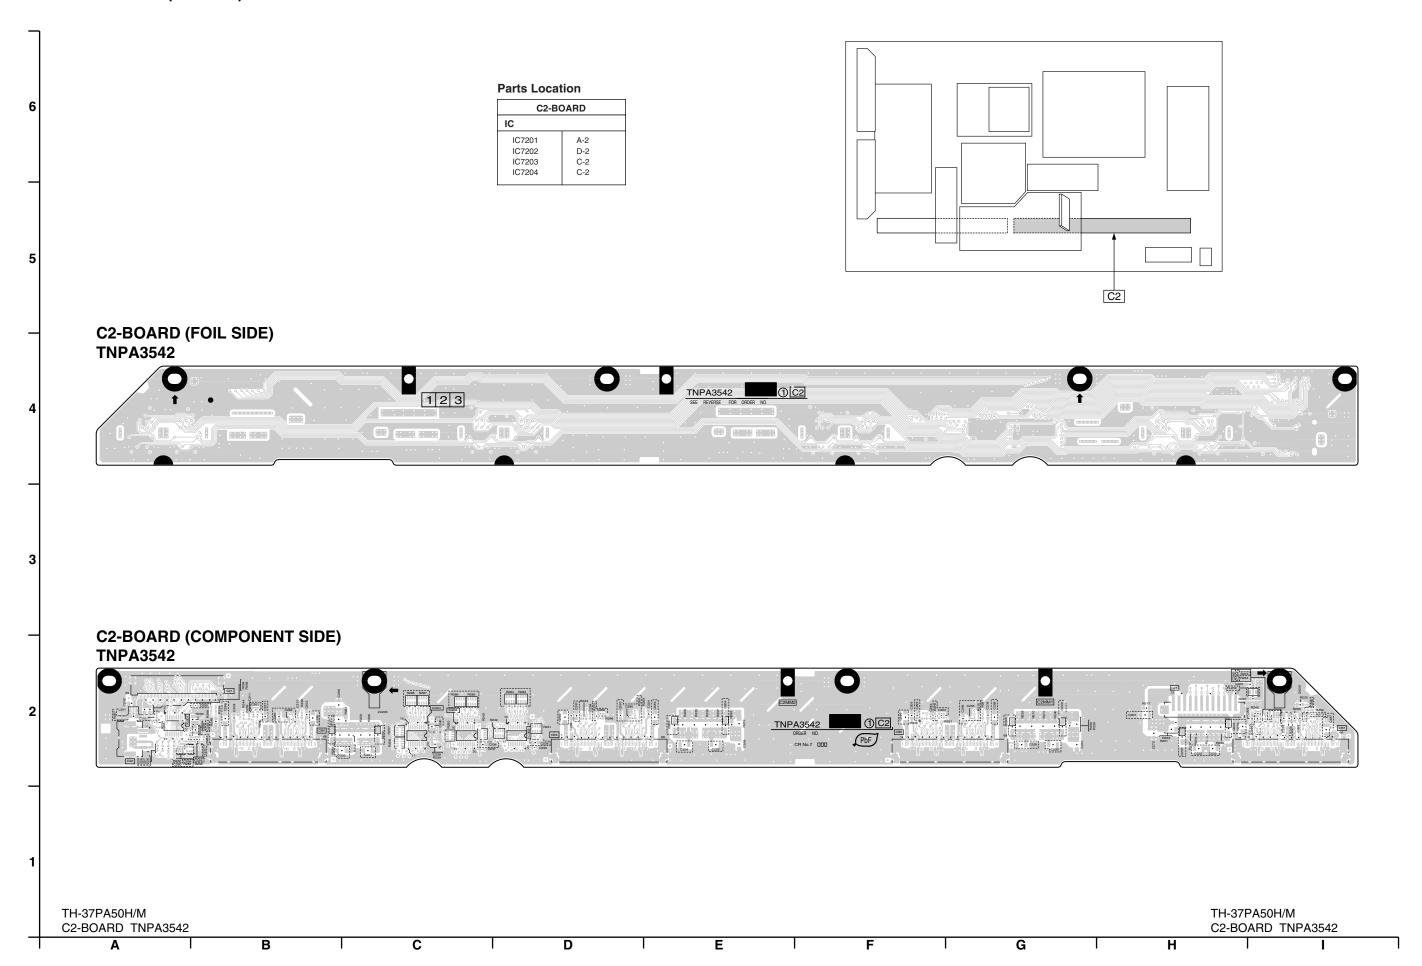


## 13.13. C2-Board (42 inch)

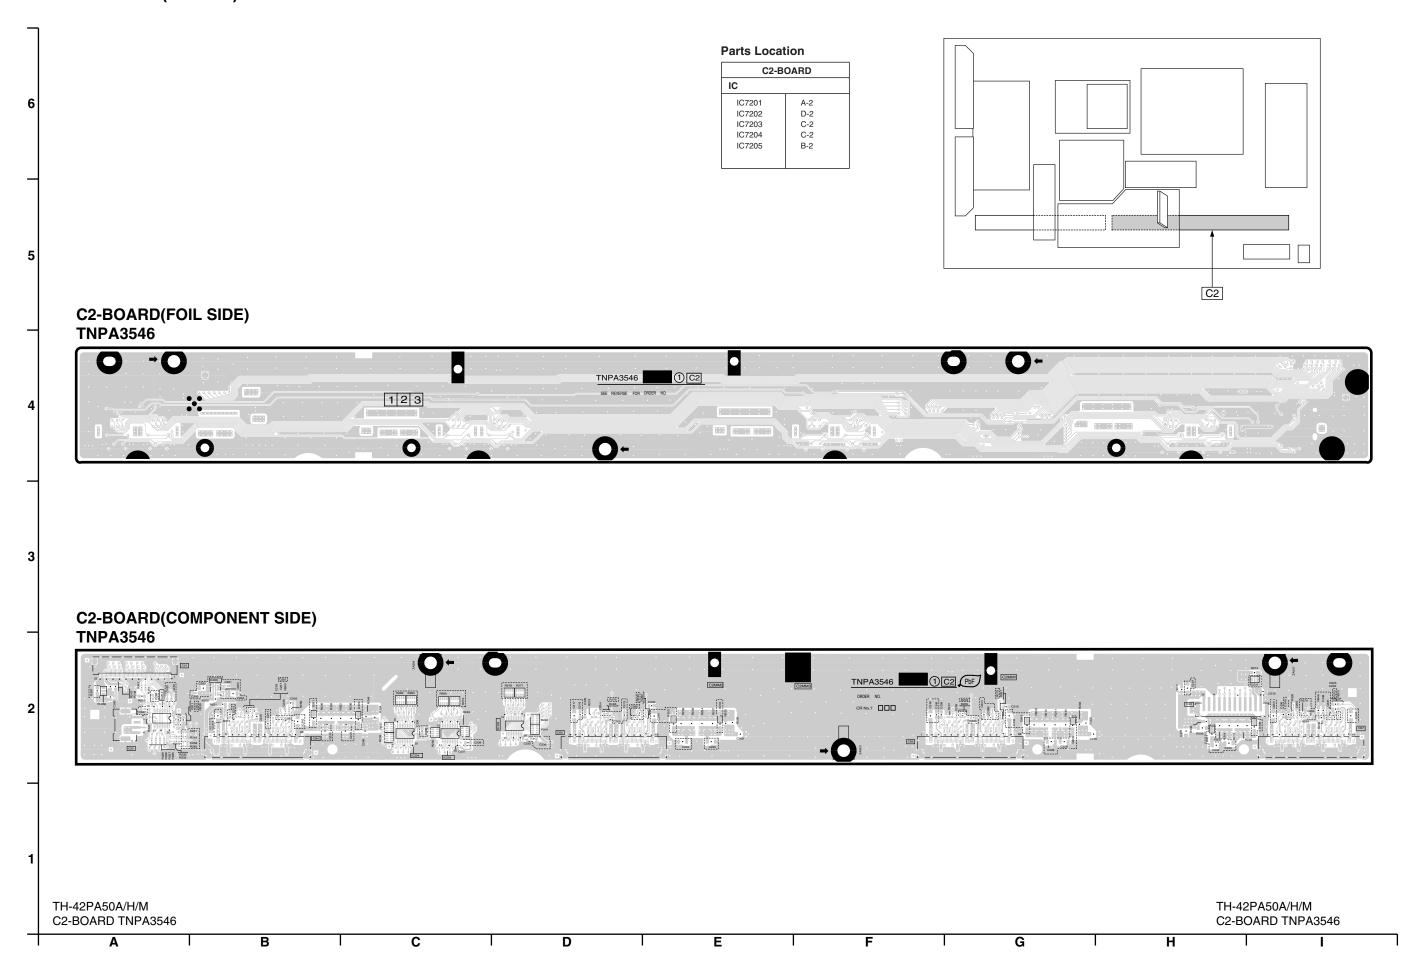

### 13.14. SC-Board

SC-BOARD(FOIL SIDE) TNPA3543AB (37inch) **TNPA3543 (42inch)** TP41 TP42 1 2 3 4 5 6 CRNo.6□□□ TP31 TP31 TH-37PA50H/M SC-BOARD TNPA3543AB TH-37PA50H/M SC-BOARD TNPA3543AB TH-42PA50A/H/M SC-BOARD TNPA3543 TH-42PA50A/H/M SC-BOARD TNPA3543 С

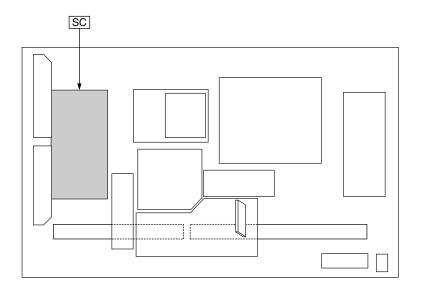

#### **Parts Location**

SC-BOARD (FOIL SIDE)							
TRANSISTOR TP			TP6032	E-1			
Q6451 Q6454 Q6491 Q6492 Q6552 Q6601 Q6602 Q6603 Q6606 Q6607 Q6608 Q6621 Q6624	H-2 H-3 A-4 A-4 G-3 C-3 B-3 D-3 C-3 C-3 F-3 F-3	TP6001 TP6002 TP6004 TP6005 TP6006 TP6007 TP6008 TP6009 TP6010 TP6011 TP6012 TP6013 TP6014 TP6015 TP6016 TP6017 TP6018 TP6019 TP6020 TP6021 TP6022 TP6023 TP6024 TP6025 TP6026 TP6027 TP6028 TP6029 TP6029 TP6030 TP6031	B-1 B-1 B-1 C-1 C-1 C-1 C-1 C-1 D-1 D-1 C-1 C-1 C-1 C-1 C-1 C-1 C-1 C-1 C-1 C	TP6033 TP6034 TP6035 TP6038 TP6039 TP6040 TP6041 TP6042 TP6043 TP6044 TP6045 TP6046 TP6047 TP6048 TP6049 TP6050 TP6051 TP6052 TP6053 TP6054 TP6055 TP6056 TP6057 TP6058 TP6056 TP6057 TP6058 TP6059 TP6060 TP6061 TP6062 TP6062 TP6063 TP6064	D-1 B-1 B-1 C-1 C-5 C-5 C-5 C-5 C-5 G-5 G-5 G-5 G-5 G-5 G-5 G-5 G-5 G-5 G		


#### **Parts Location**

		5	C-BOARD (CO	MPONENT SID	E)		
IC		TRANSISTO		Q6541	C-4	TP	
IC6451 IC6452 IC6453 IC6454 IC6455 IC6456 IC6471 IC66472 IC66491 IC6502 IC6511 IC6502 IC6511 IC6512 IC6521 IC6541 IC6542 IC6543 IC6581 IC6601 IC6602 IC6605 IC6606 IC6607	B-2 B-3 B-4 B-4 B-5 B-2 A-2 B-3 H-4 A-4 B-4 H-3 G-4 C-3 A-3 D-1 G-2 C-2 E-2 E-1	Q6451 Q6454 Q6461 Q6462 Q6463 Q6471 Q6472 Q6474 Q6476 Q6477 Q6491 Q6502 Q6501 Q6502 Q6503 Q6504 Q6505 Q6511 Q6512 Q6520 Q6521 Q6522 Q6523 Q6524 Q6525 Q6525 Q6524 Q6525 Q6526 Q6527 Q6528	A-2 B-3 C-1 B-1 C-1 B-1 A-1 A-2 B-4 B-4 H-4 H-3 B-3 B-3 B-3 B-3 B-4 G-4 C-4 D-3 D-3 E-3 E-3 E-3 F-3 F-3 G-4	Q6542 Q6543 Q6544 Q6545 Q6546 Q6547 Q6548 Q6549 Q6551 Q6552 Q6553 Q6554 Q6555 Q6581 Q6582 Q6583 Q6584 Q6601 Q6602 Q6603 Q6606 Q6607 Q6608 Q6611 Q6612 Q6613 Q6614 Q6621 Q6624	D-4 D-4 D-4 D-4 E-4 E-4 F-4 F-4 G-4 C-3 C-3 C-3 D-1 H-5 E-2 G-3 G-3 H-3 E-3 F-3 F-3 F-3 F-3 F-3 C-2 D-3 C-2 D-3 C-3	TPSC1 TPV15V TPVAD TPVSCN TPVSET TPVSUS	C-5 F-1 B-3 A-3 G-5 G-1


TH-42PA50A/H/M, TH-37PA50H/M SC-BOARD PARTS LOCATION TH-42PA50A/H/M, TH-37PA50H/M SC-BOARD PARTS LOCATION

SC-BOARD(COMPONENT SIDE) TNPA3543AB (37inch) TNPA3543 (42inch) TH-37PA50H/M SC-BOARD TNPA3543AB TH-42PA50A/H/M SC-BOARD TNPA3543 TH-37PA50H/M SC-BOARD TNPA3543AB TH-42PA50A/H/M SC-BOARD TNPA3543 С


## 13.15. SU-Board (37 inch)

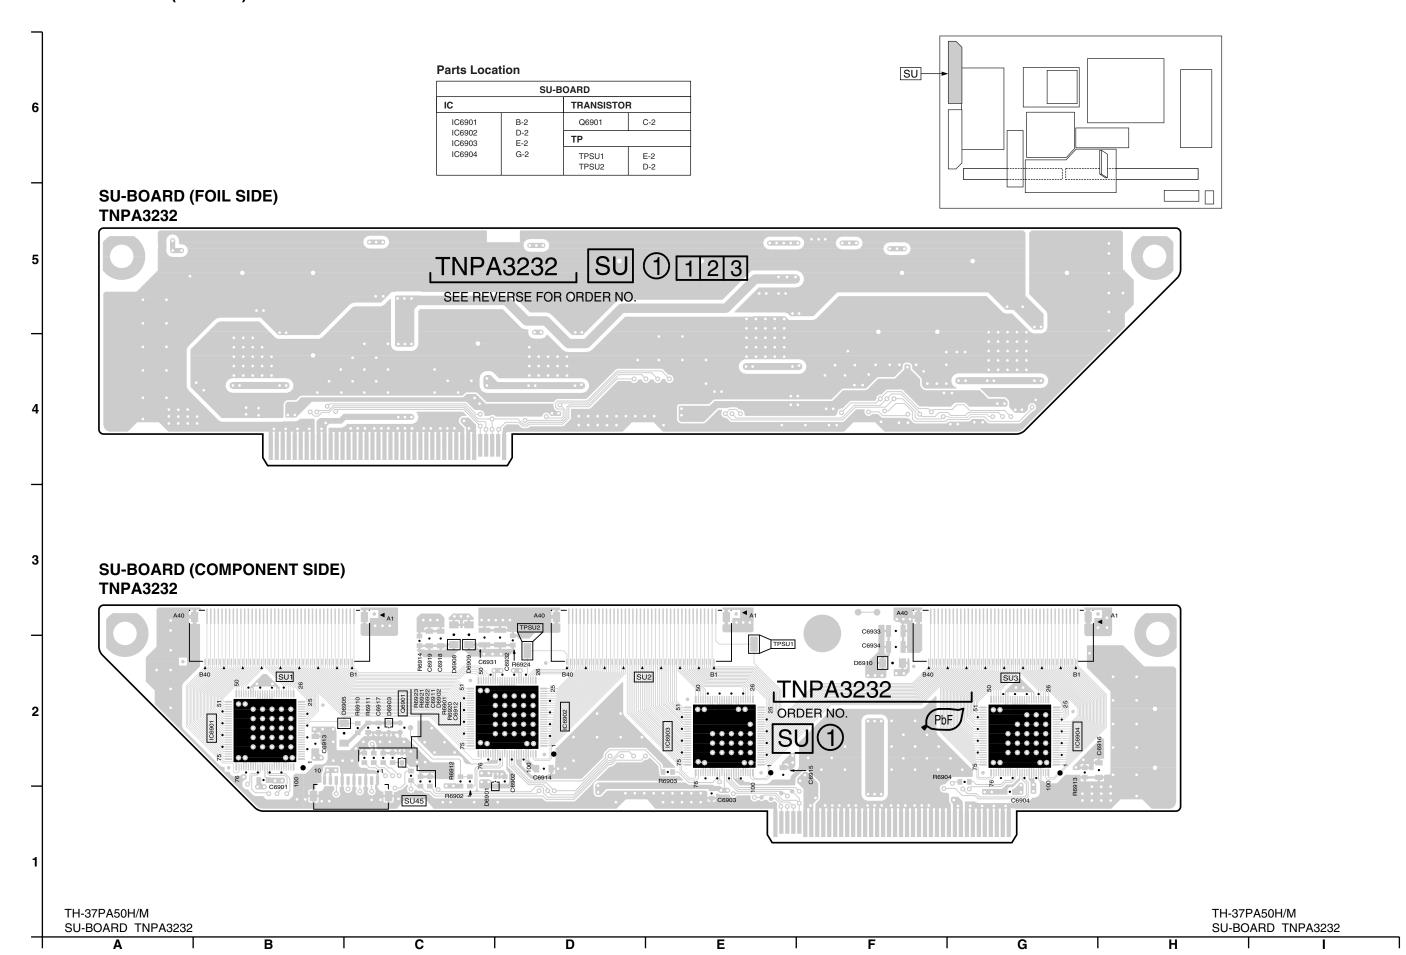


## 13.16. SU-Board (42 inch)

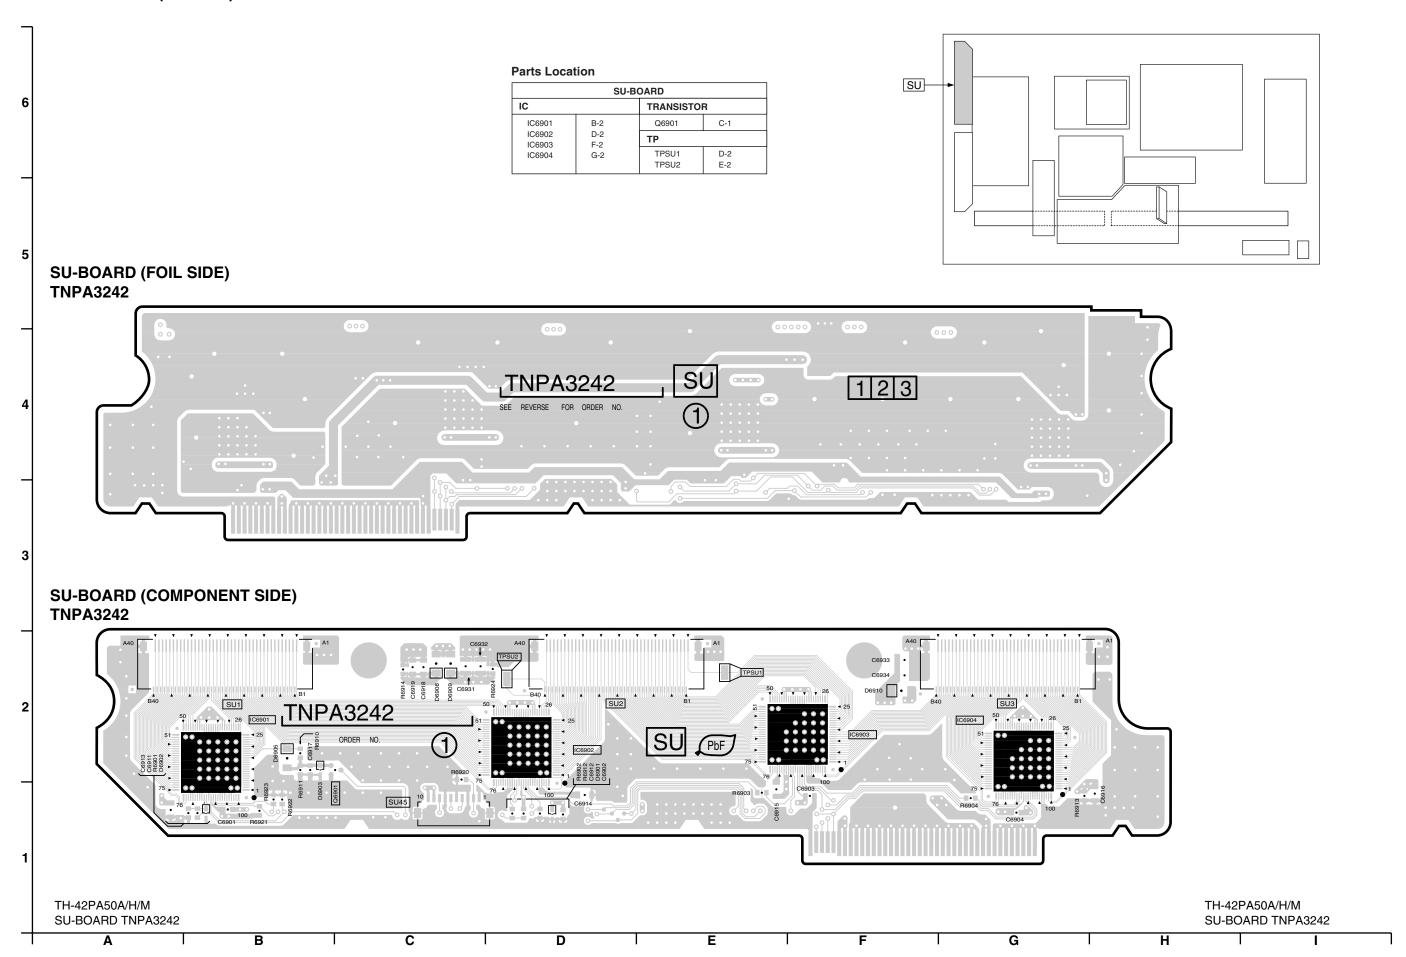


## 13.17. SD-Board (37 inch)

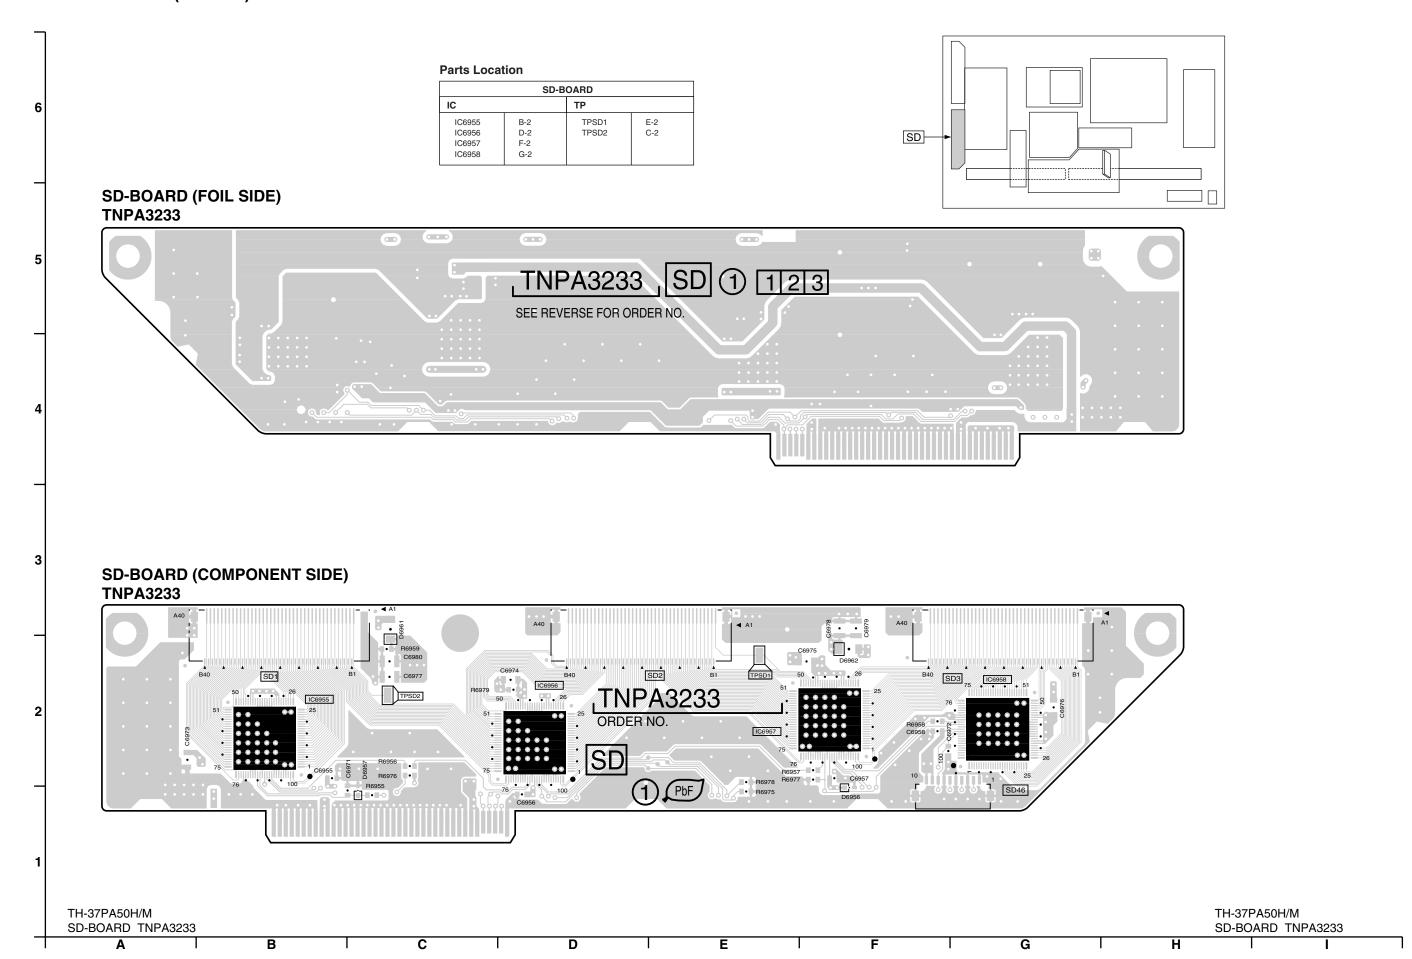


## 13.18. SD-Board (42 inch)

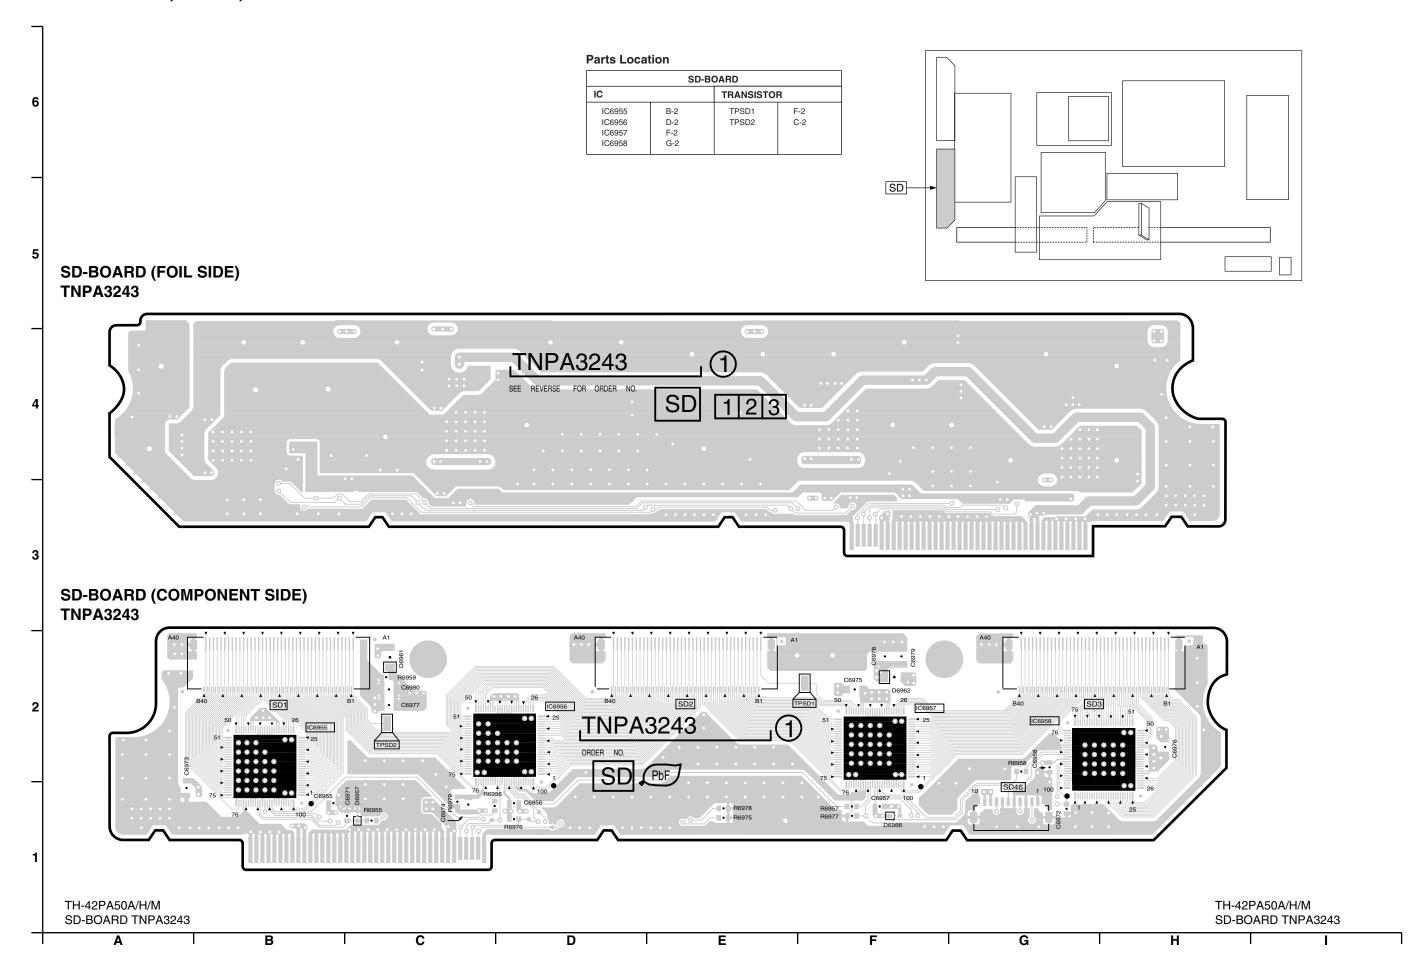


#### 13.19. SS-Board

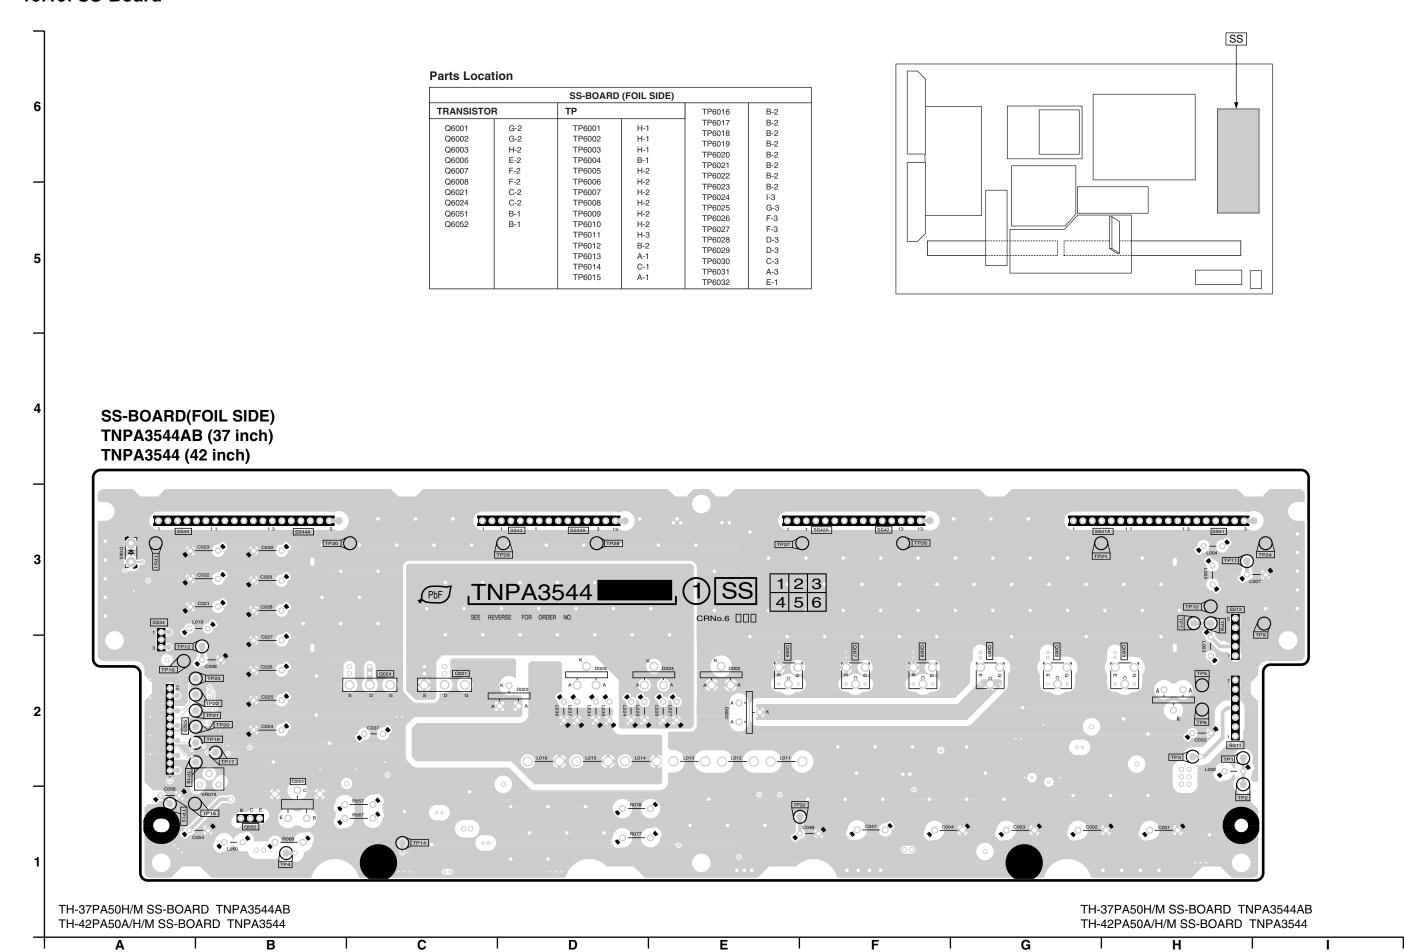

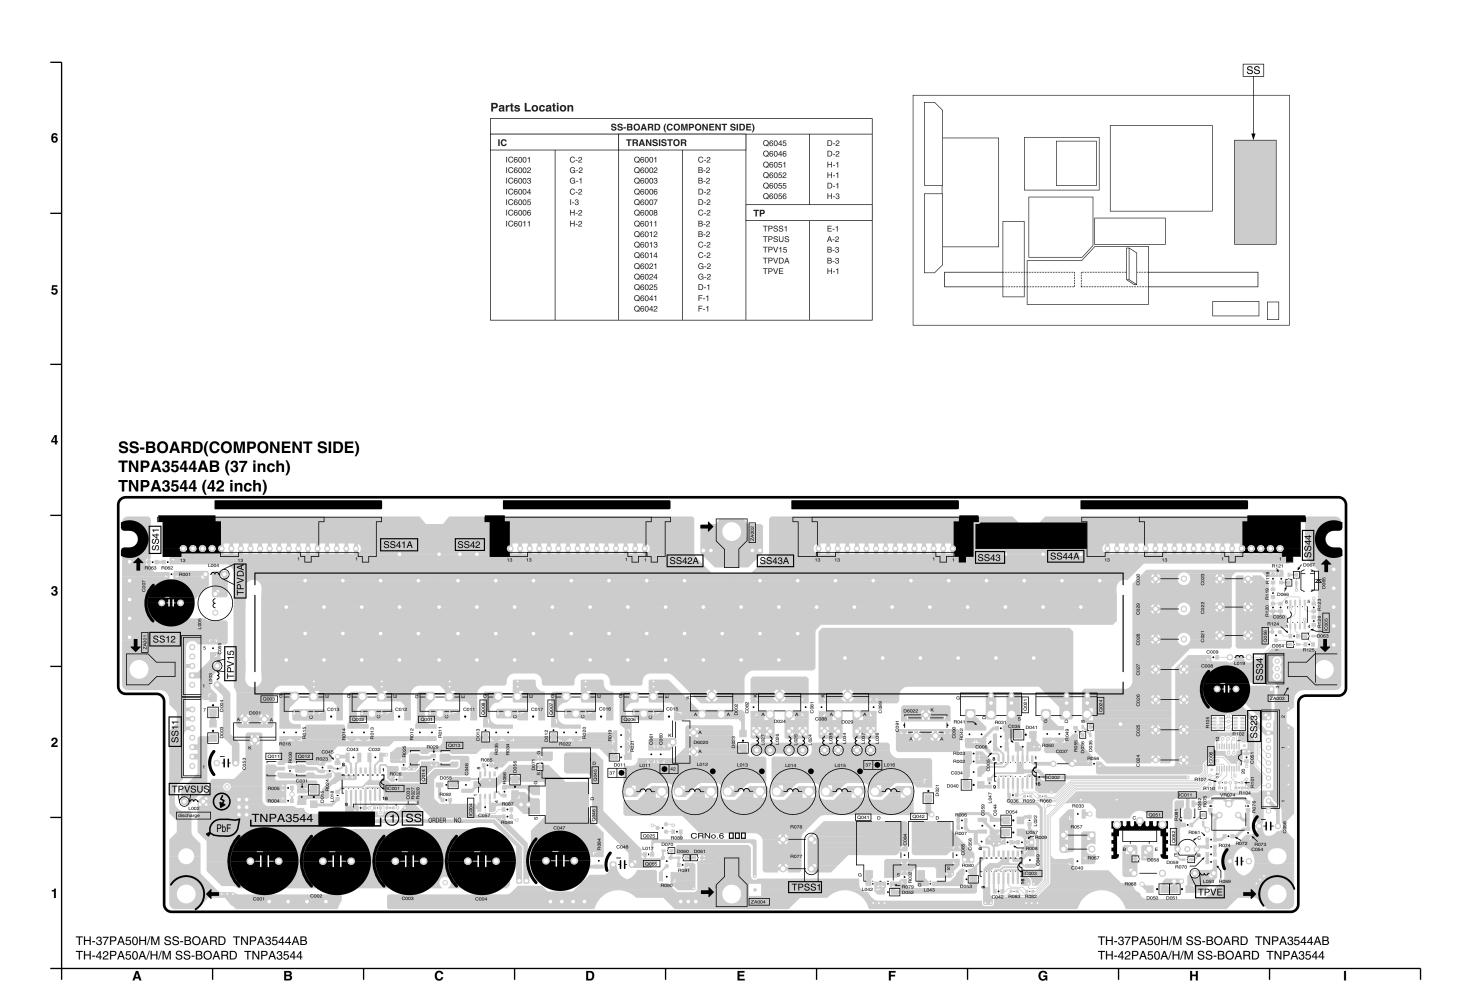

### 13.20. K and S-Board

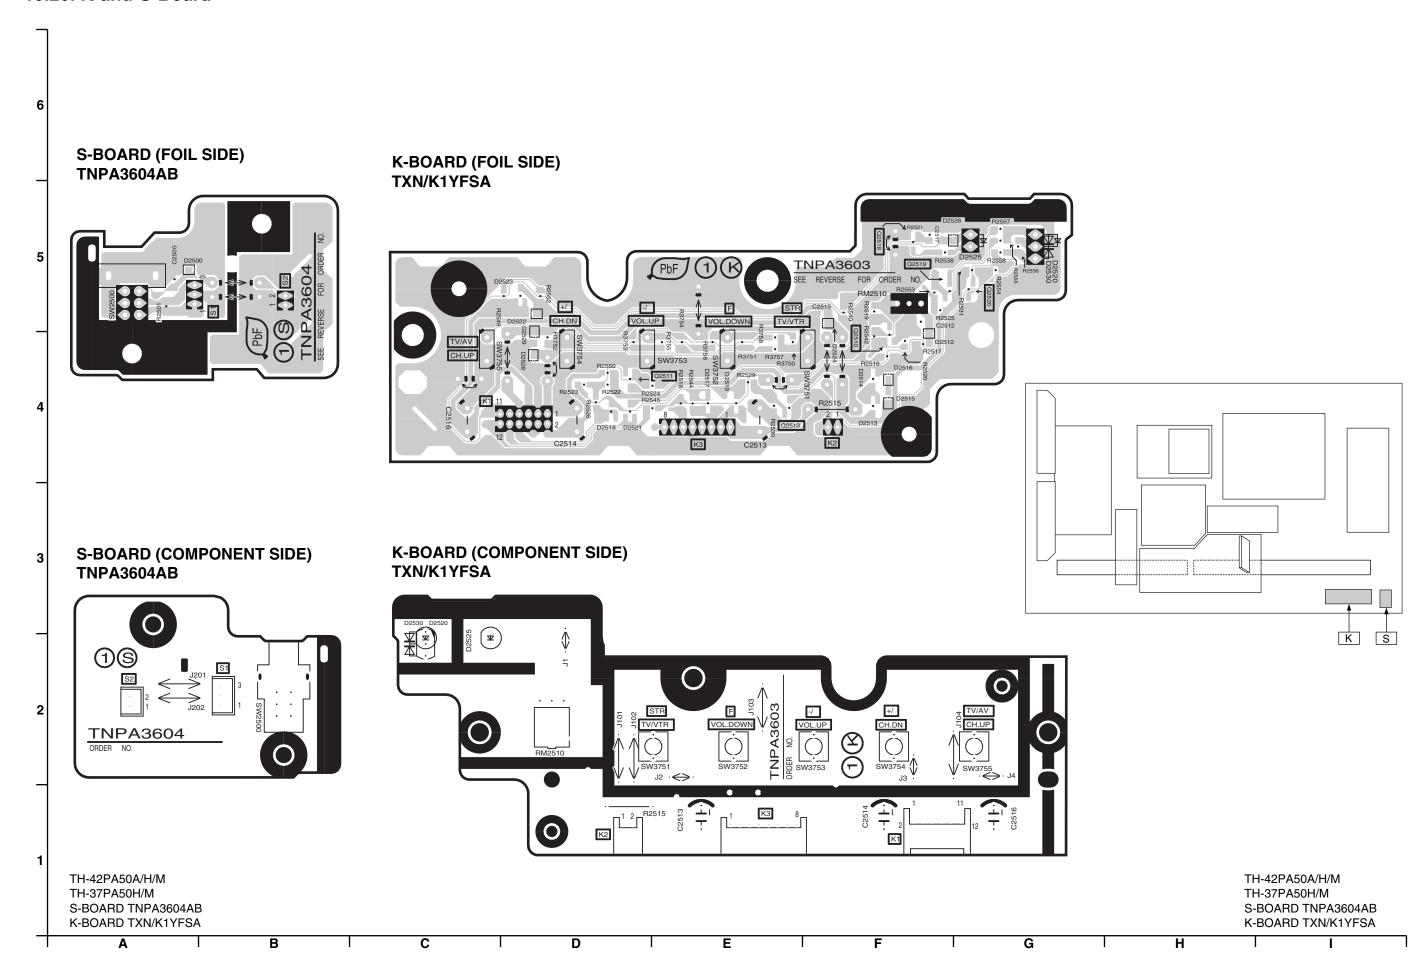

TH-42PA50A / TH-42PA50H / TH-42PA50M / TH-37PA50H / TH-37PA50M

## 14 Block and Schematic Diagram

### 14.1. Schematic Diagram Notes

	-	. ~ .		
	~~~~	++-	.+ R	lotice
	6 NF 154F1	1 <b>3</b> 416	21 V/ IV	37 NI 17 - C
111111	vi taii	LOUIL	, L V I'	101166

Components identified by  $\triangle$  mark have special characteristics important for safety. When replacing any of these components, use only manufacture's specified parts.

#### Notes:

1. Resistor

Unit of resistance is OHM  $[\Omega]$  (K=1,000, M=1,000,000).

Capacitor

Unit of capacitance is µF, unless otherwise noted.

Coil

Unit of inductance is H, unless otherwise noted.

4. Test Point

○ : Test Point position

5. Earth Symbol

: Line Earth (Hot)

6. Voltage Measurement

Voltage is measured by a DC voltmeter.

Conditions of the measurement are the following:

- 7. When arrow mark ( / ) is found, connection is easily found from the direction of arrow.
- 8. Indicates the major signal flow. : Video → Audio ⇒
- 9. This schematic diagram is the latest at the time of printing and subject to change without notice.

TH-42PA50A/H/M, TH-37PA50H/M Schematic Diagram Notes

TH-42PA50A / TH-42PA50H / TH-42PA50M / TH-37PA50H / TH-37PA50M

#### Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.

The circuit is defined by HOT and COLD indications in the schematic diagram. Take the follwing precautions.


All circuits, except the Power Circuit, are cold.

Precautions

- a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
- b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
- Connect the earth of instruments to the earth connection of the circuit being measured.
- d. Make sure to disconnect the power plug before removing the chassis.

TH-42PA50A/H/M, TH-37PA50H/M Schematic Diagram Notes


## 14.2. Main Block Diagram

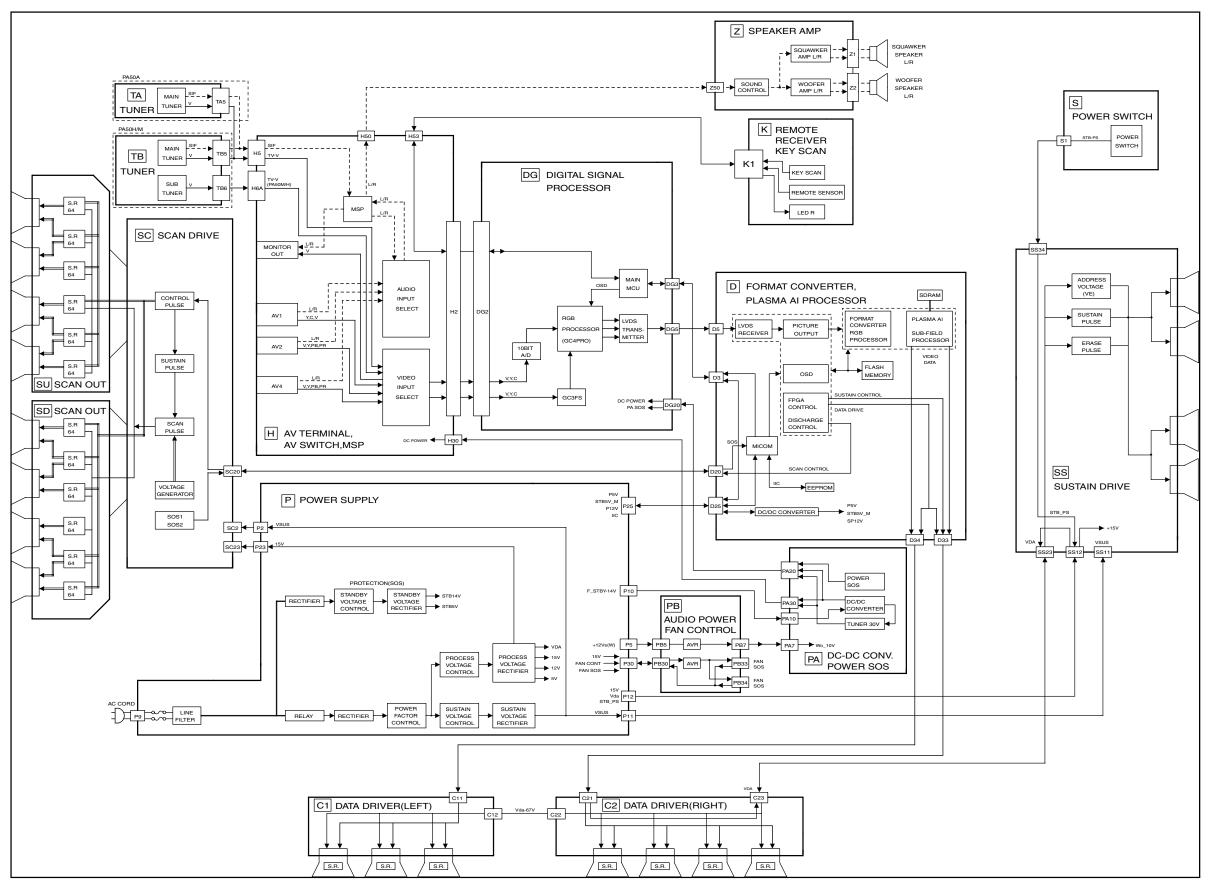

TH-42PA50A/M/H, TH-37PA50M/H Main Block Diagram


TH-42PA50A/M/H, TH-37PA50M/H Main Block Diagram

## 14.3. P-Board Block Diagram

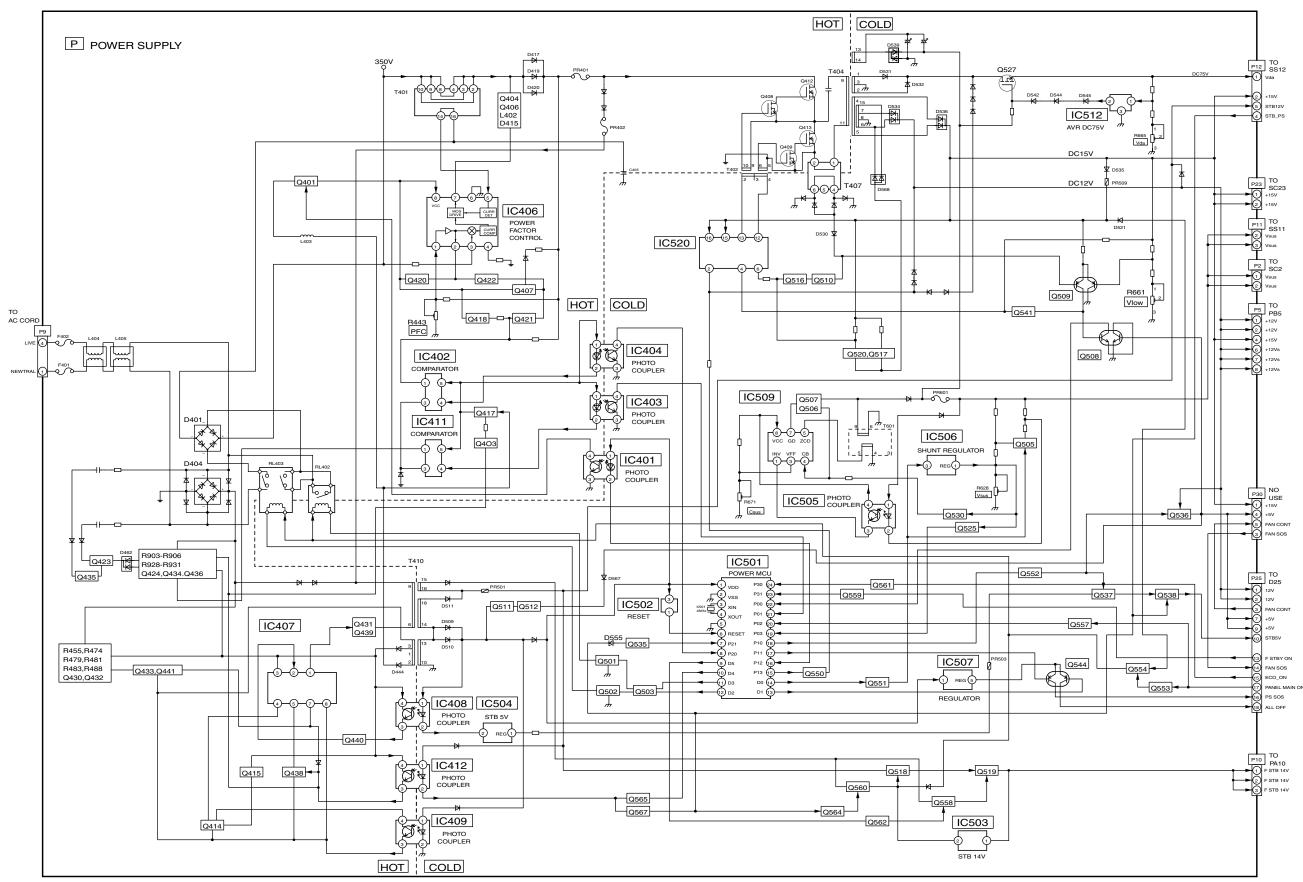


TH-42PA50A/H/M, TH-37PA50H/M P-Board Block Diagram TH-42PA50A/H/M, TH-37PA50H/M P-Board Block Diagram


# 14.4. P-Board (1 of 6) Schematic Diagram

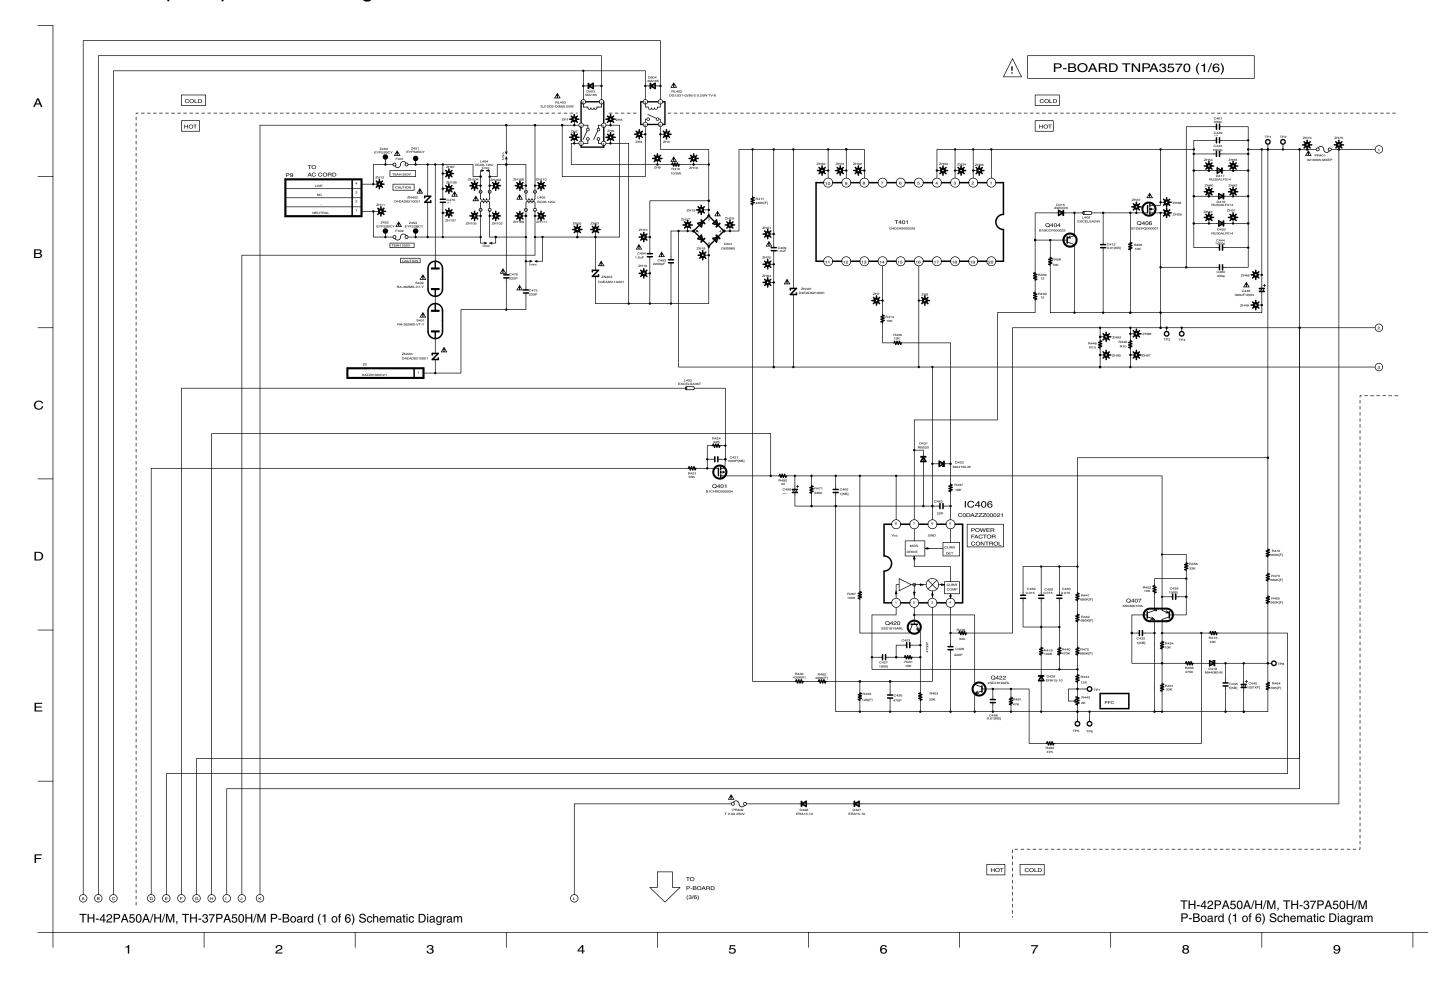


# 14.5. P-Board (2 of 6) Schematic Diagram

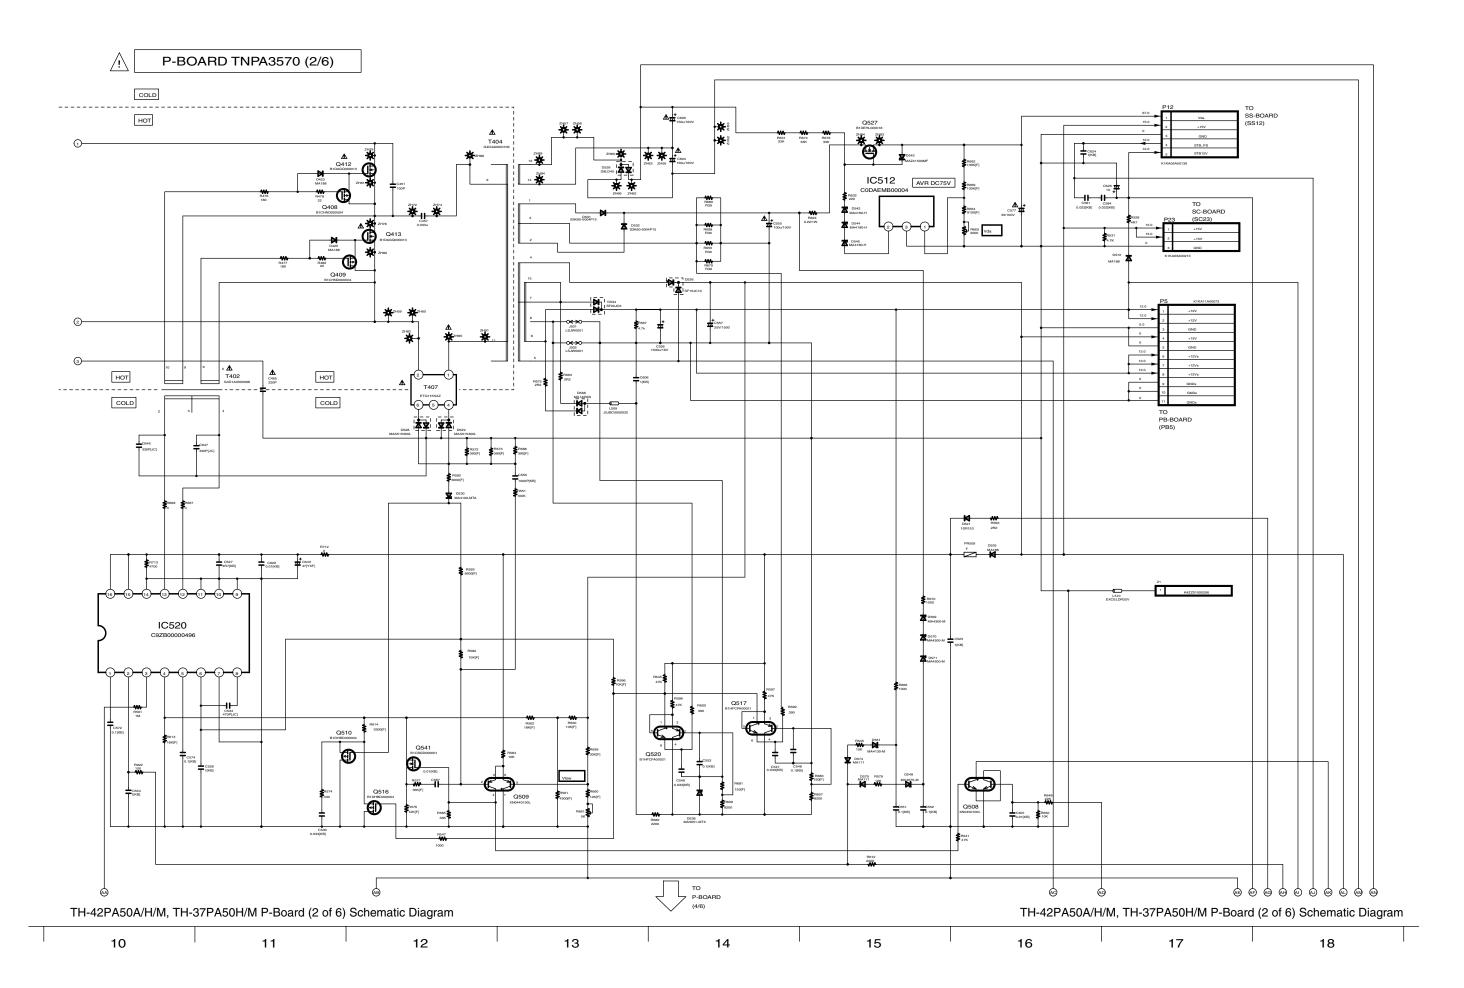


# 14.6. P-Board (3 of 6) Schematic Diagram

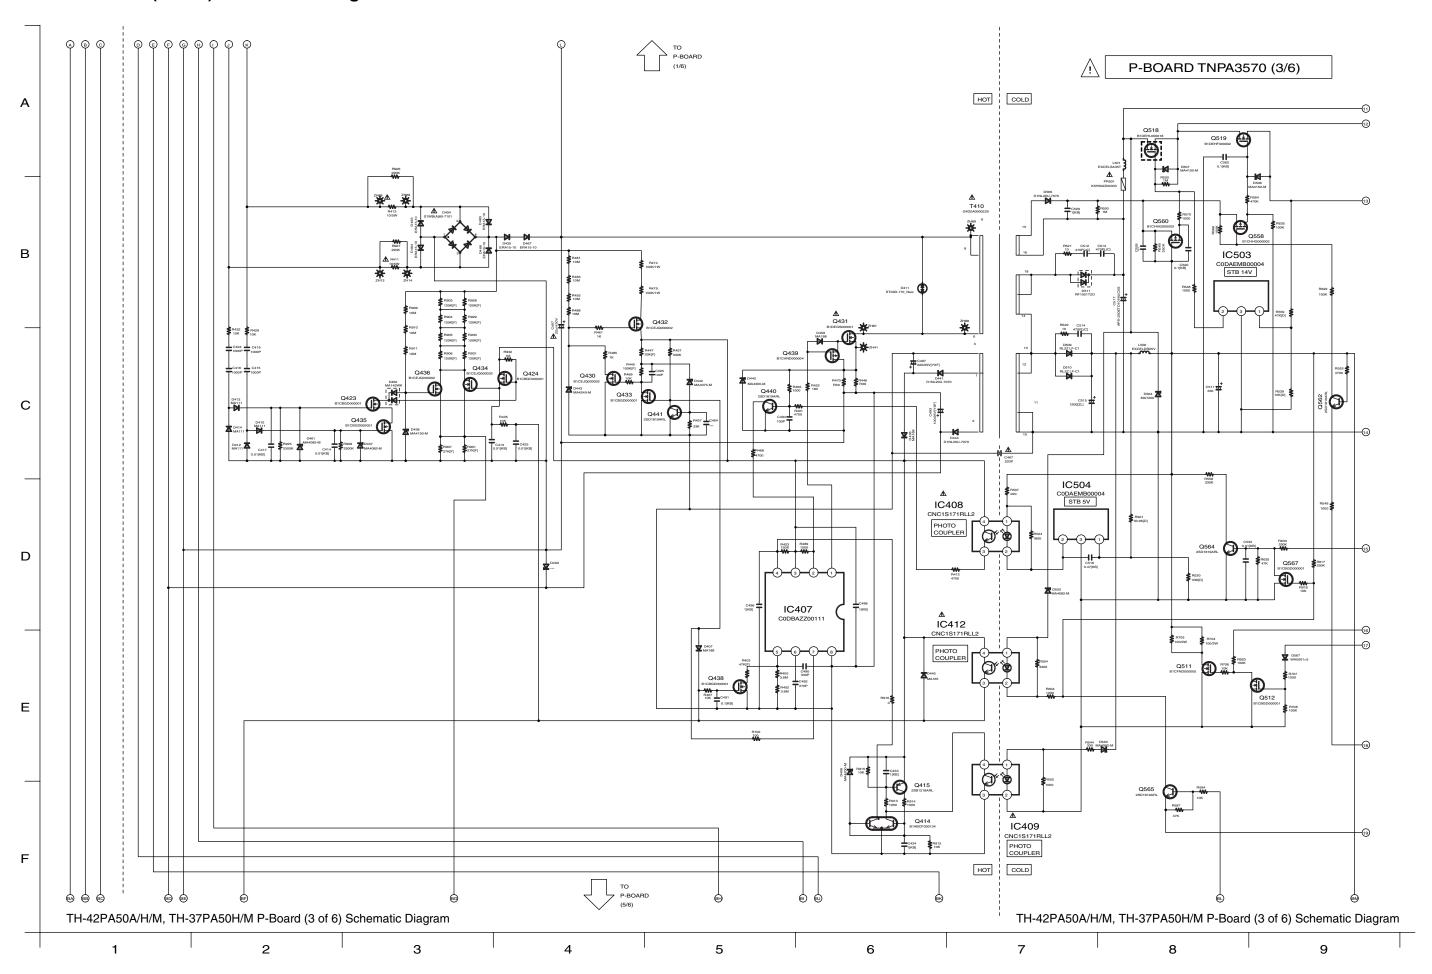


# 14.7. P-Board (4 of 6) Schematic Diagram

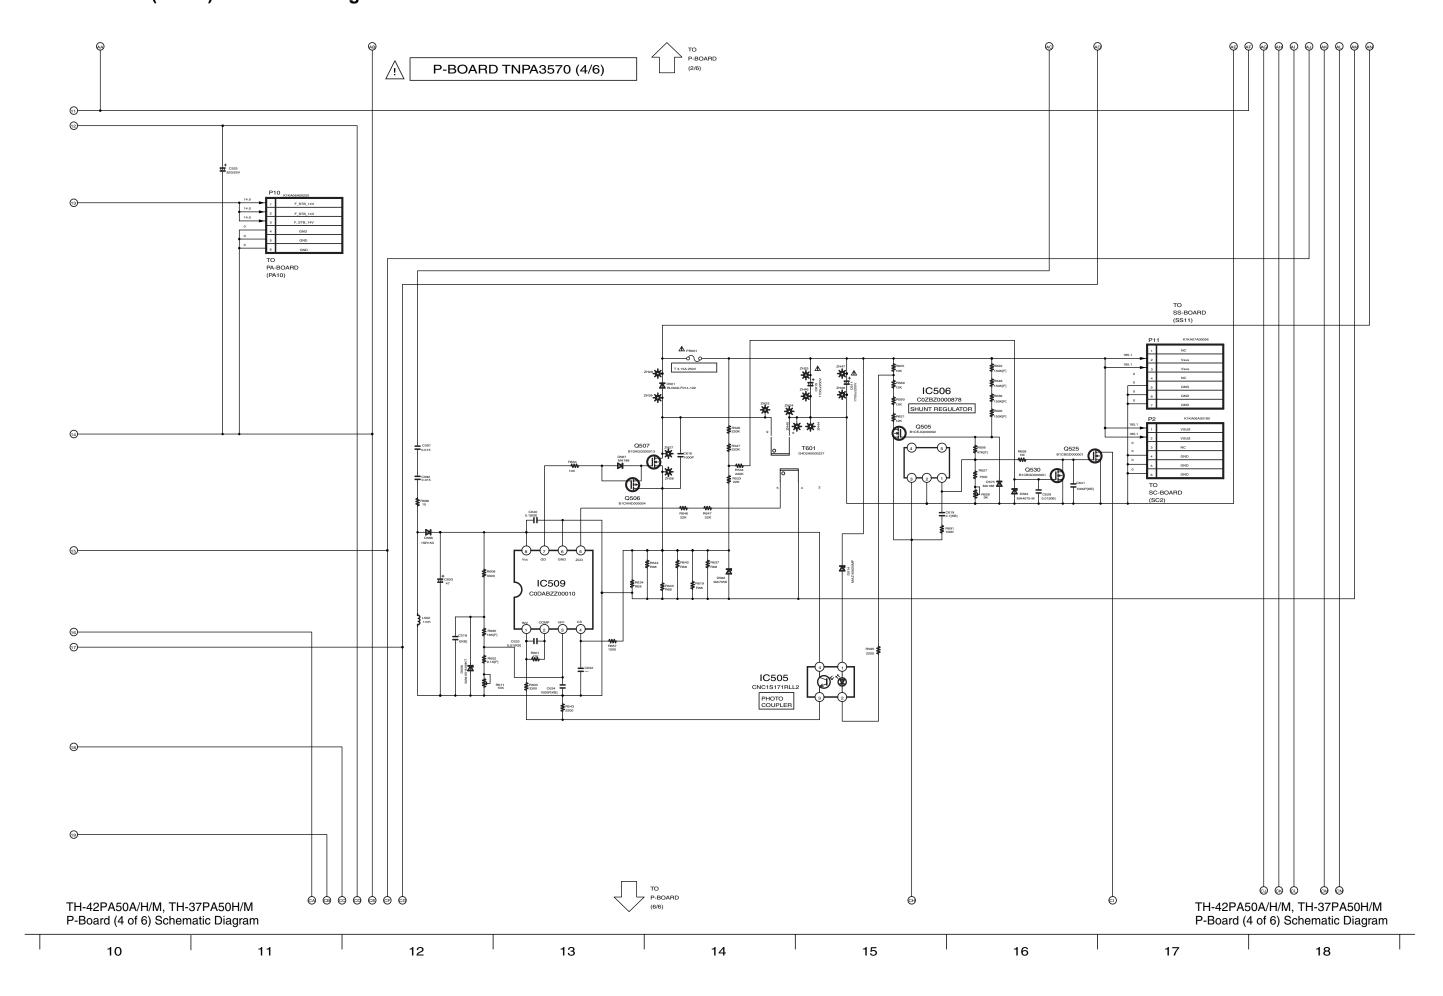


# 14.8. P-Board (5 of 6) Schematic Diagram

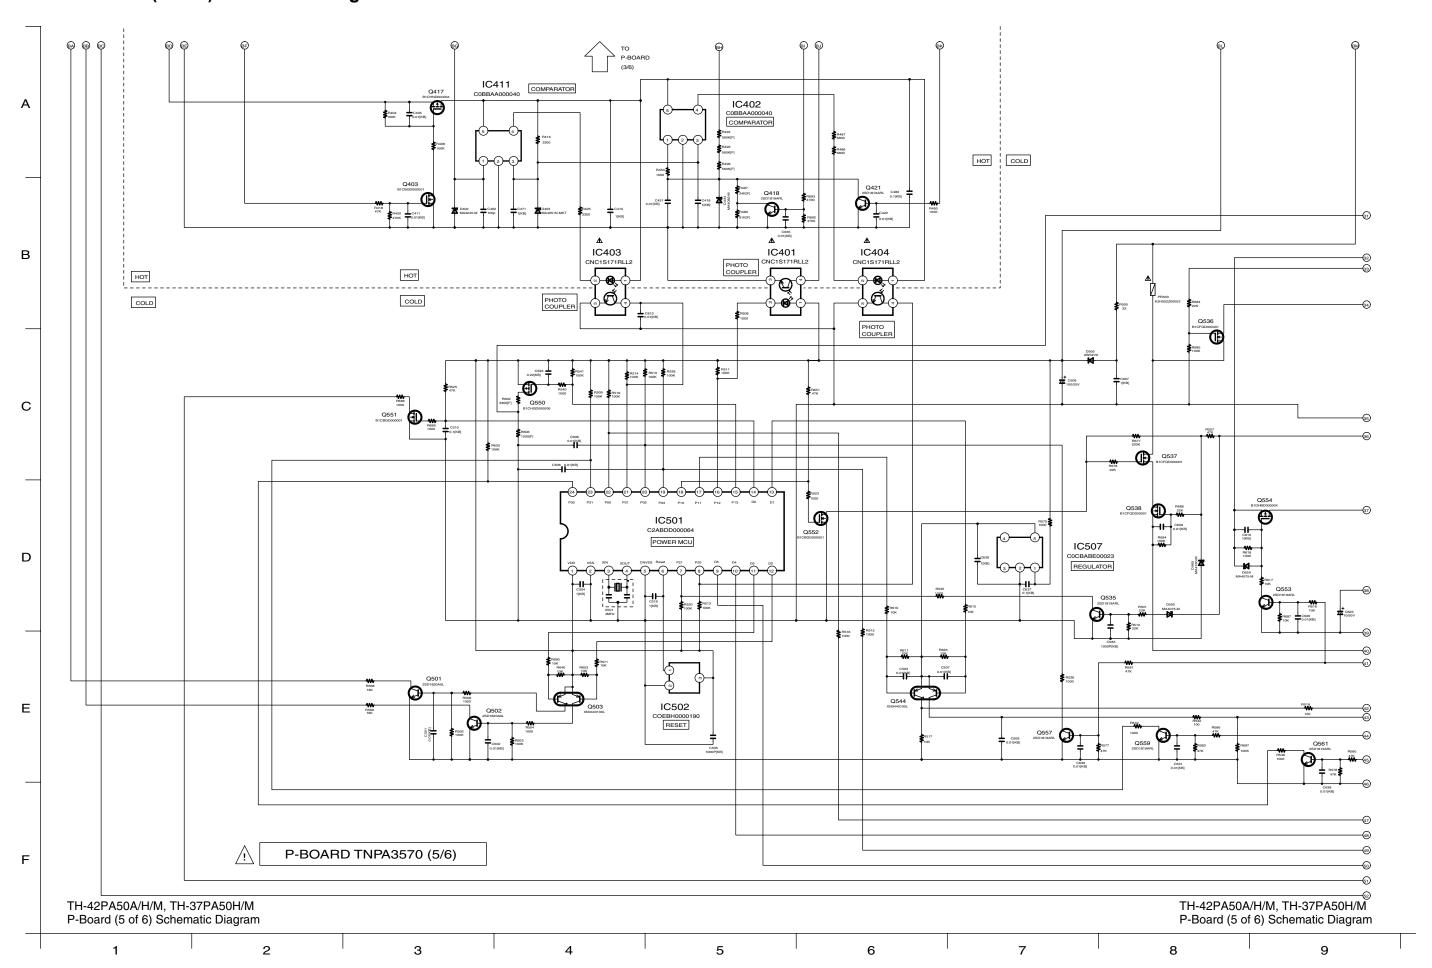

# 14.9. P-Board (6 of 6) Schematic Diagram

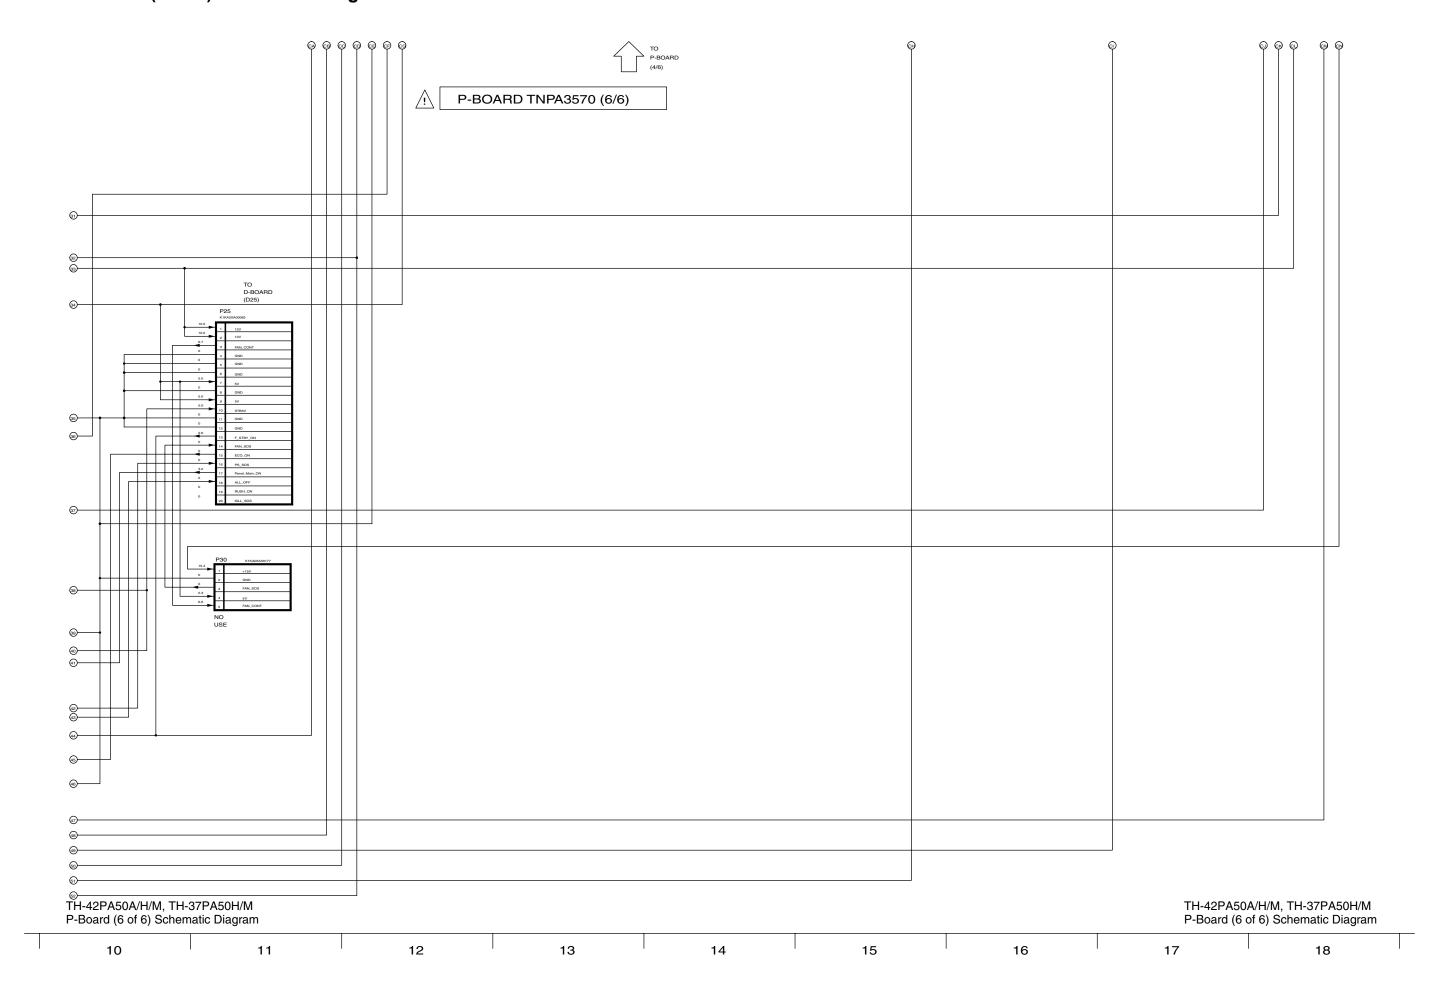


## 14.10. PA and PB-Board Block Diagram

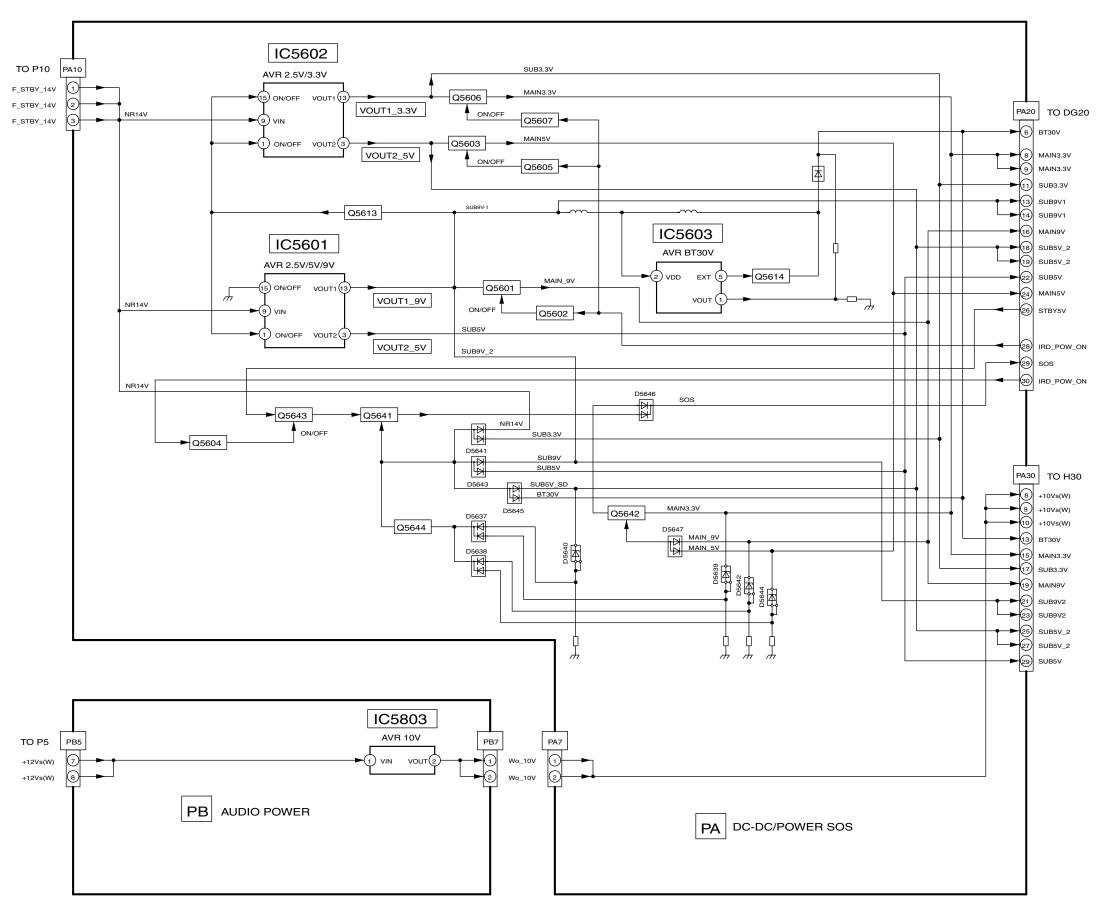


TH-42PA50A/H/M, TH-37PA50H/M PA and PB-Board Block Diagram

TH-42PA50A/H/M, TH-37PA50H/M PA and PB-Board Block Diagram


# 14.11. PA-Board Schematic Diagram

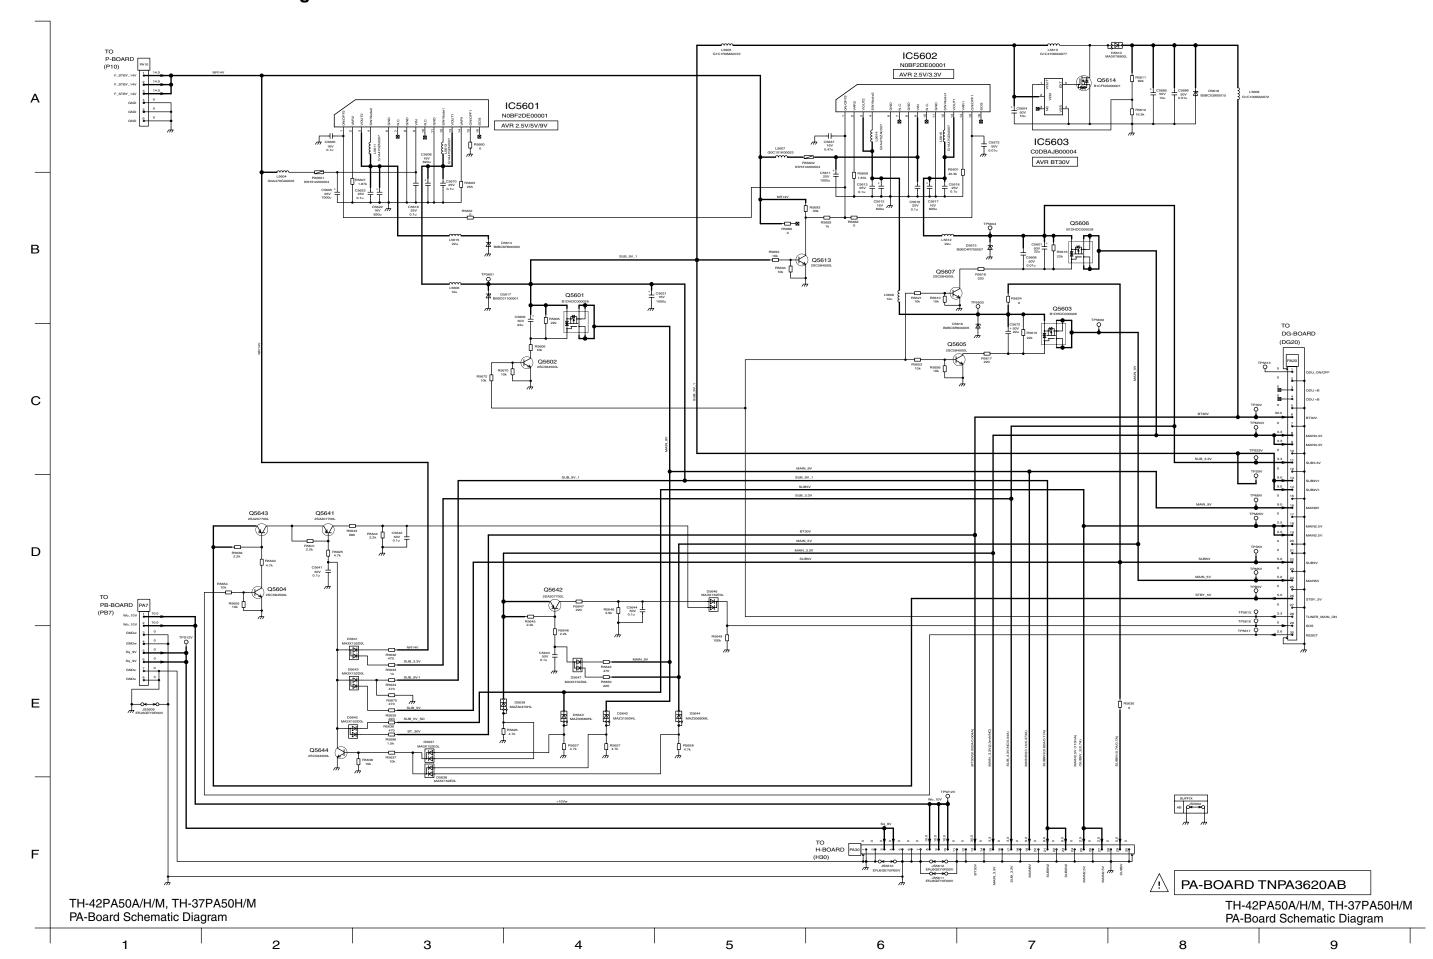

# 14.12. PB-Board Schematic Diagram

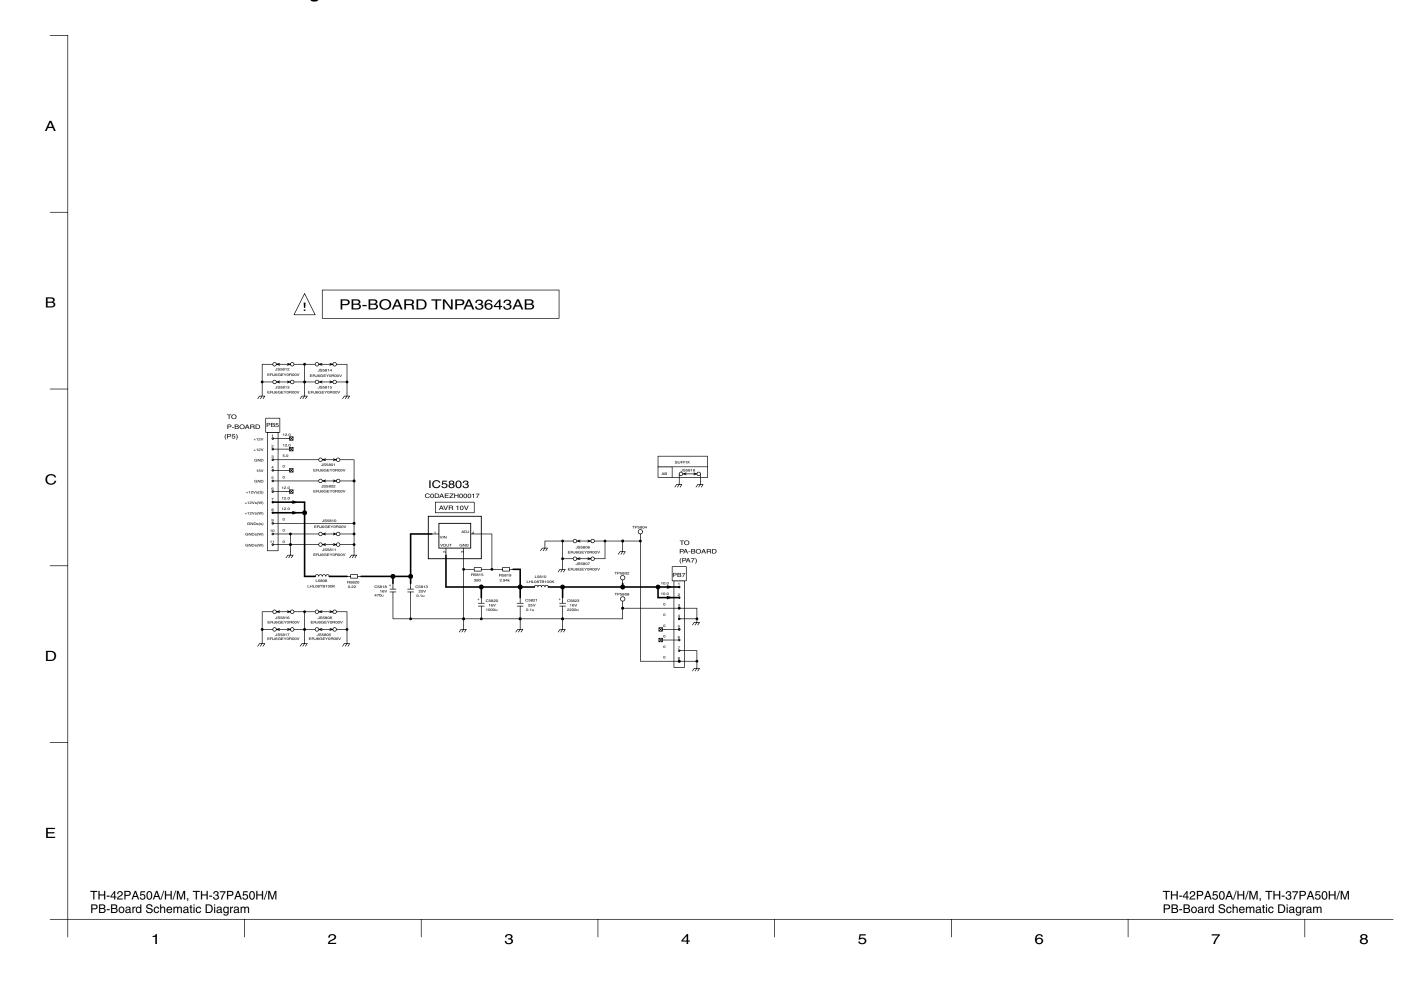


## 14.13. H, TA and TB-Board Block Diagram

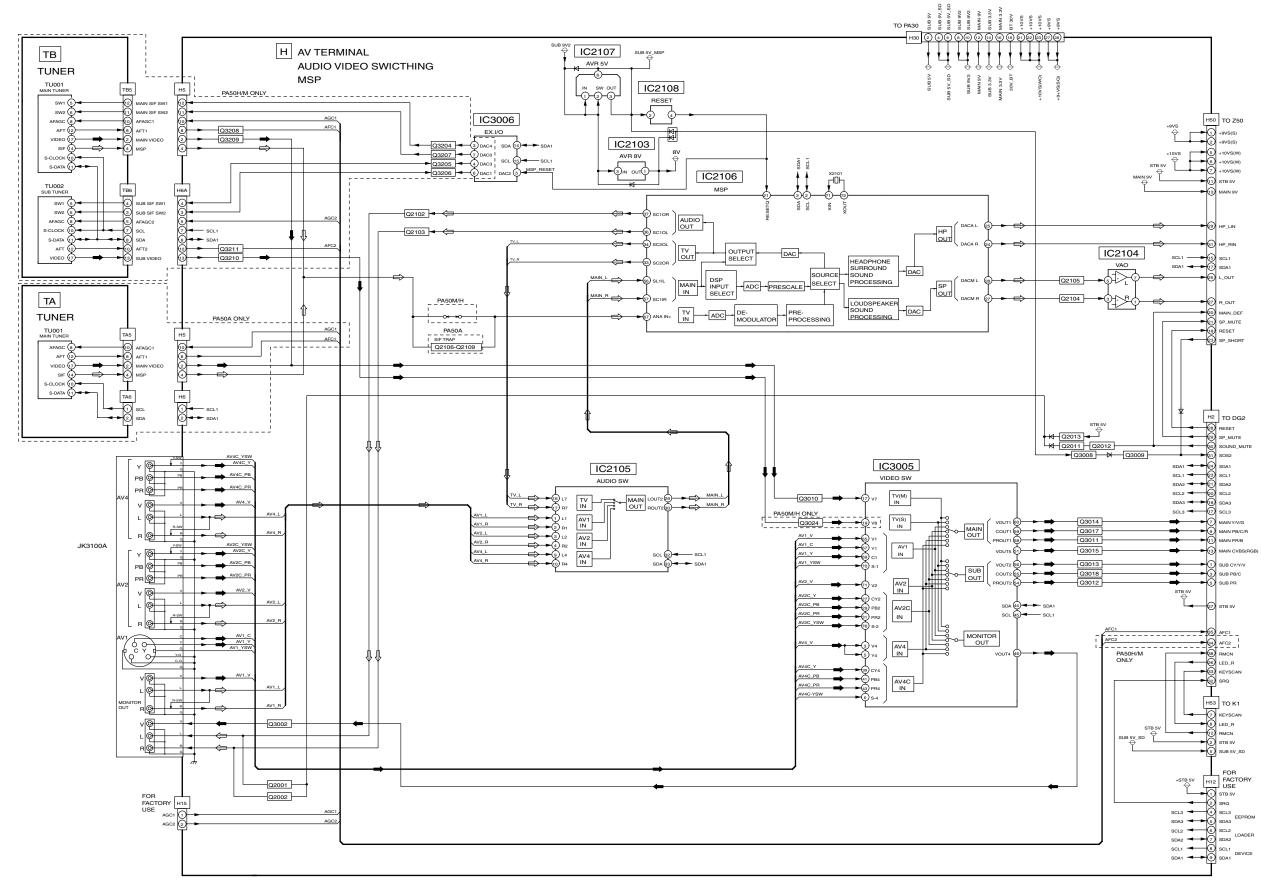


TH-42PA50A H and TA-Board Block Diagram TH-37/42PA50H/M H and TB-Board Block Diagram

TH-42PA50A H and TA-Board Block Diagram TH-37/42PA50H/M H and TB-Board Block Diagram


# 14.14. K, S and Z-Board Block Diagram

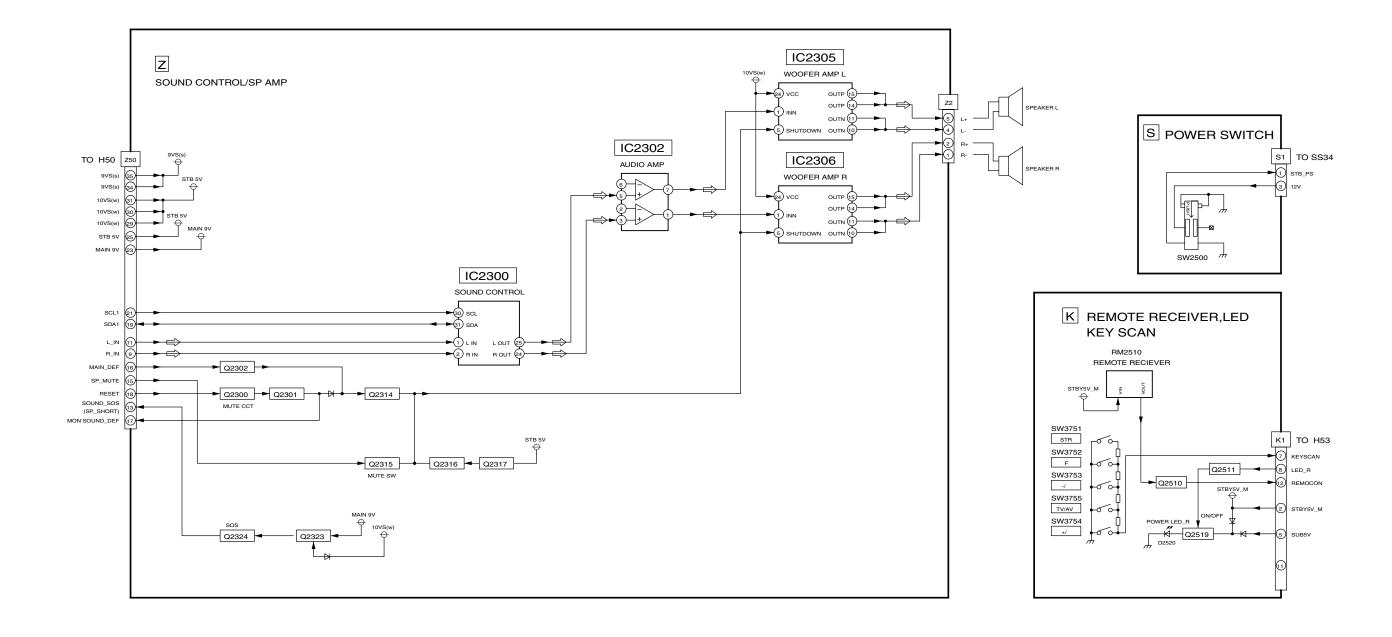


# 14.15. H Board (1 of 3) Schematic Diagram

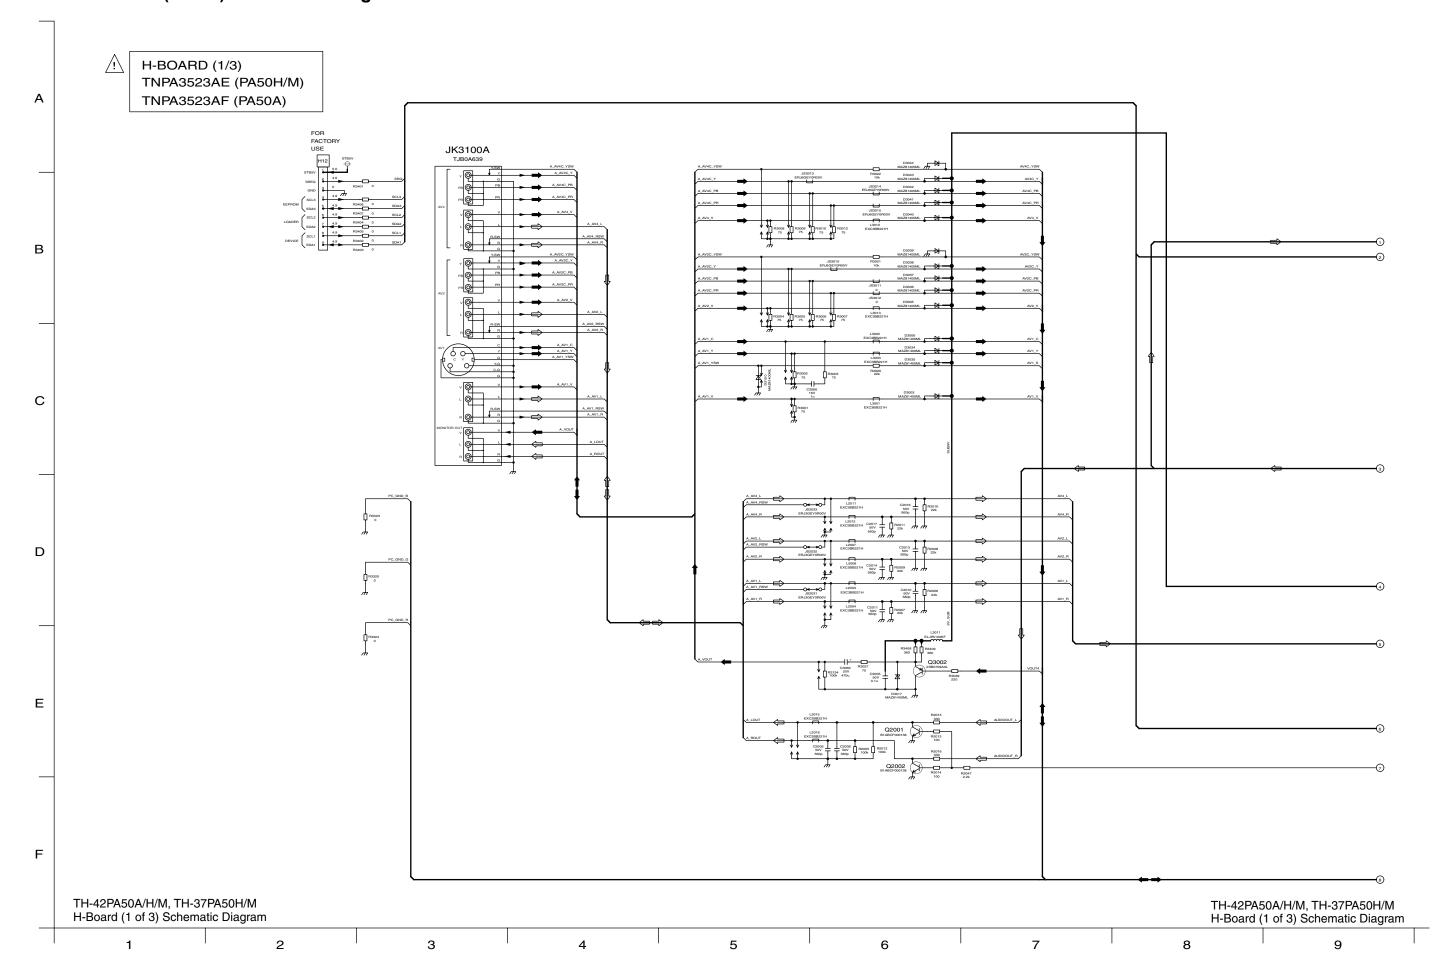


## 14.16. H-Board (2 of 3) Schematic Diagram

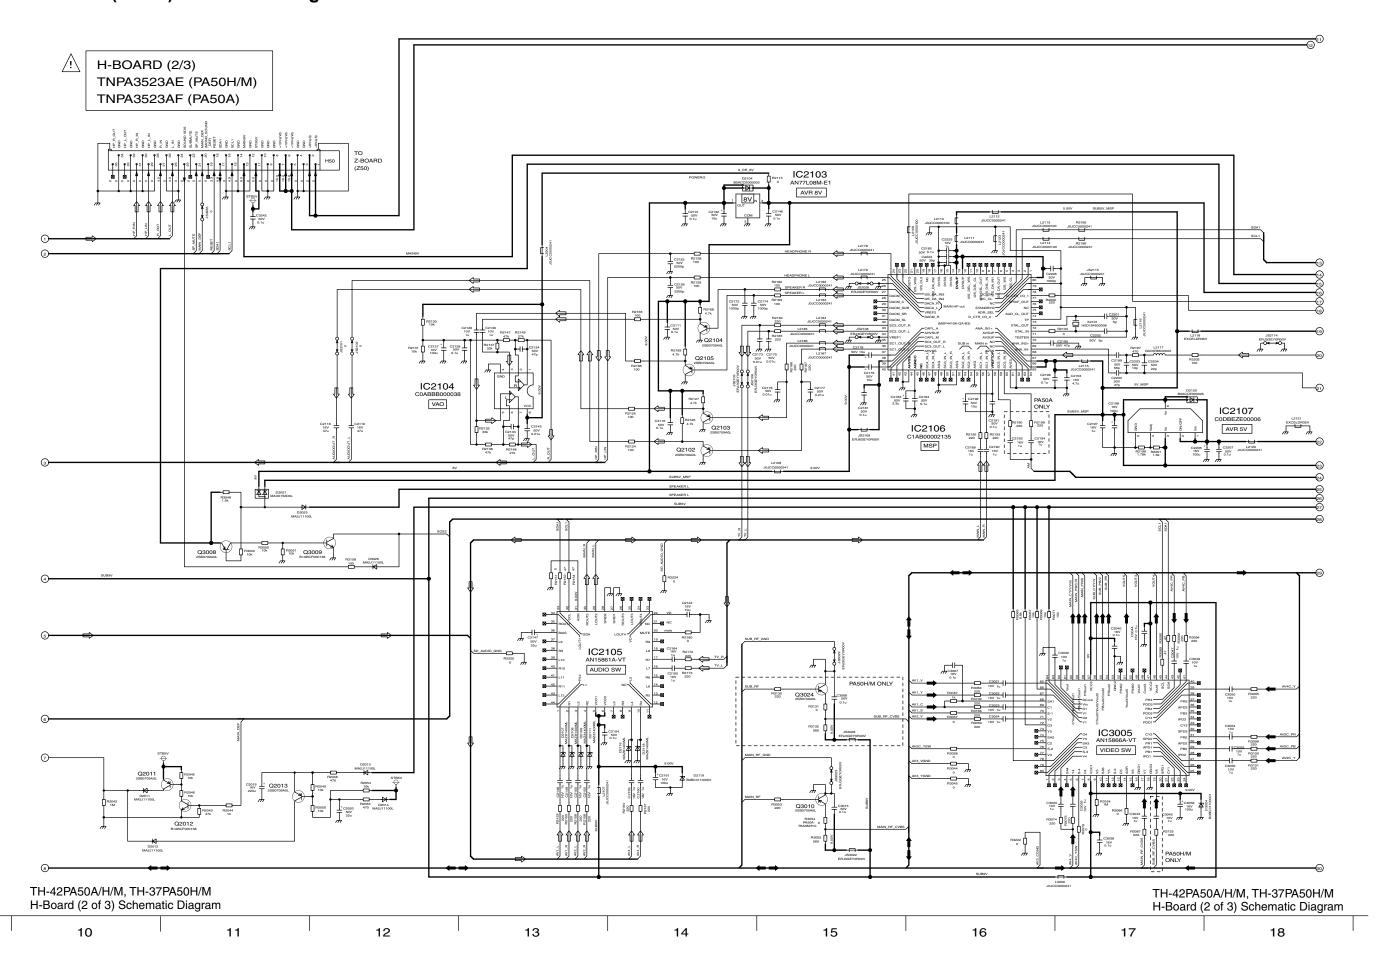


## 14.17. H-Board (3 of 3) Schematic Diagram

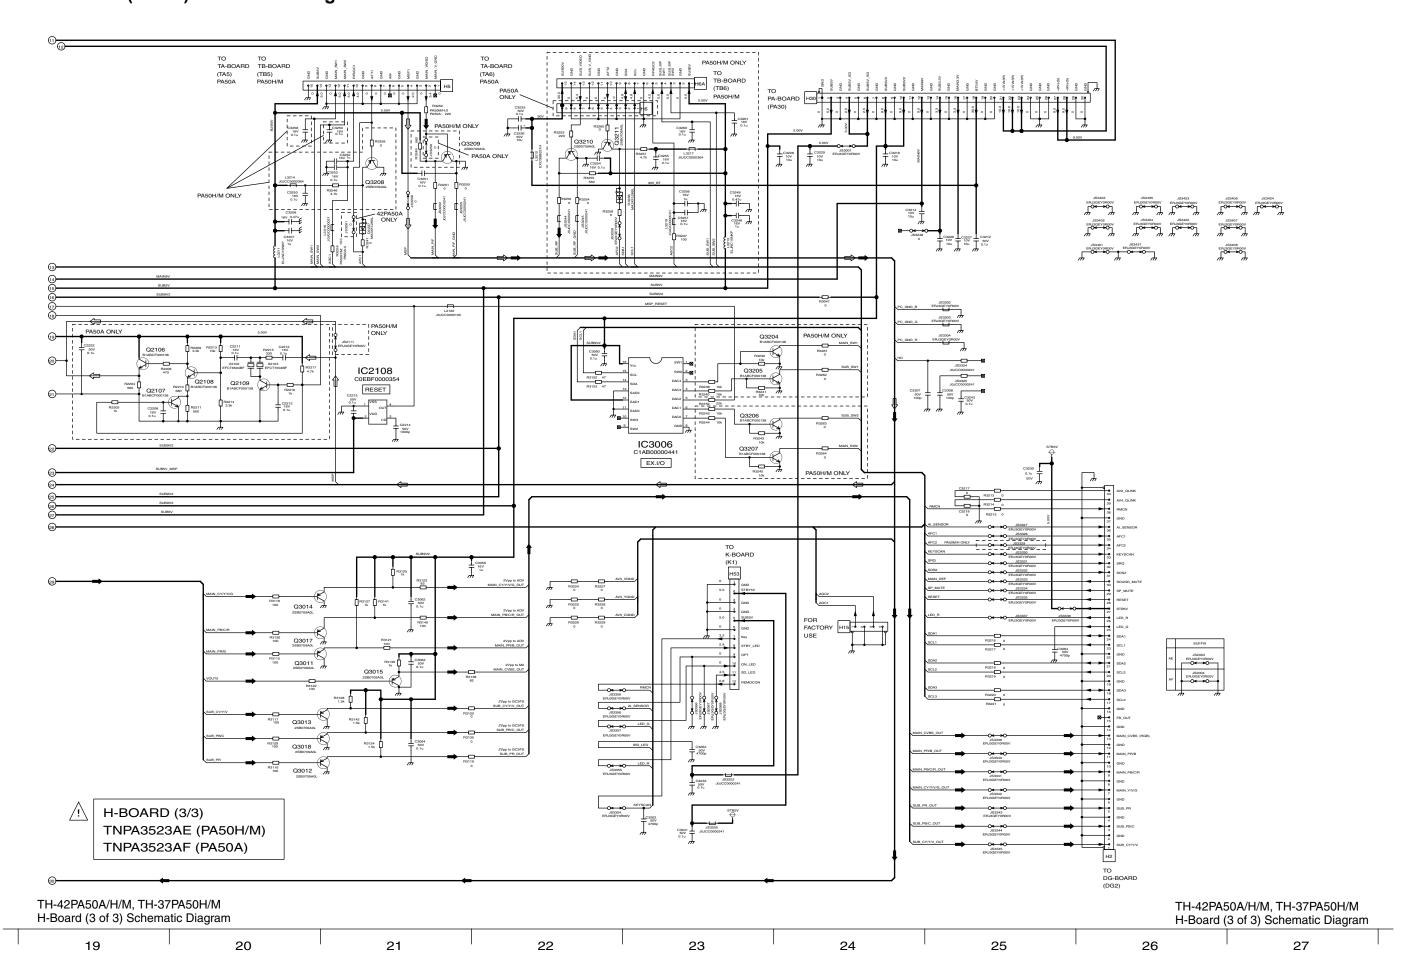


# 14.18. TA and TB-Board Schematic Diagram

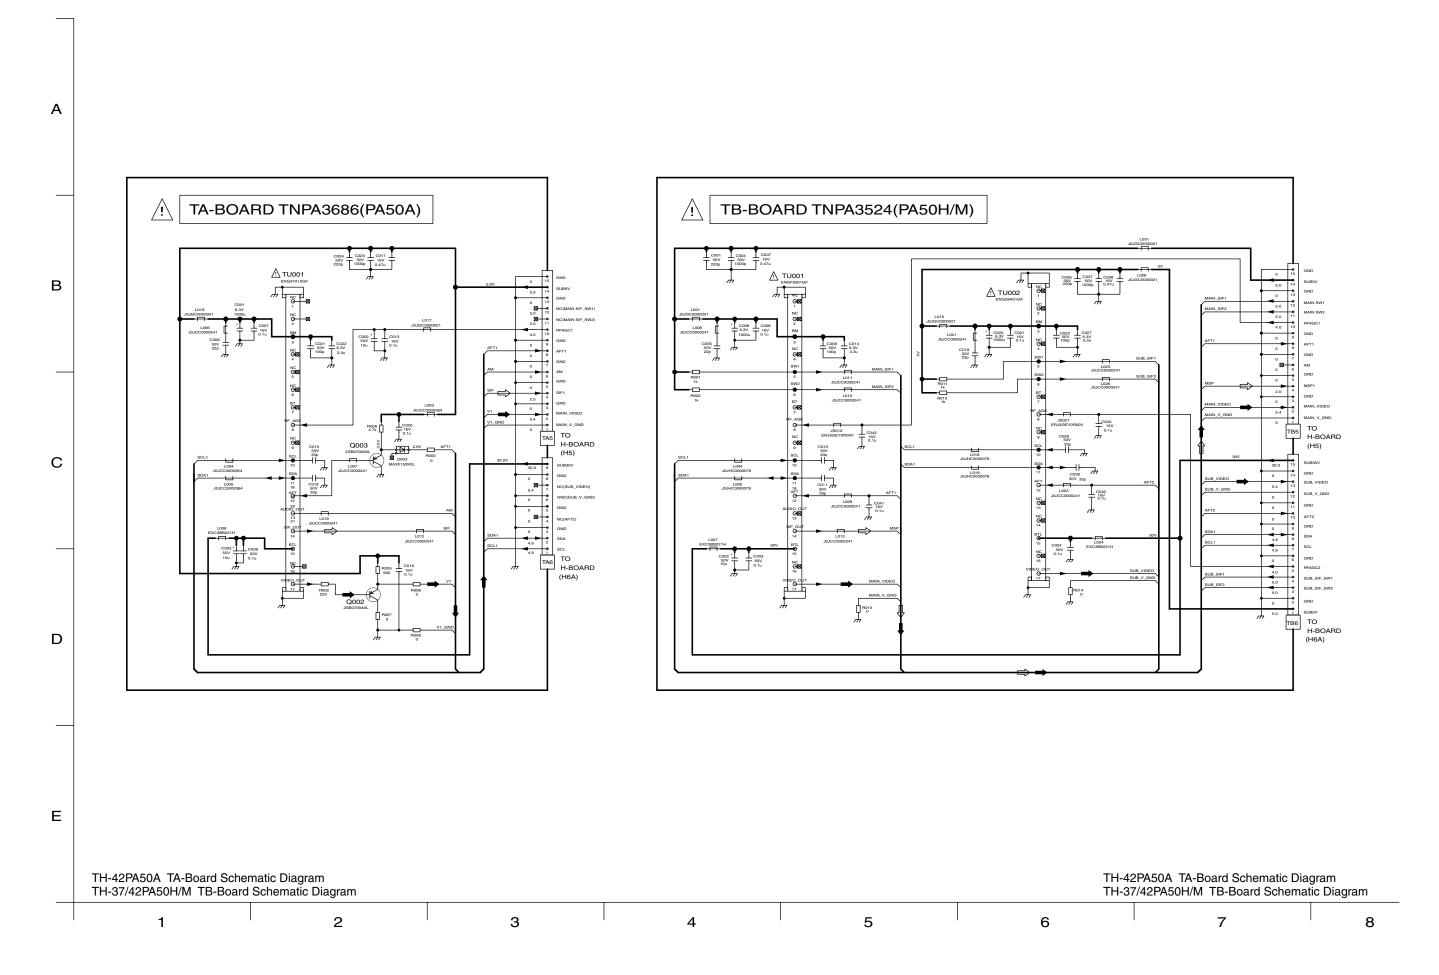


# 14.19. K and S-Board Schematic Diagram

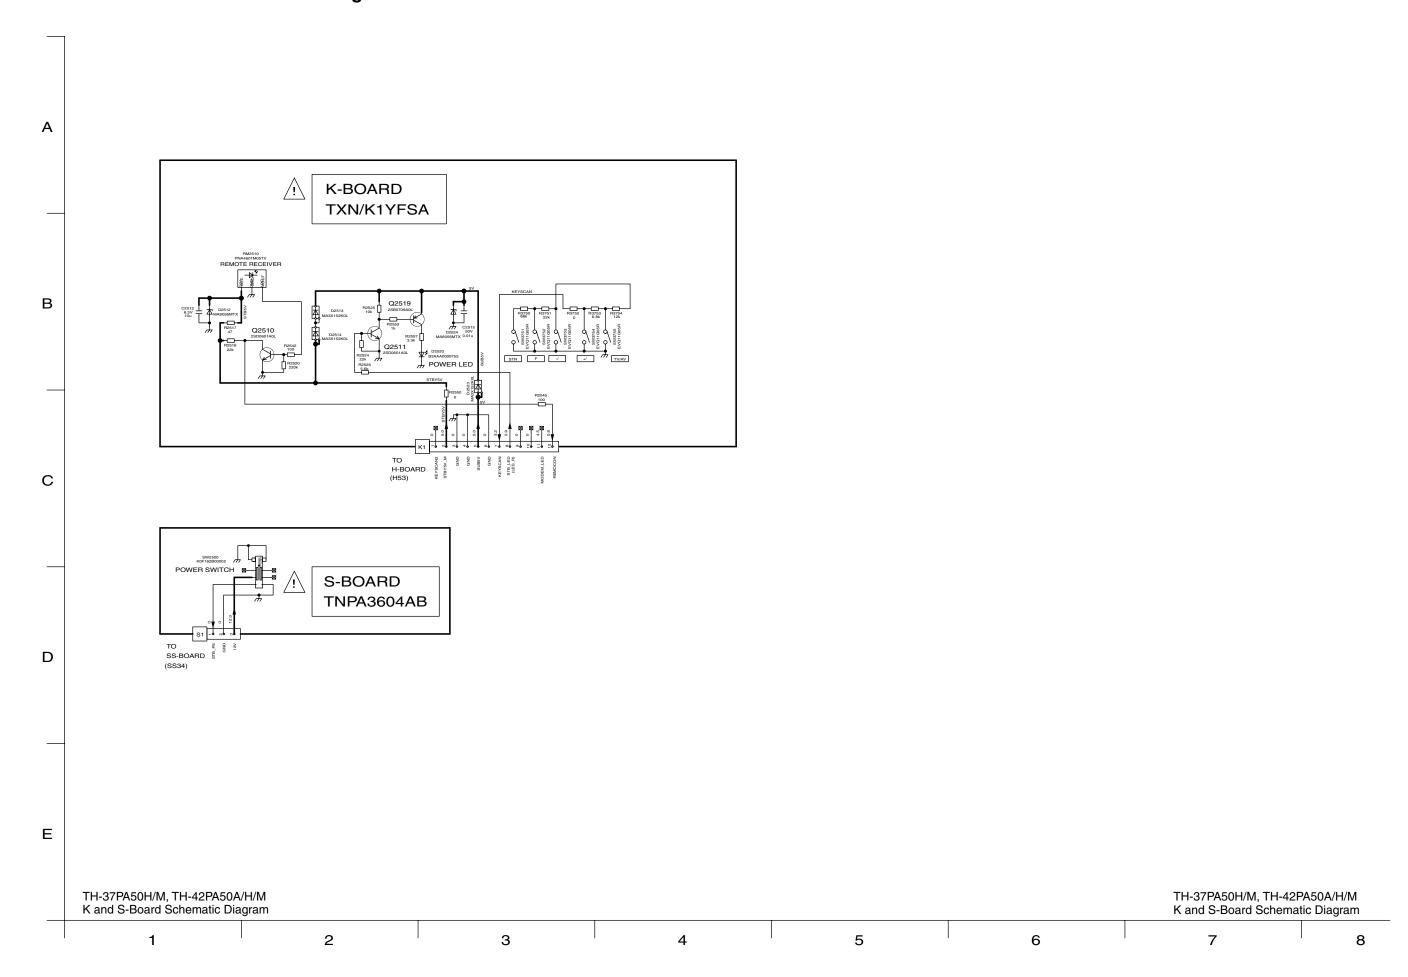

# 14.20. Z-Board Schematic Diagram

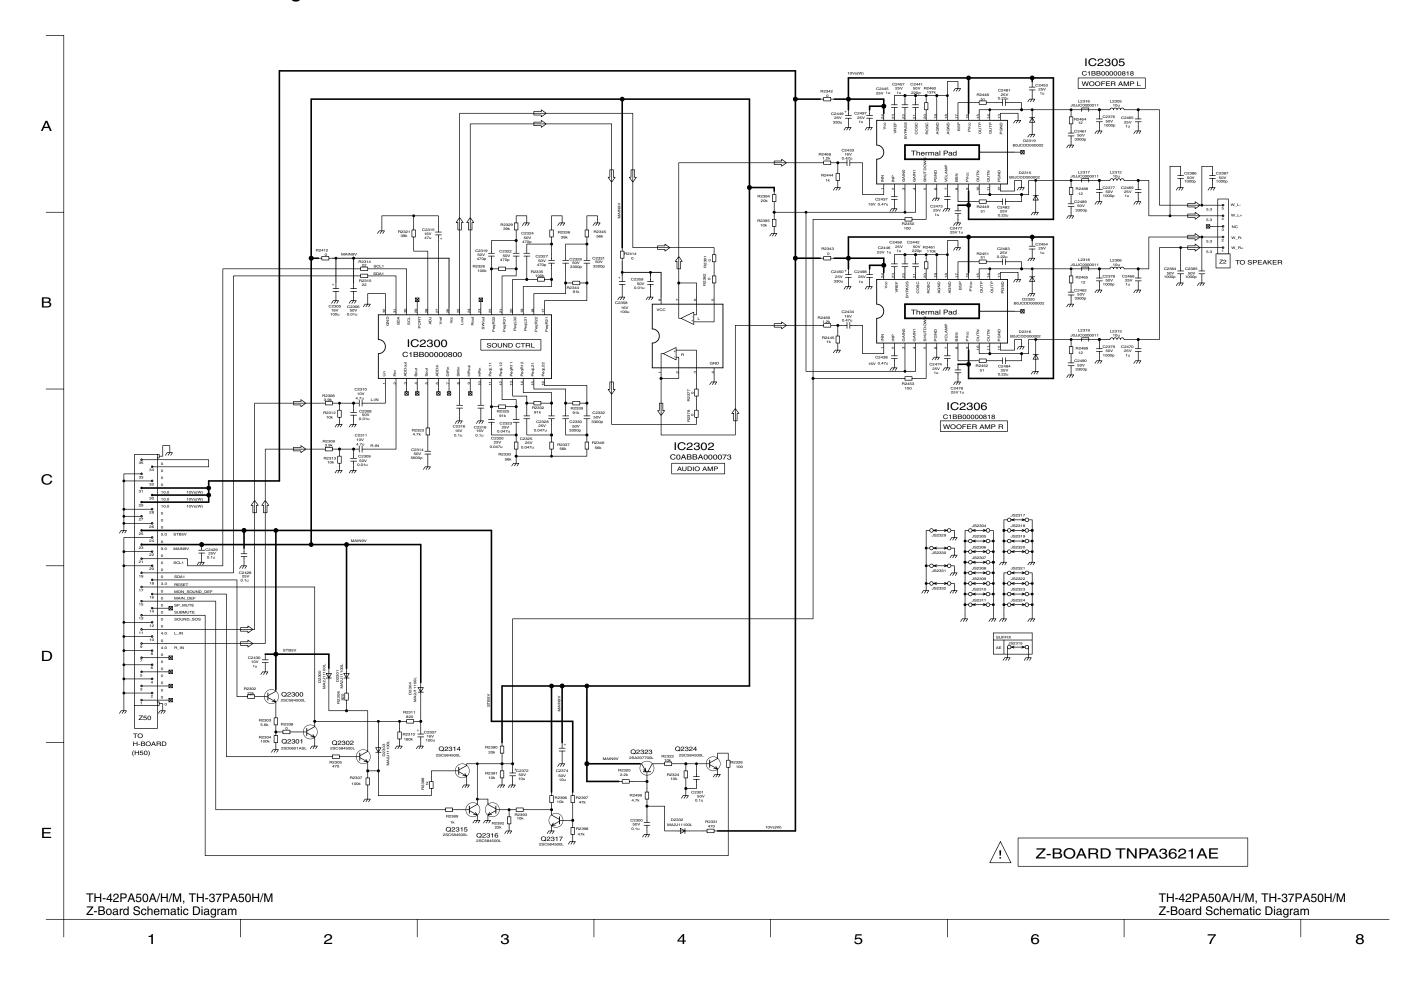


#### 14.21. DG-Board (1 of 2) Block Diagram

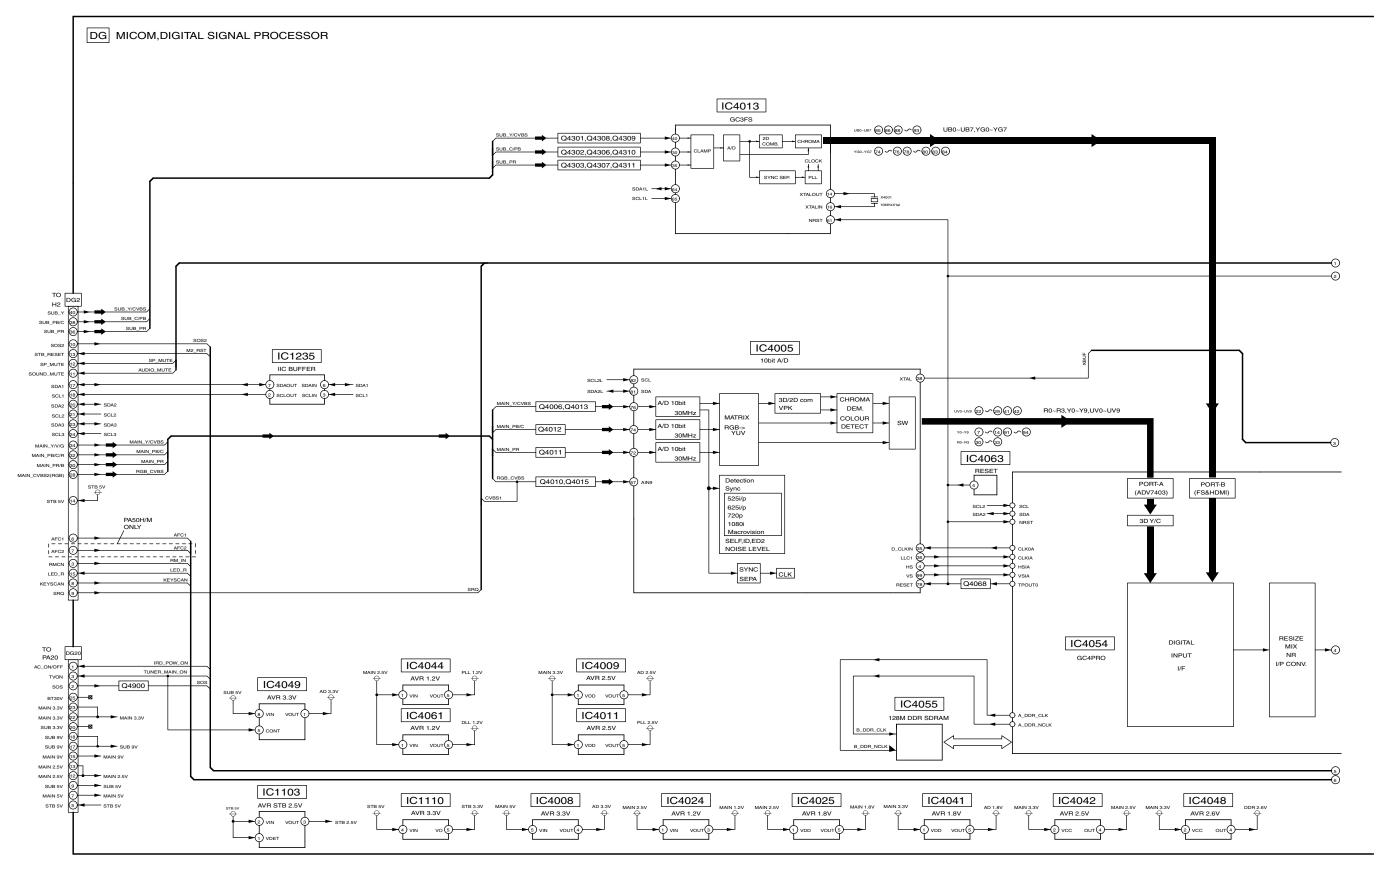

TH-42PA50A/H/M, TH-37PA50H/M DG-Board (1 of 2) Block Diagram

TH-42PA50A/H/M, TH-37PA50H/M DG-Board (1 of 2) Block Diagram


# 14.22. DG-Board (2 of 2) Block Diagram

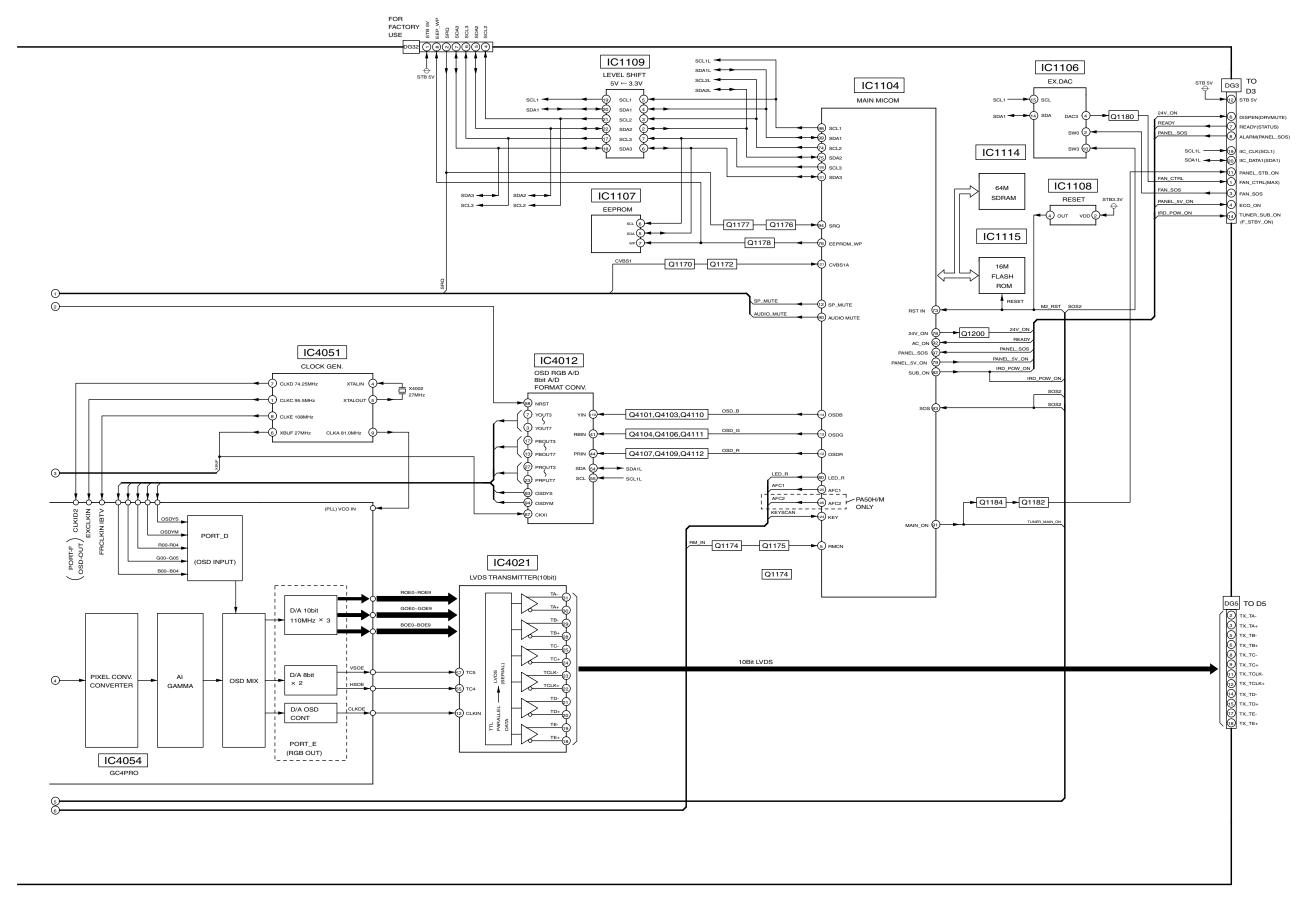


TH-42PA50A/H/M, TH-37PA50H/M DG-Board (2 of 2) Block Diagram

TH-42PA50A/H/M, TH-37PA50H/M DG-Board (2 of 2) Block Diagram


# 14.23. DG-Board (1 of 12) Schematic Diagram

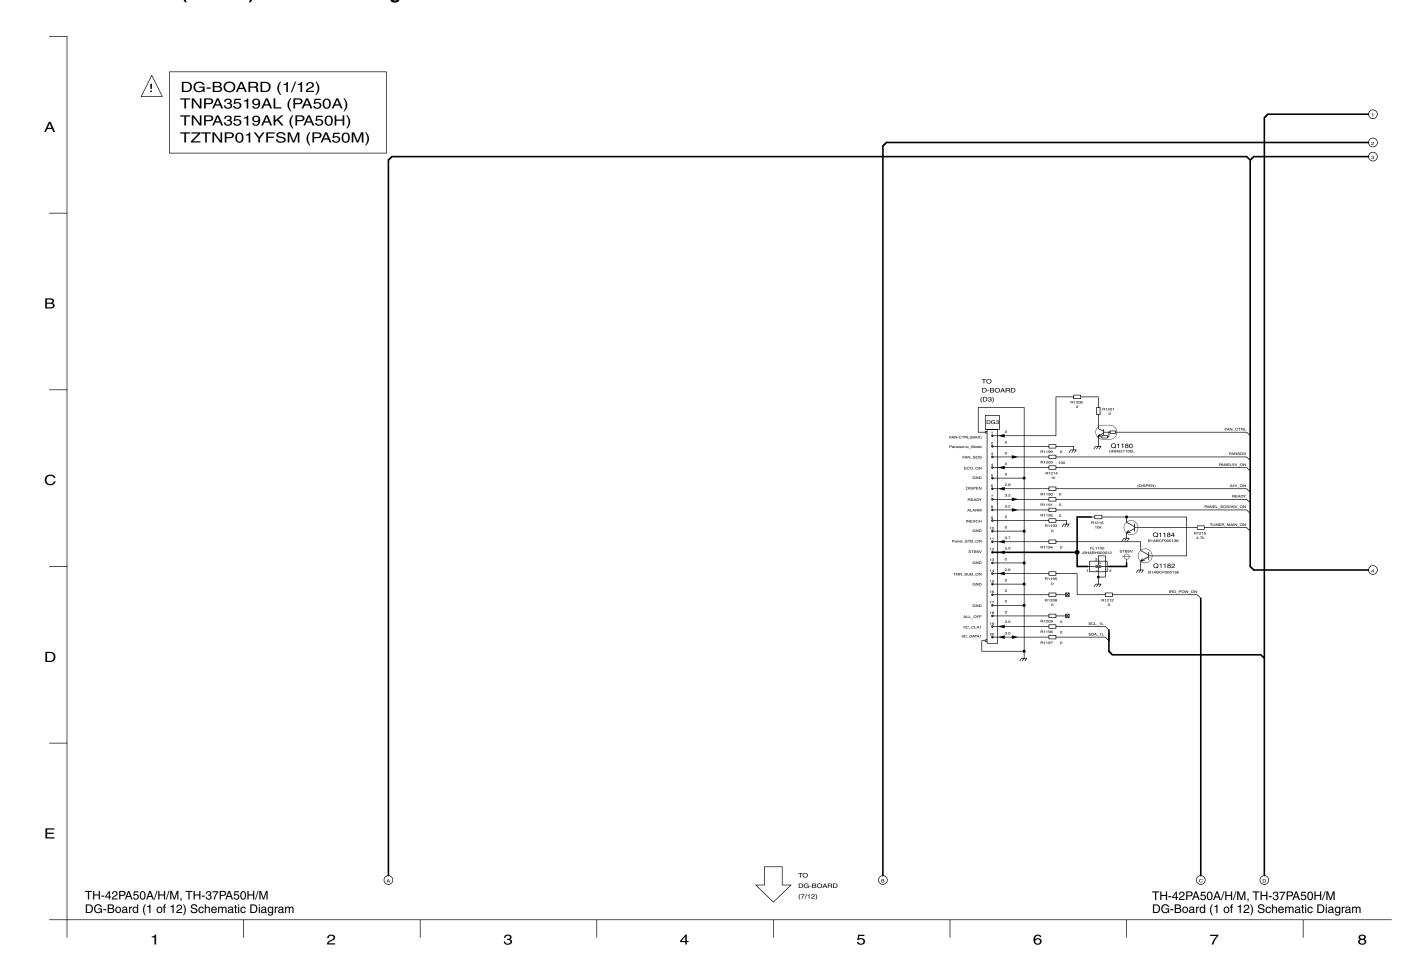


# 14.24. DG-Board (2 of 12) Schematic Diagram

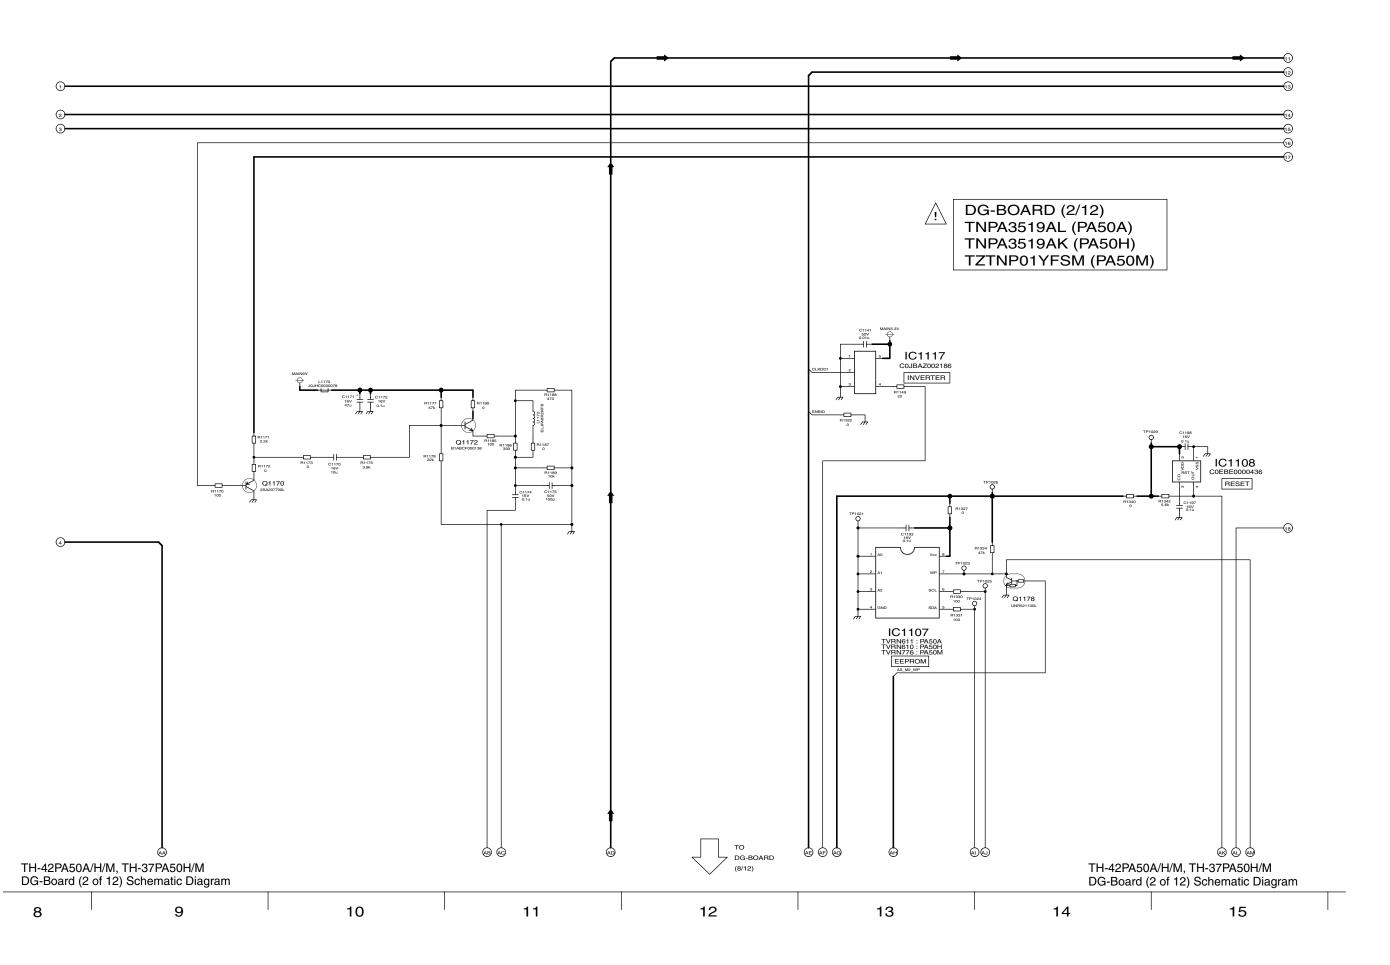


# 14.25. DG-Board (3 of 12) Schematic Diagram

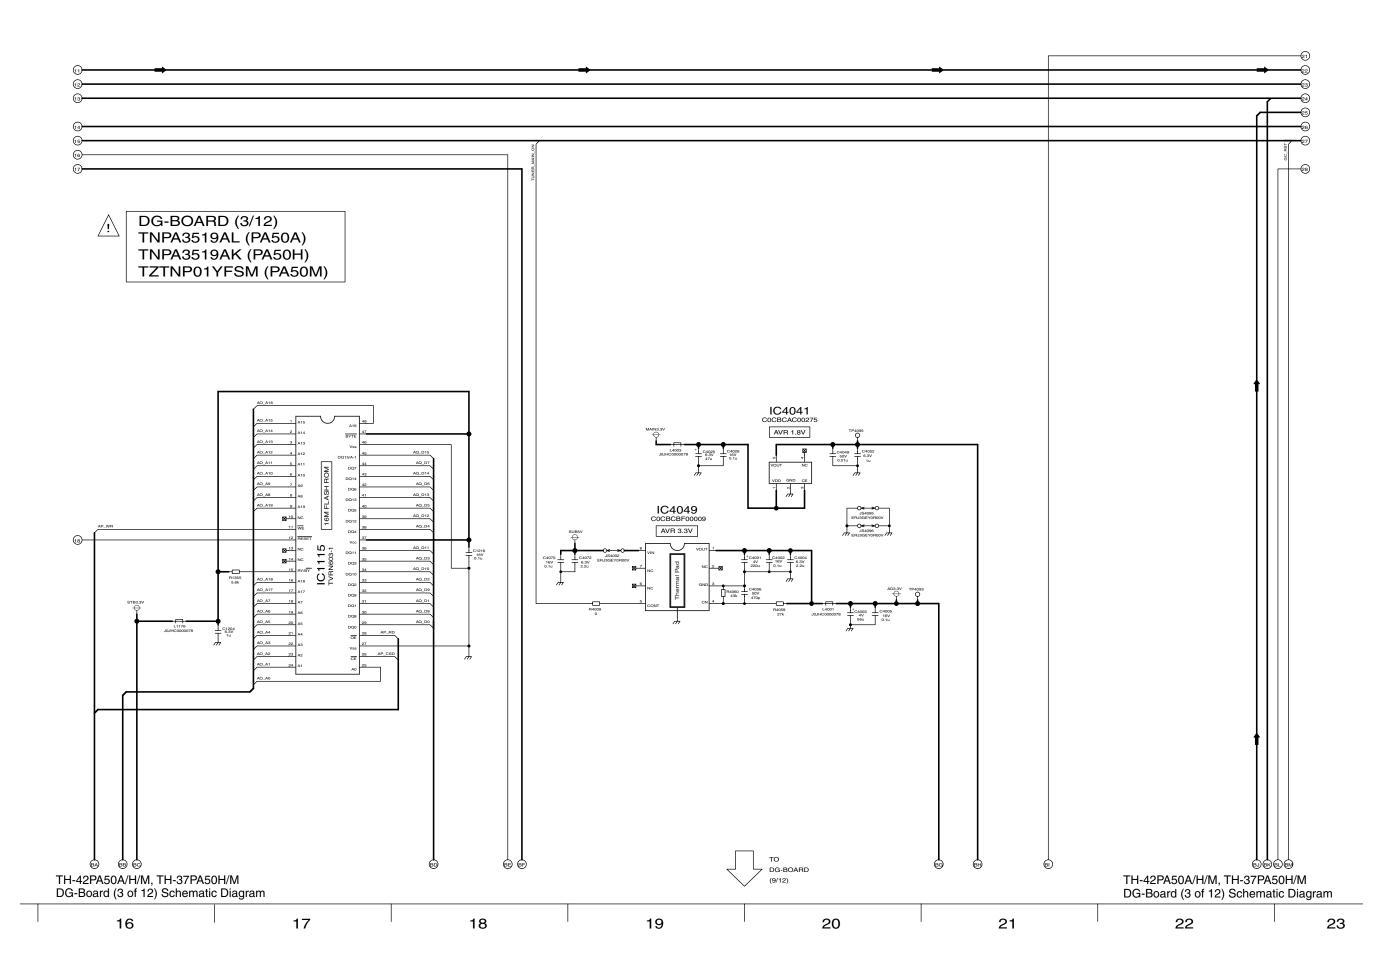


## 14.26. DG-Board (4 of 12) Schematic Diagram

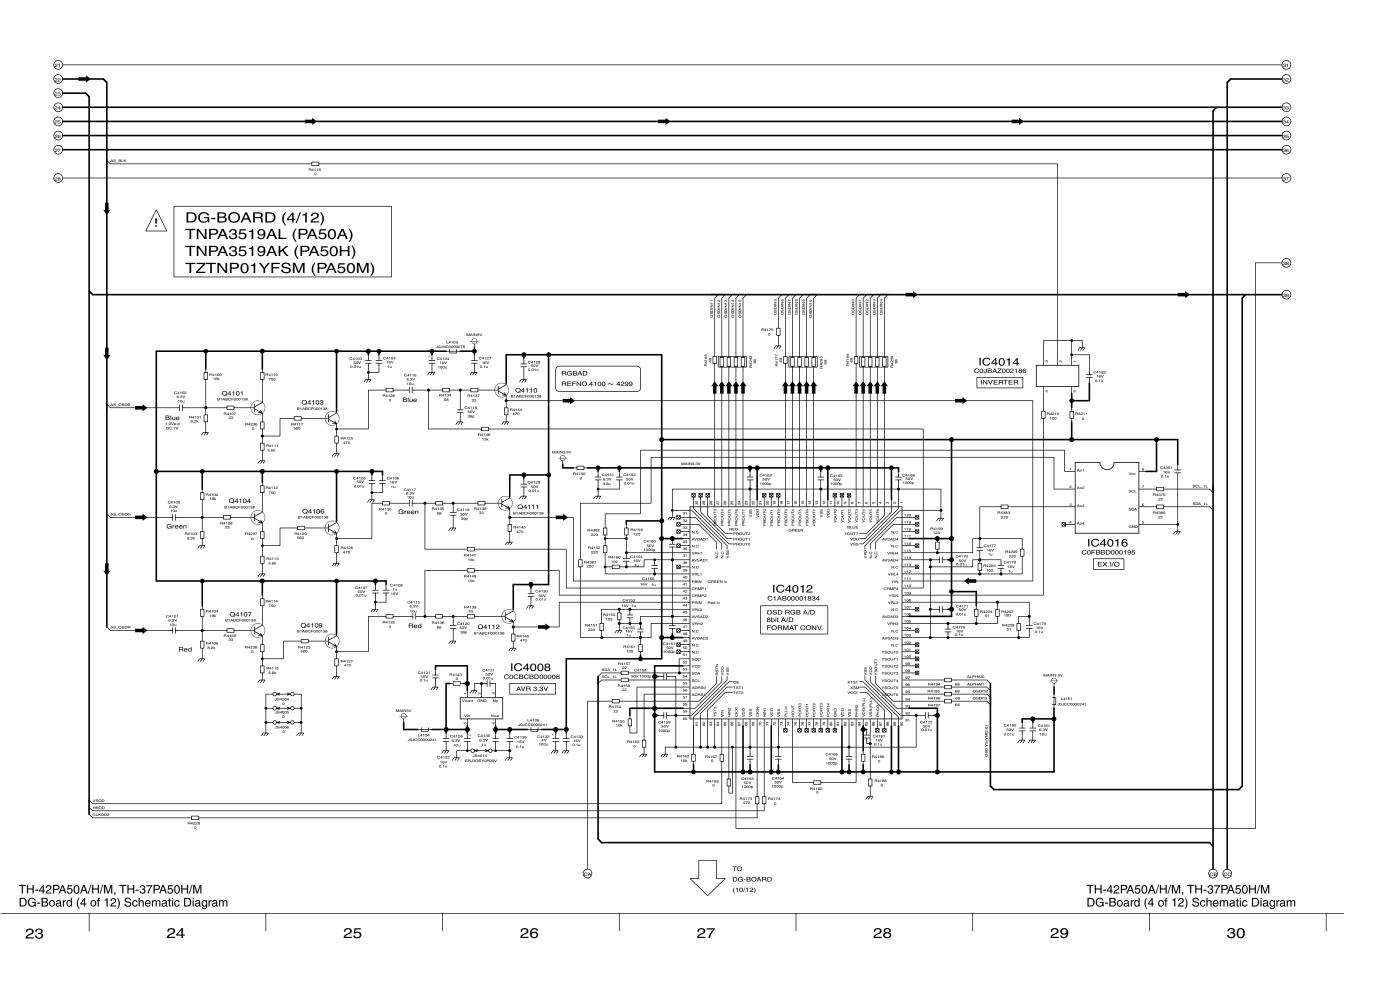


#### 14.27. DG-Board (5 of 12) Schematic Diagram

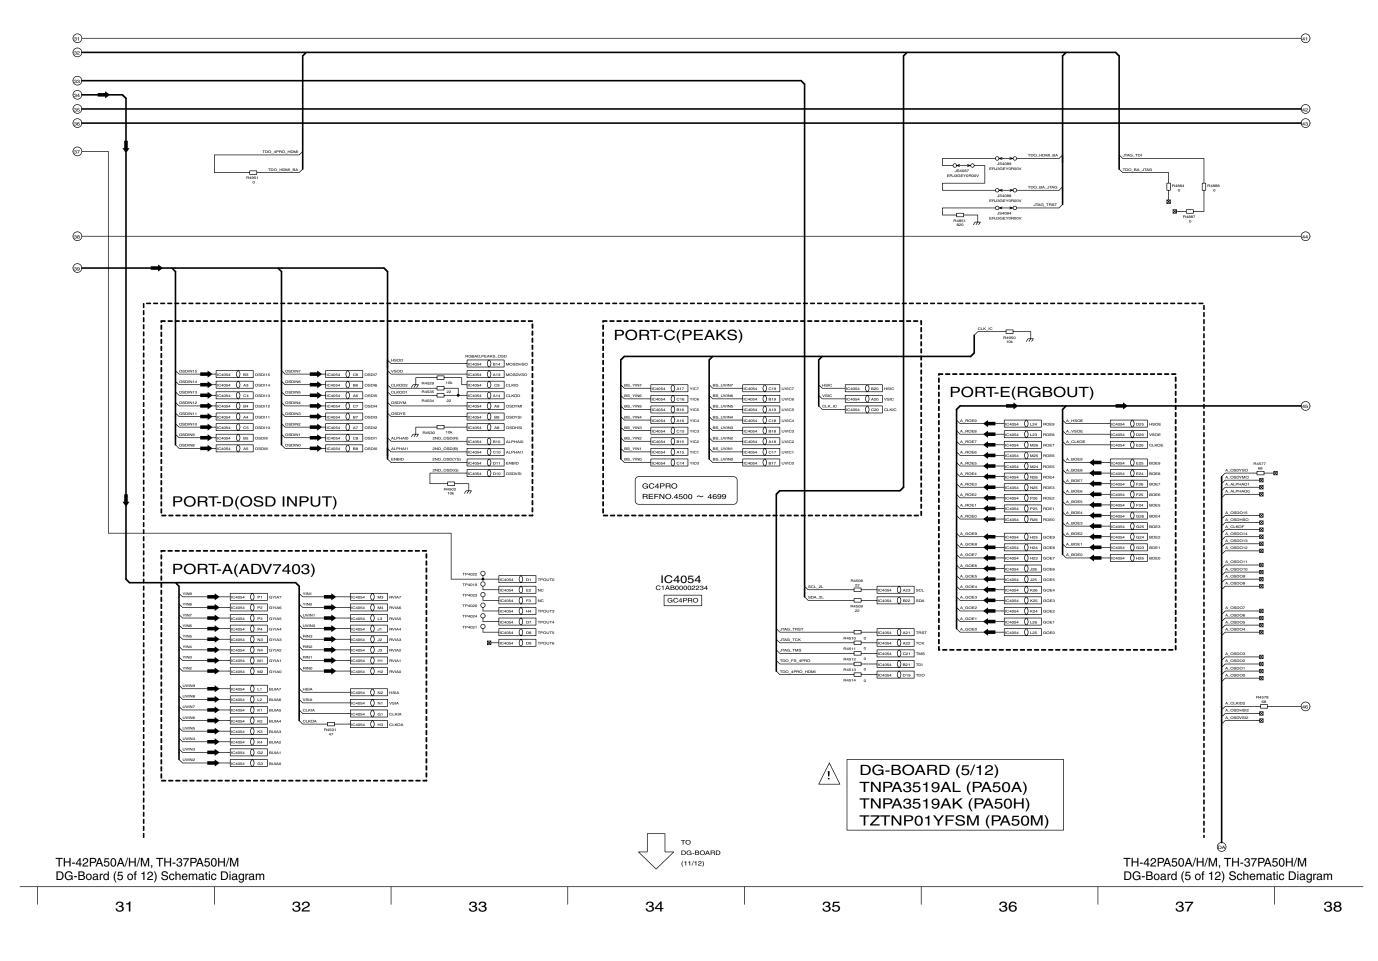


# 14.28. DG-Board (6 of 12) Schematic Diagram

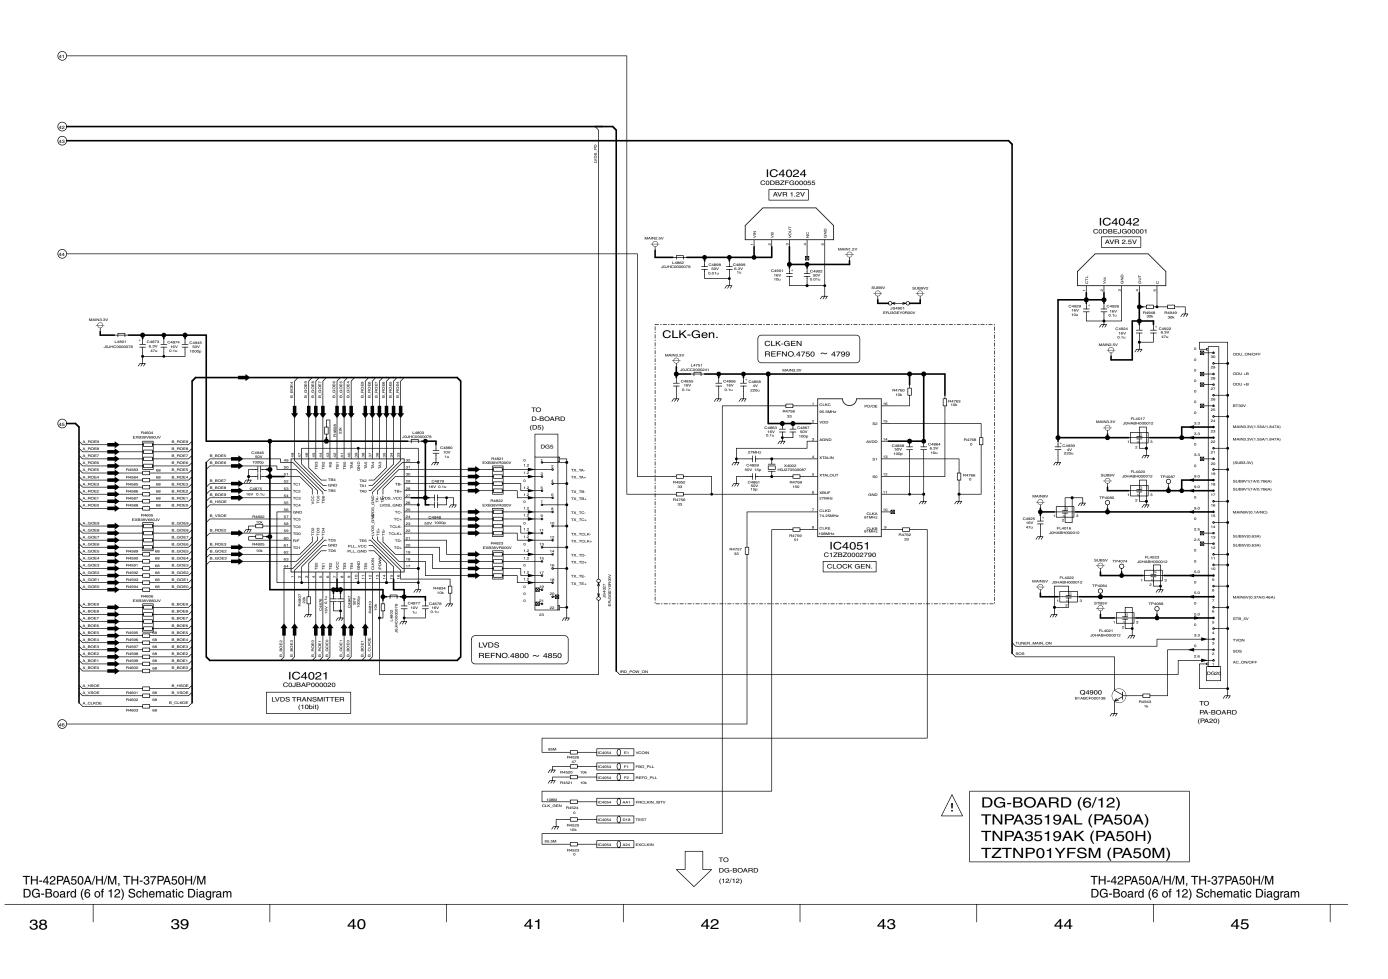


# 14.29. DG-Board (7 of 12) Schematic Diagram

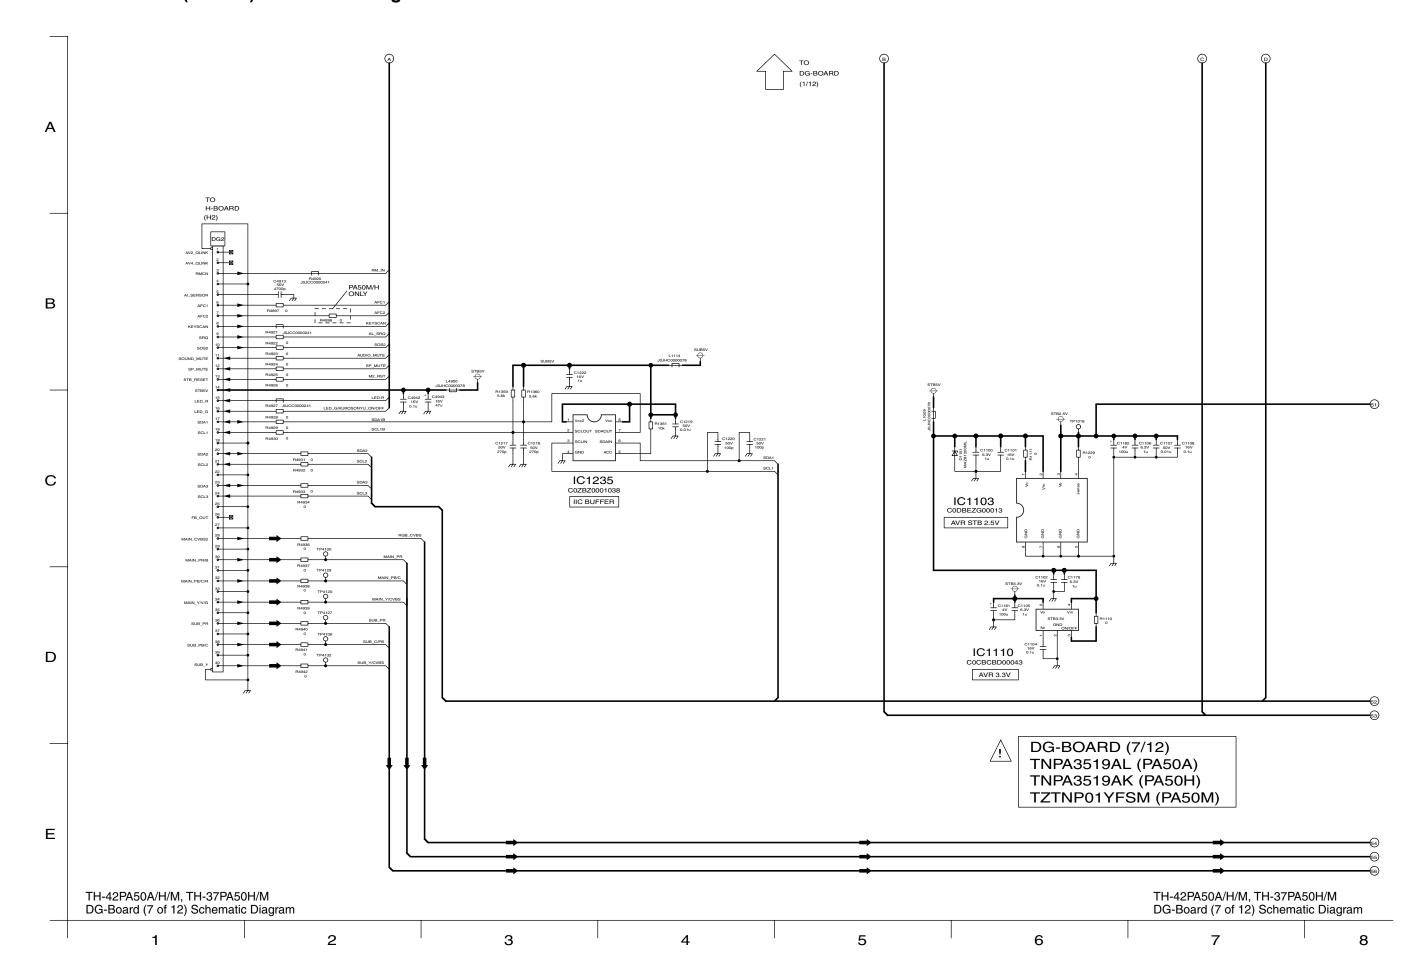


## 14.30. DG-Board (8 of 12) Schematic Diagram

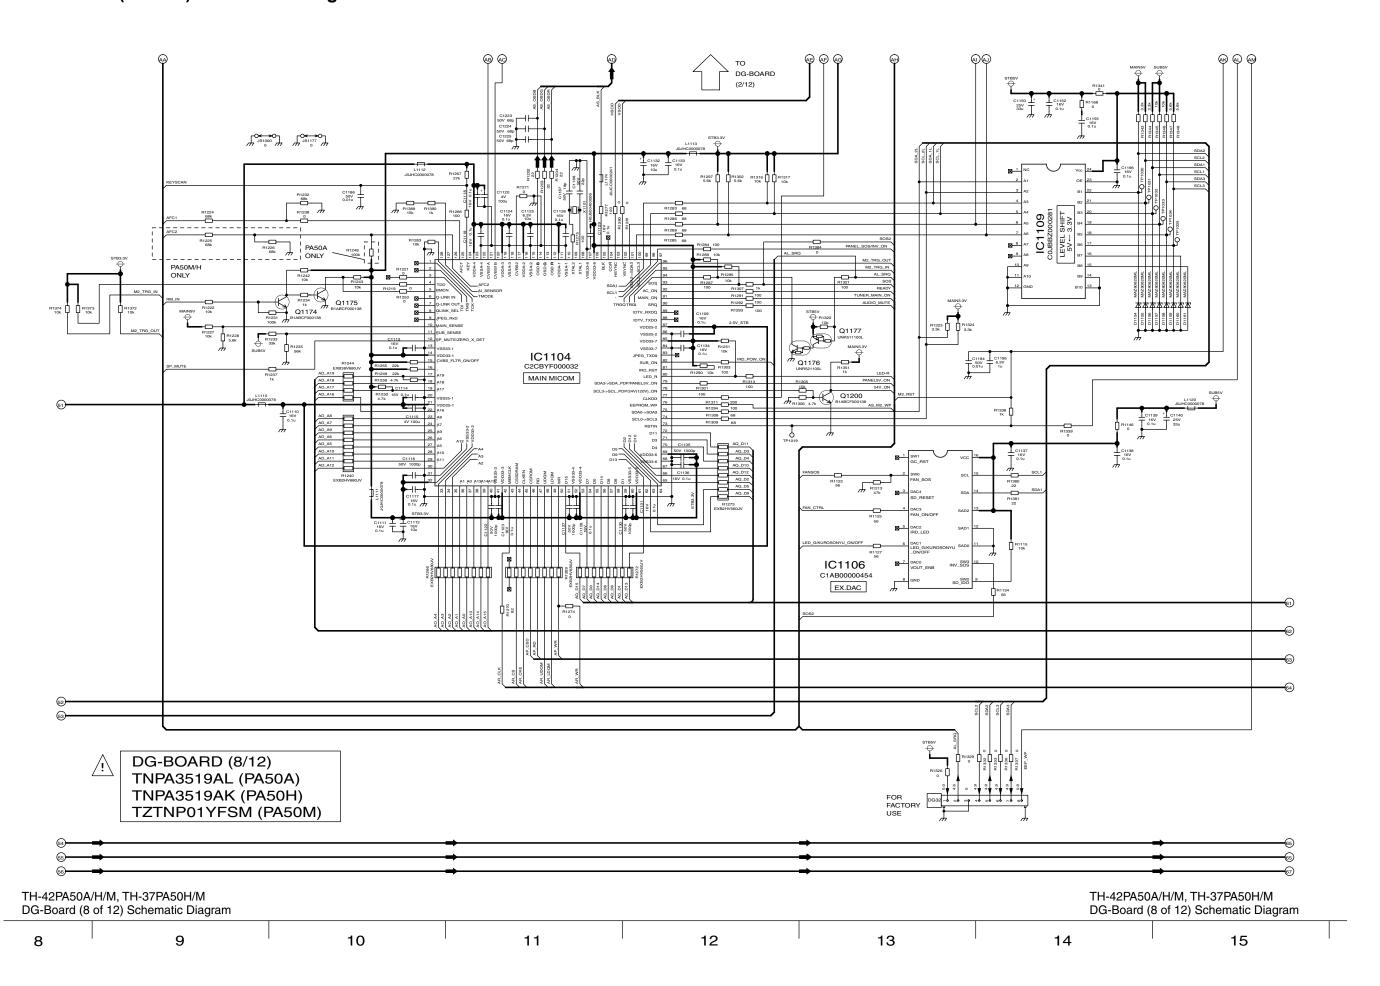


# 14.31. DG-Board (9 of 12) Schematic Diagram

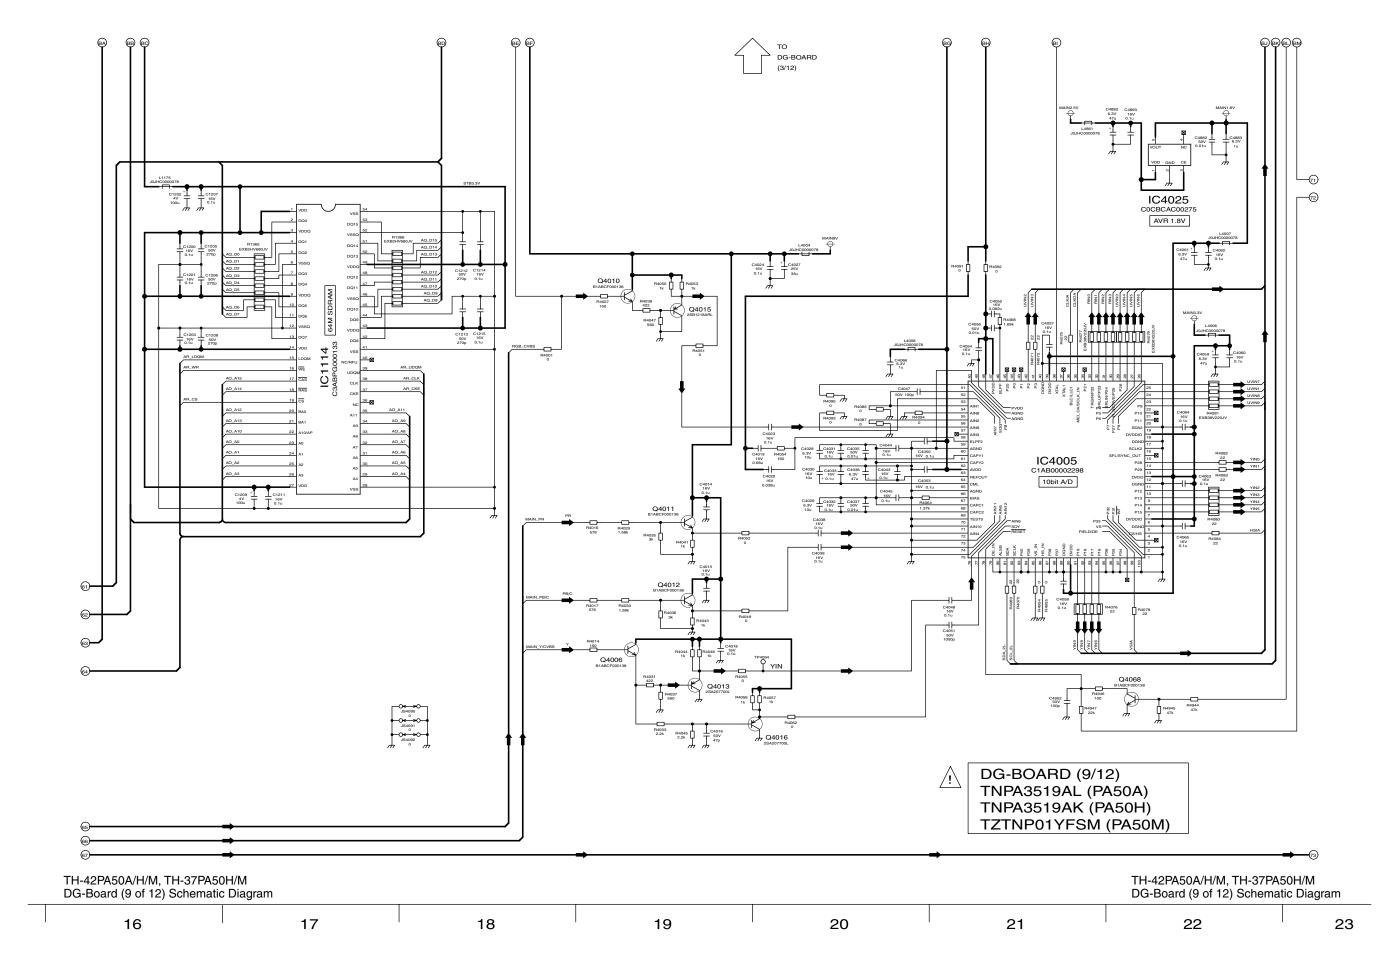

## 14.32. DG-Board (10 of 12) Schematic Diagram

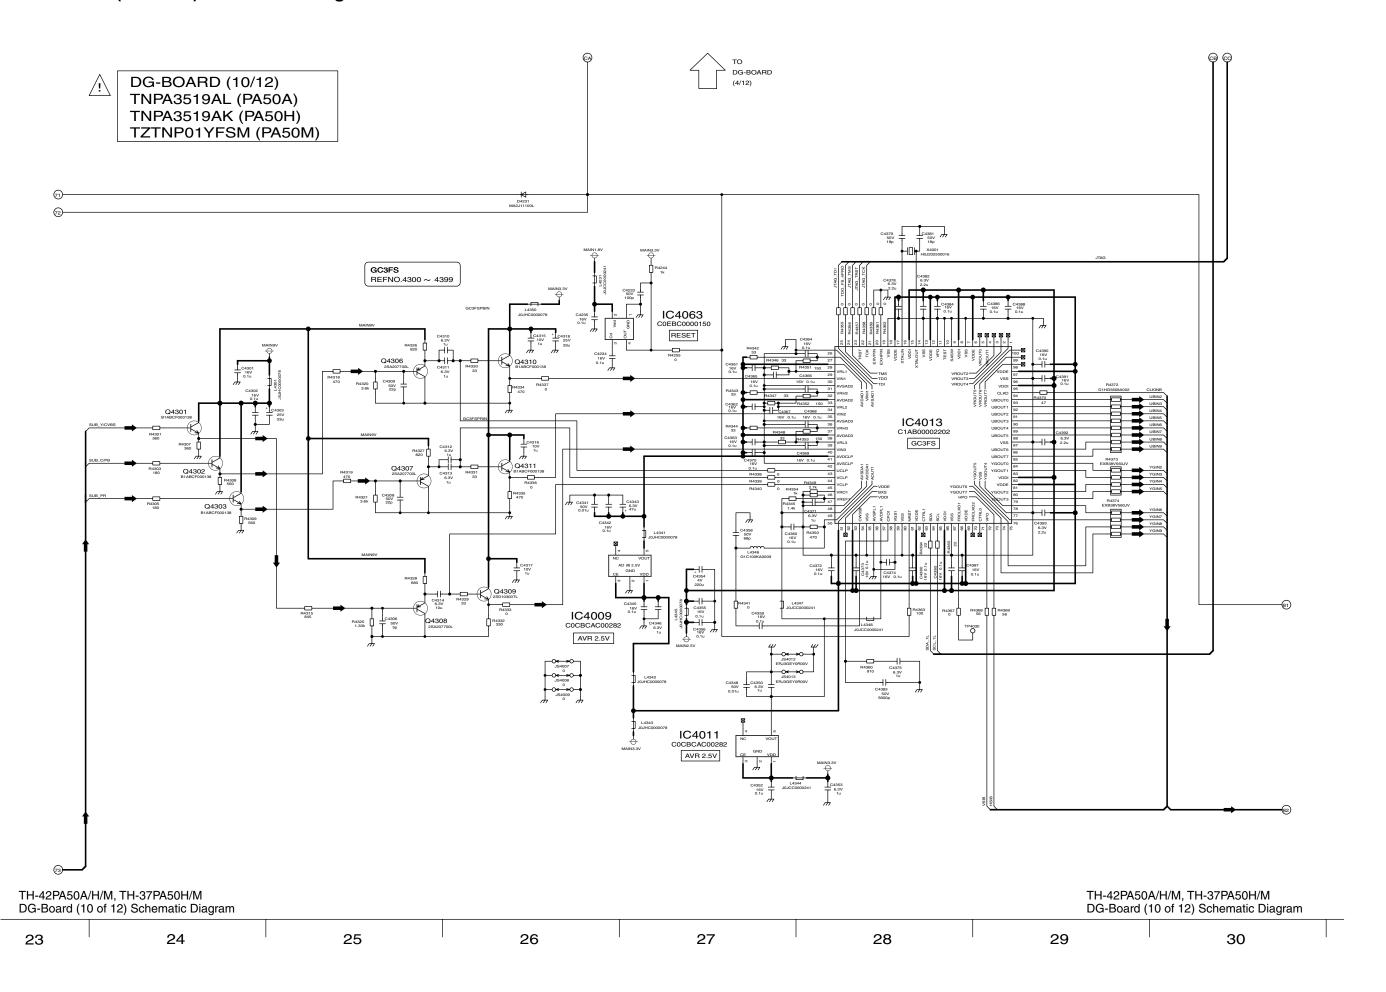


#### 14.33. DG-Board (11 of 12) Schematic Diagram

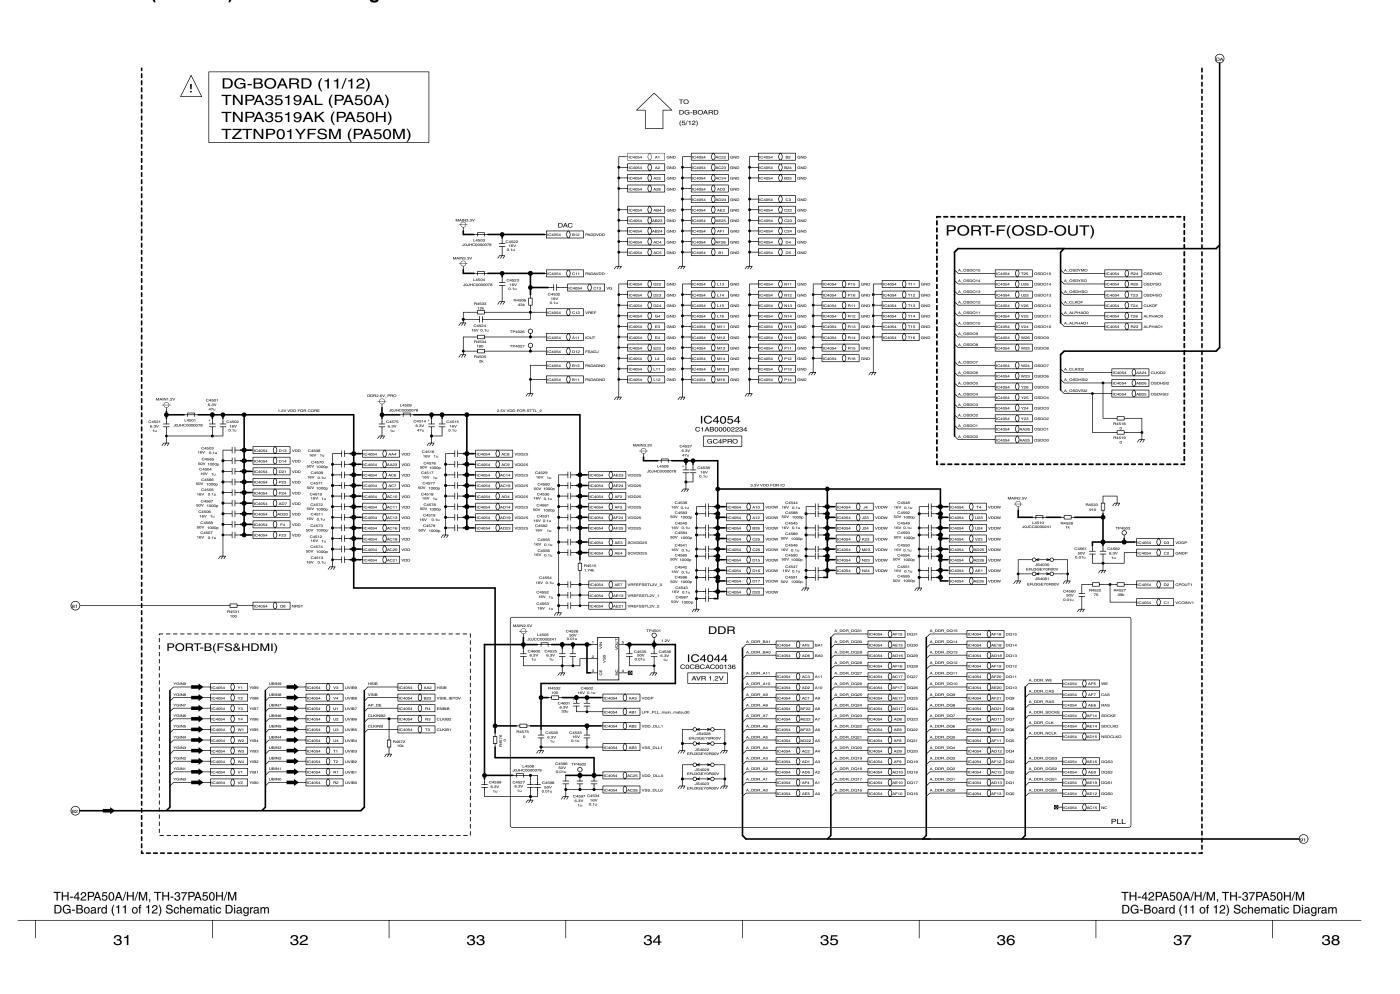

#### 14.34. DG-Board (12 of 12) Schematic Diagram






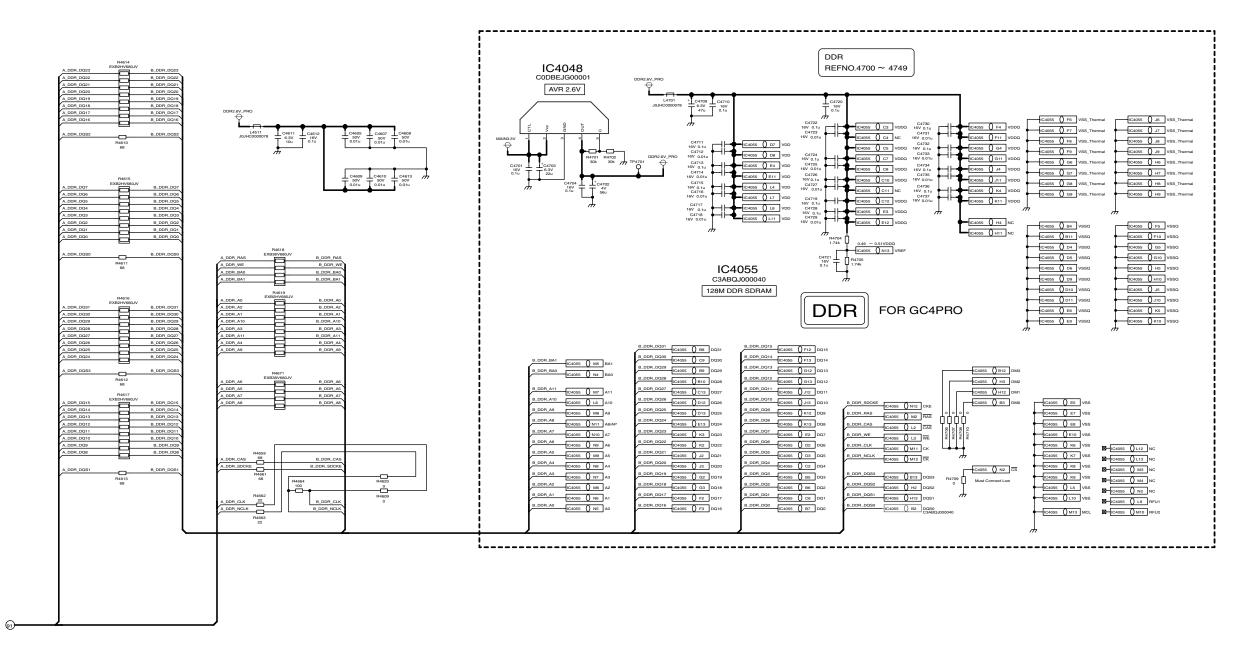




## 14.35. D-Board Block Diagram

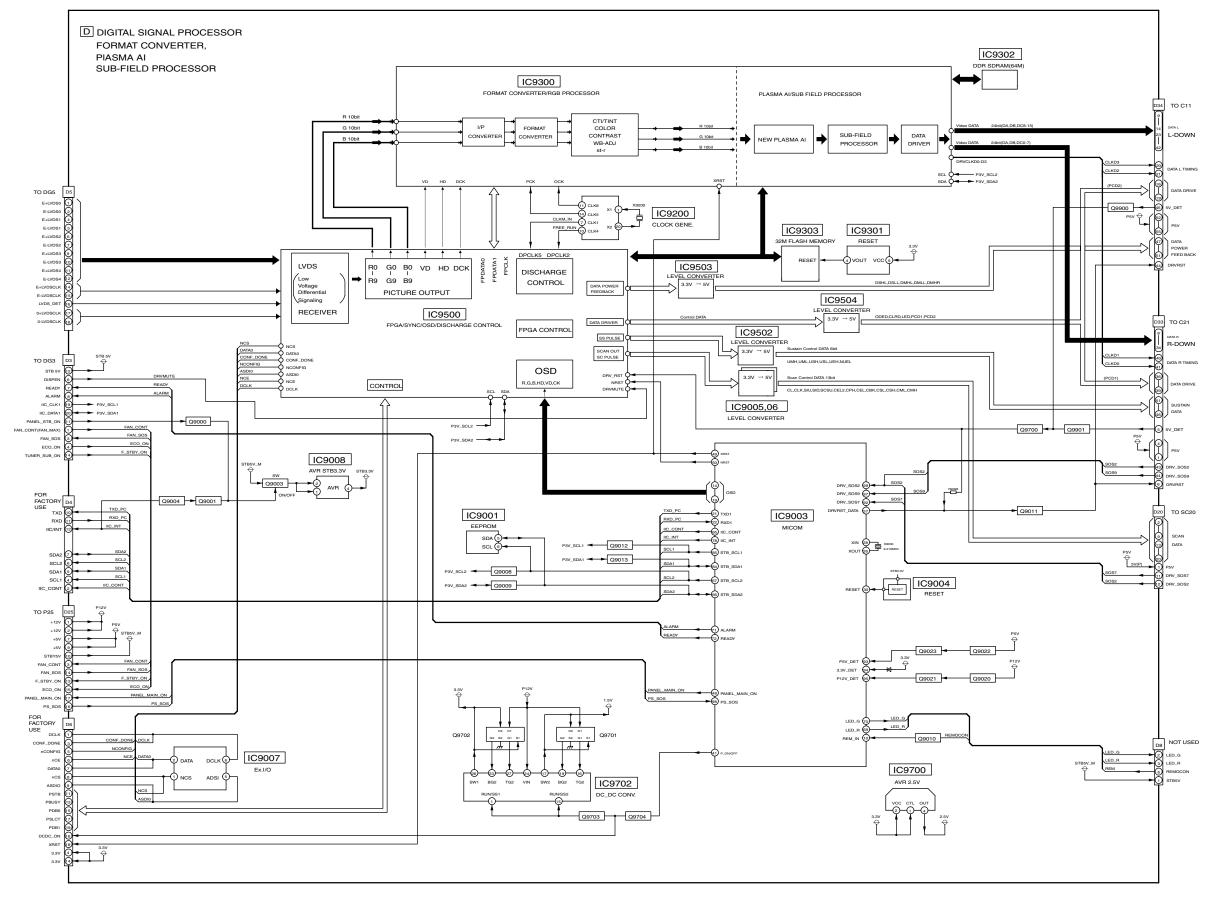


TH-42PA50A/H/M, TH-37PA50H/M D-Board Block Diagram TH-42PA50A/H/M, TH-37PA50H/M D-Board Block Diagram


## 14.36. D-Board (1 of 6) Schematic Diagram

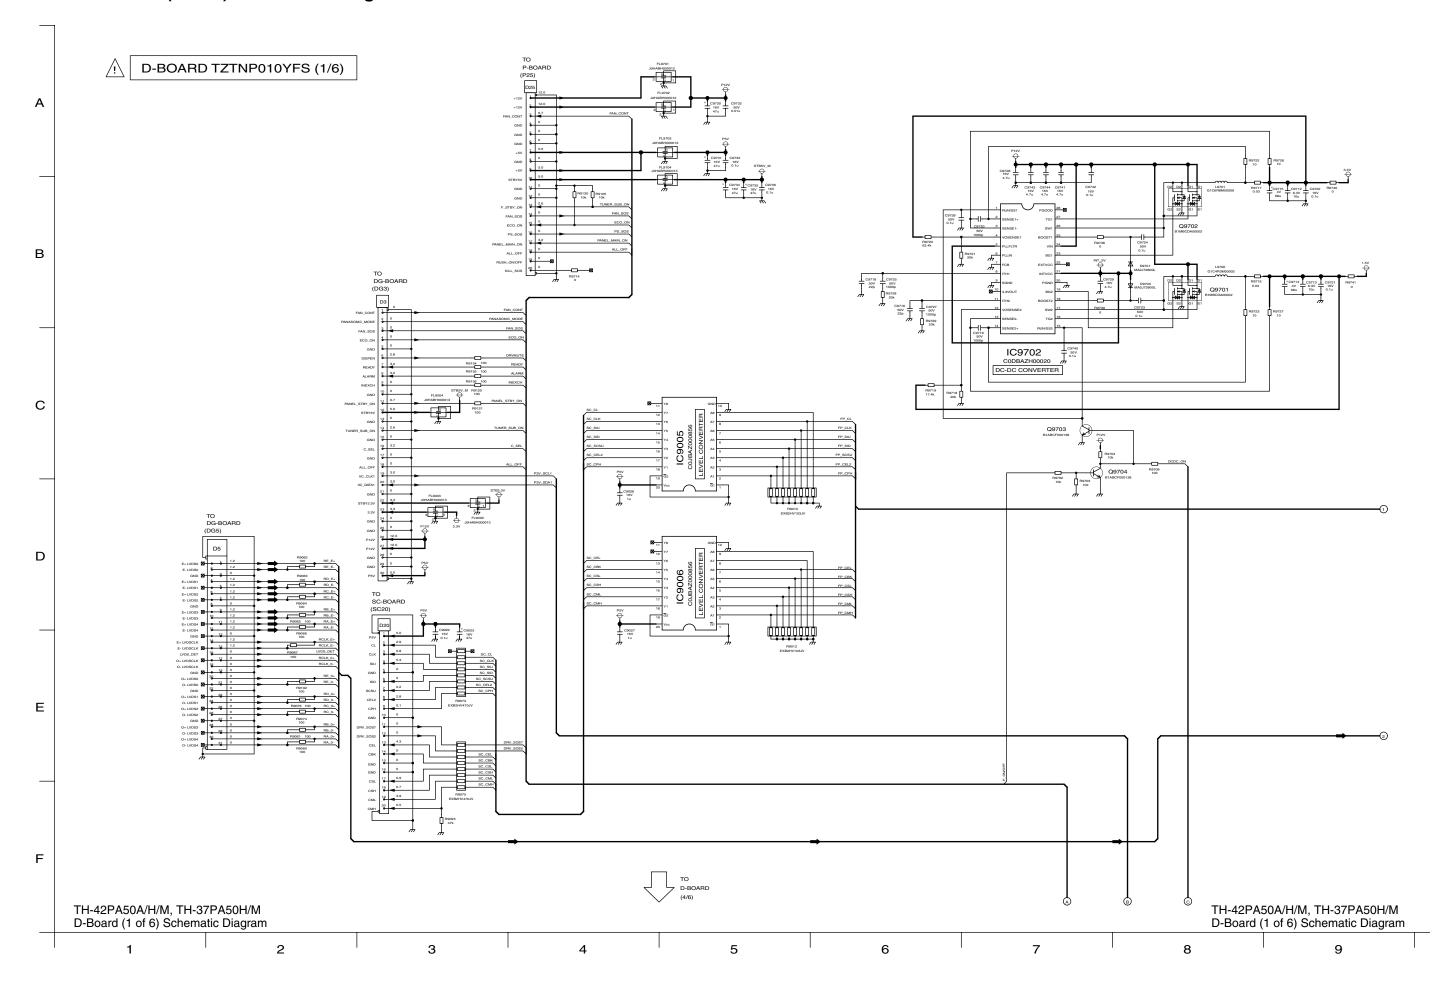


## 14.37. D-Board (2 of 6) Schematic Diagram

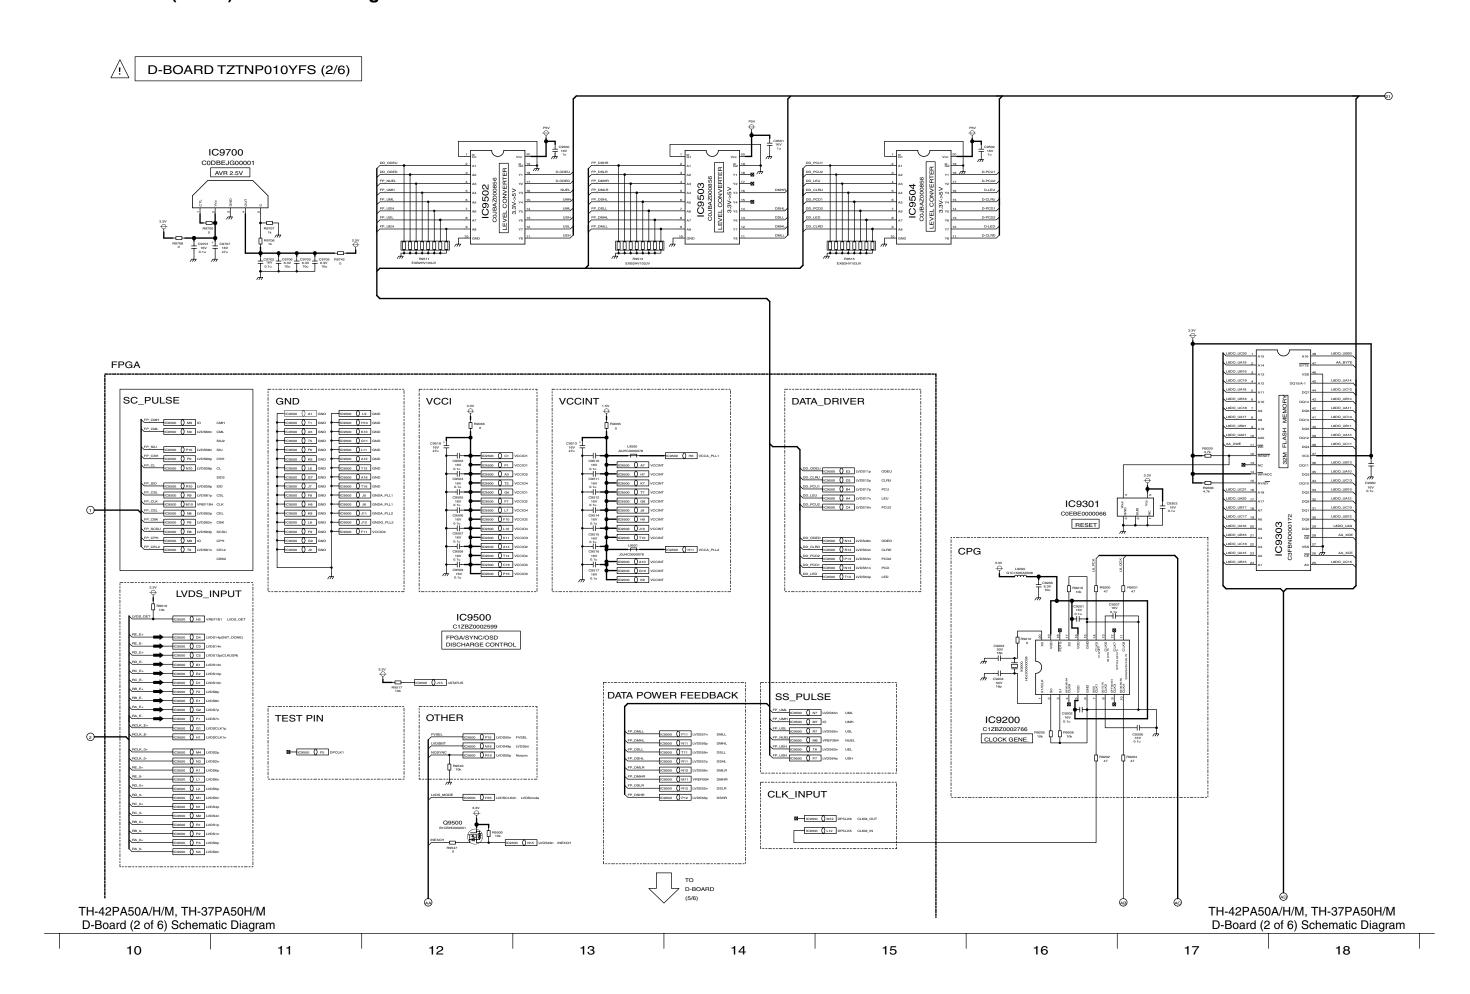


#### 14.38. D-Board (3 of 6) Schematic Diagram

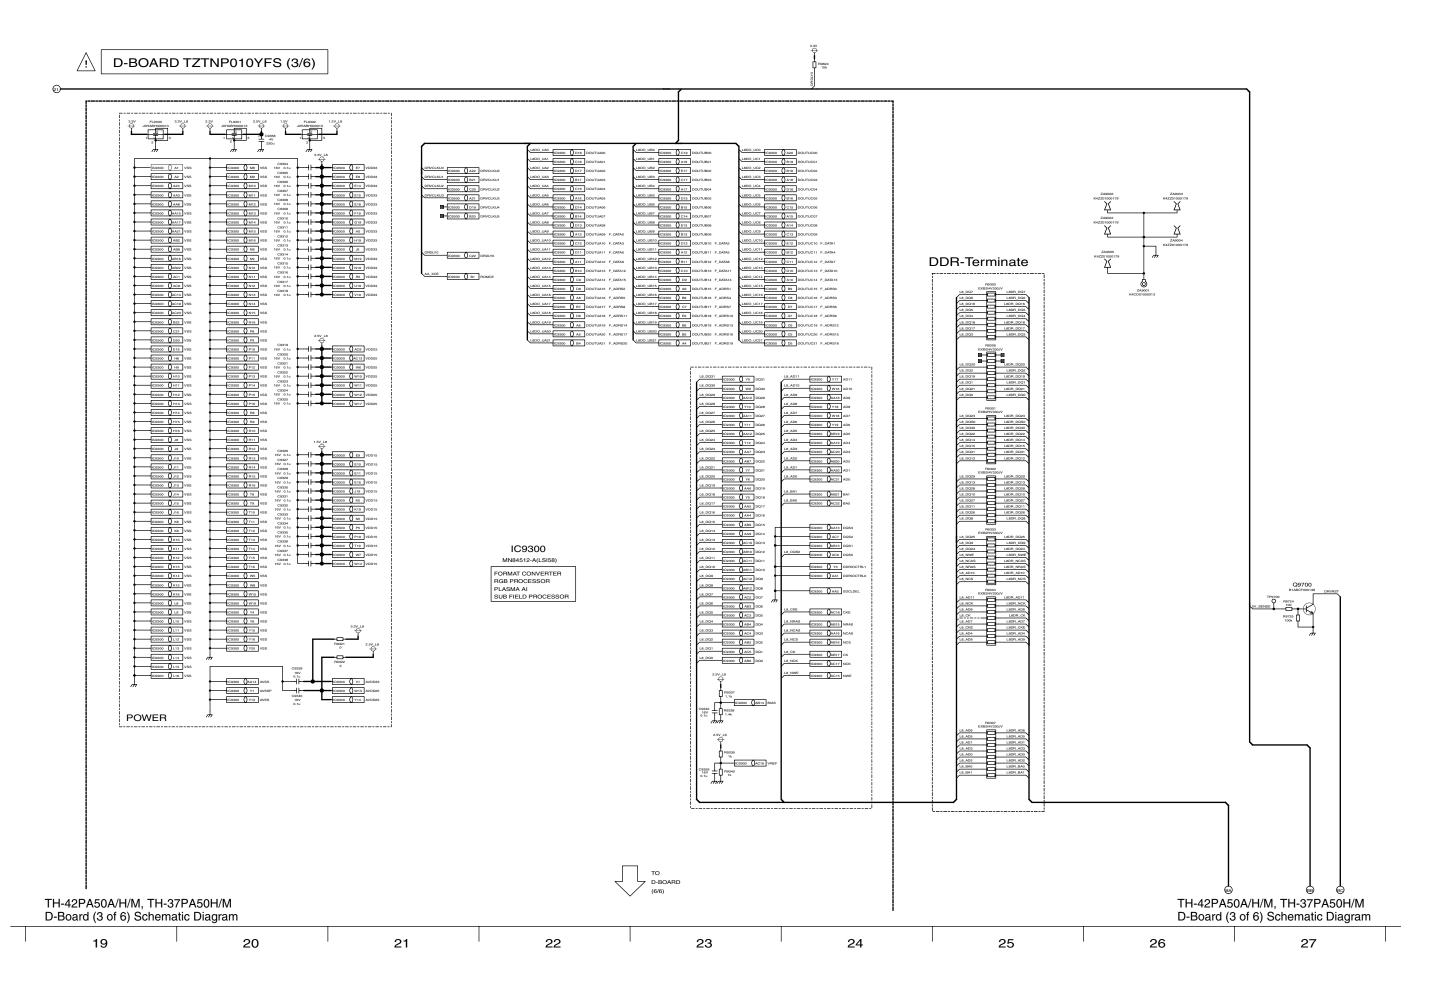


# 14.39. D-Board (4 of 6) Schematic Diagram

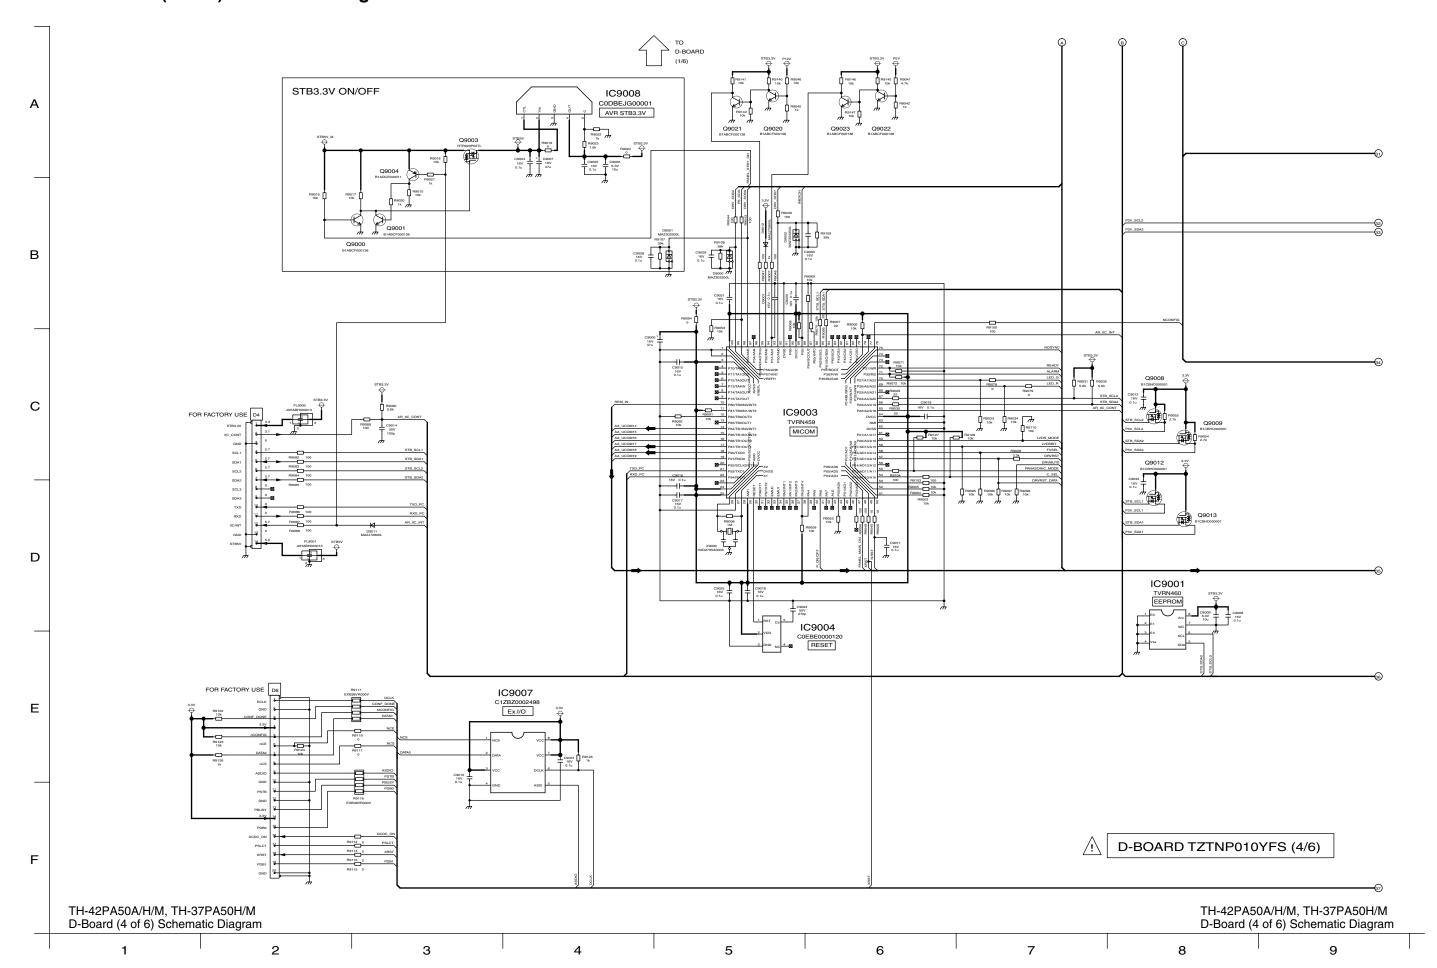


## 14.40. D-Board (5 of 6) Schematic Diagram

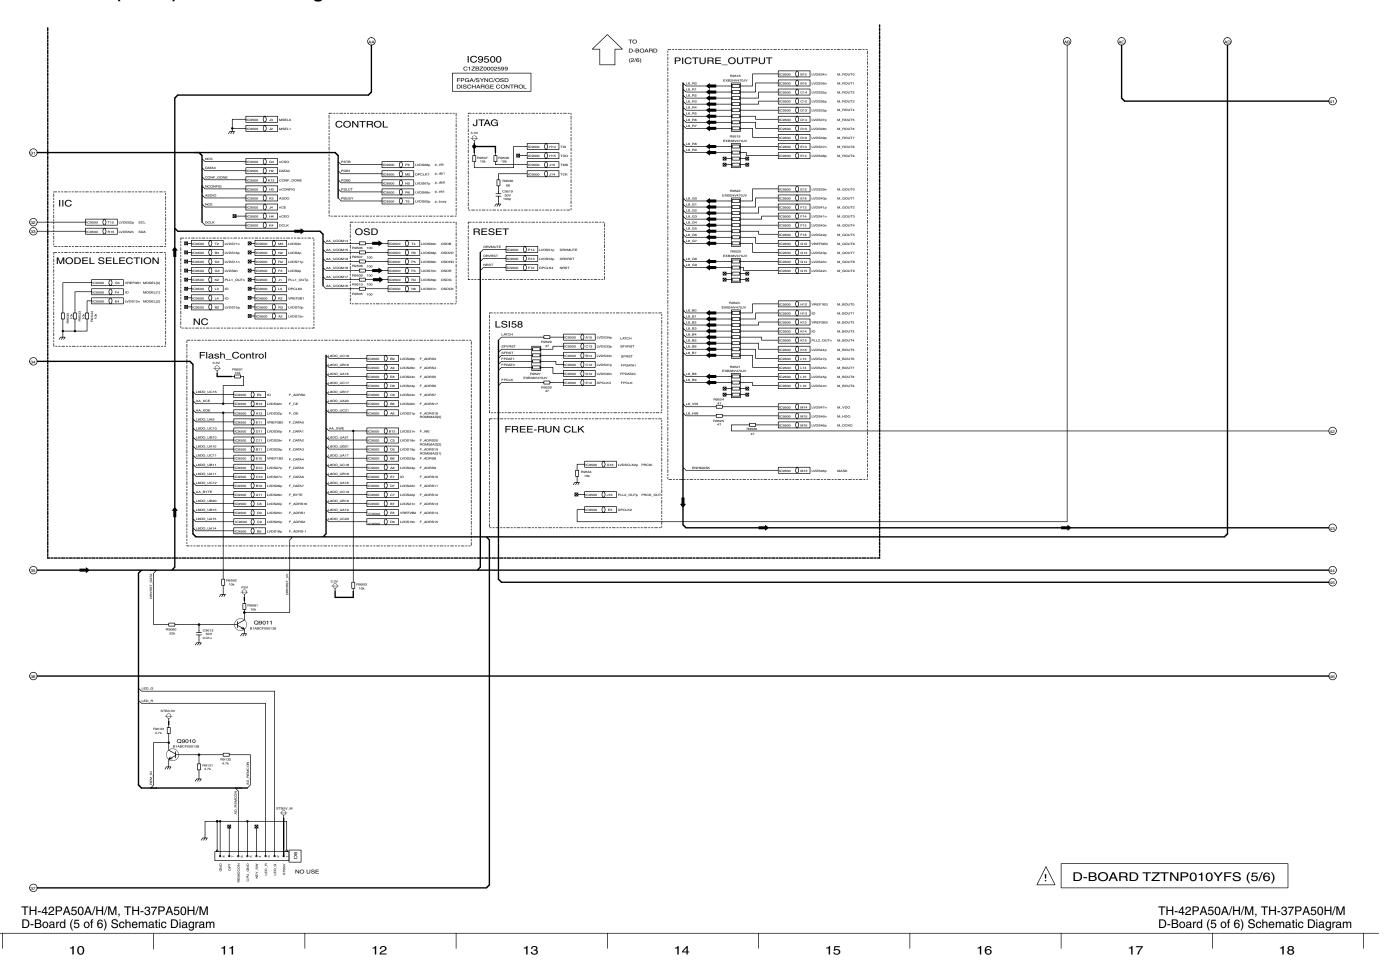


#### 14.41. D-Board (6 of 6) Schematic Diagram

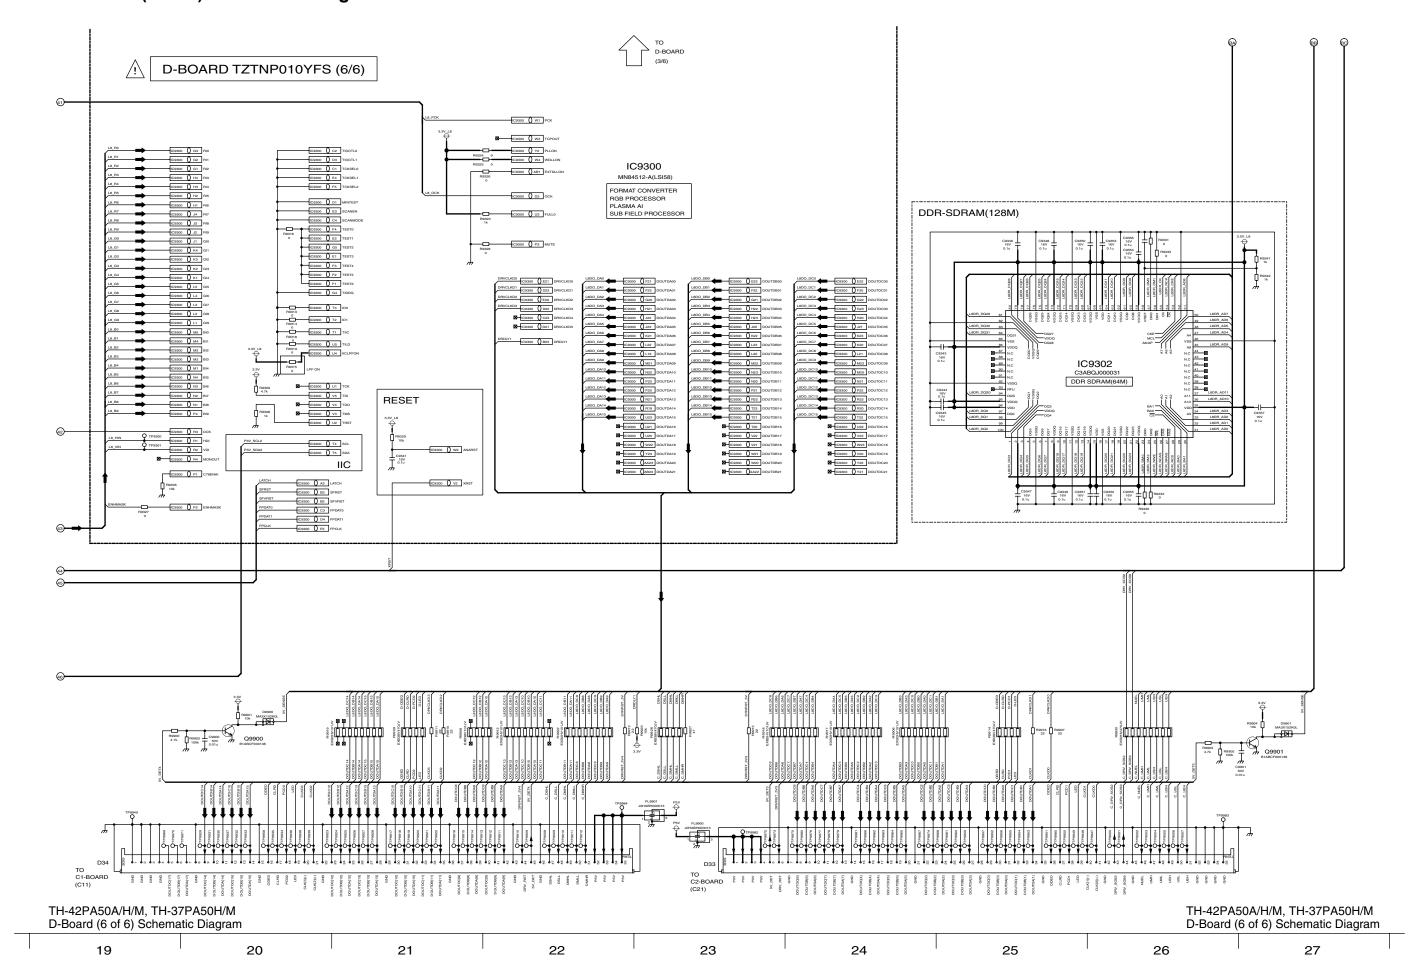


## 14.42. C1 and C2-Board Block Diagram

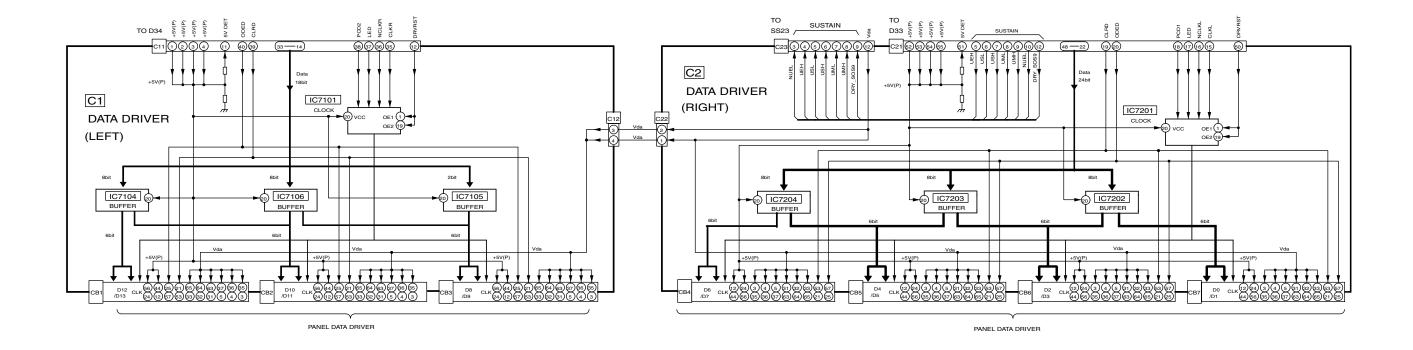


# 14.43. C1-Board (1 of 2) Schematic Diagram (37 inch)

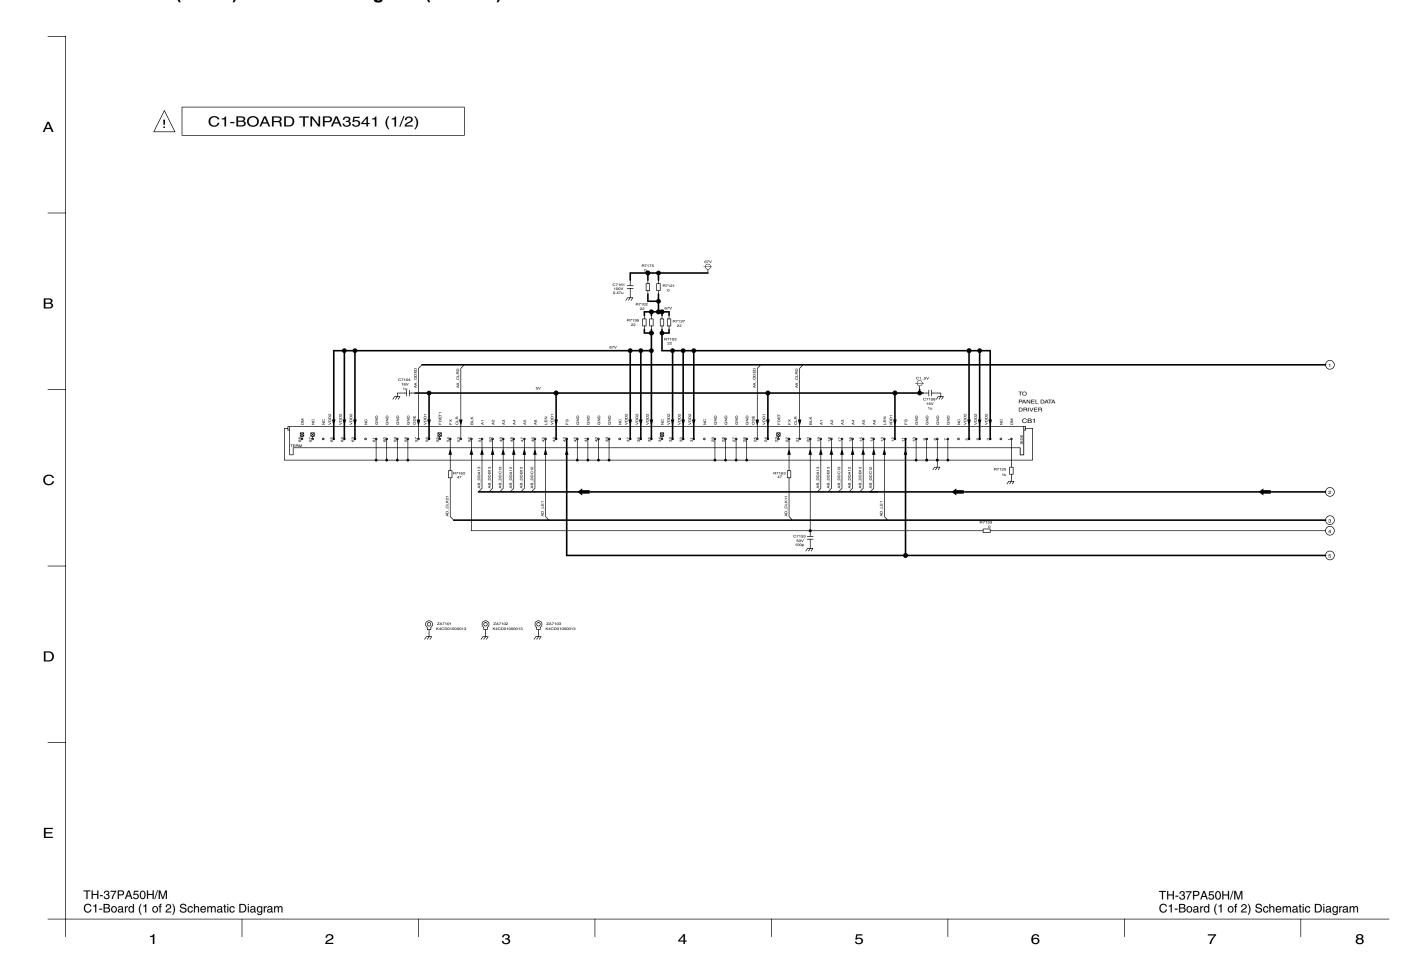


# 14.44. C1-Board (2 of 2) Schematic Diagram (37 inch)

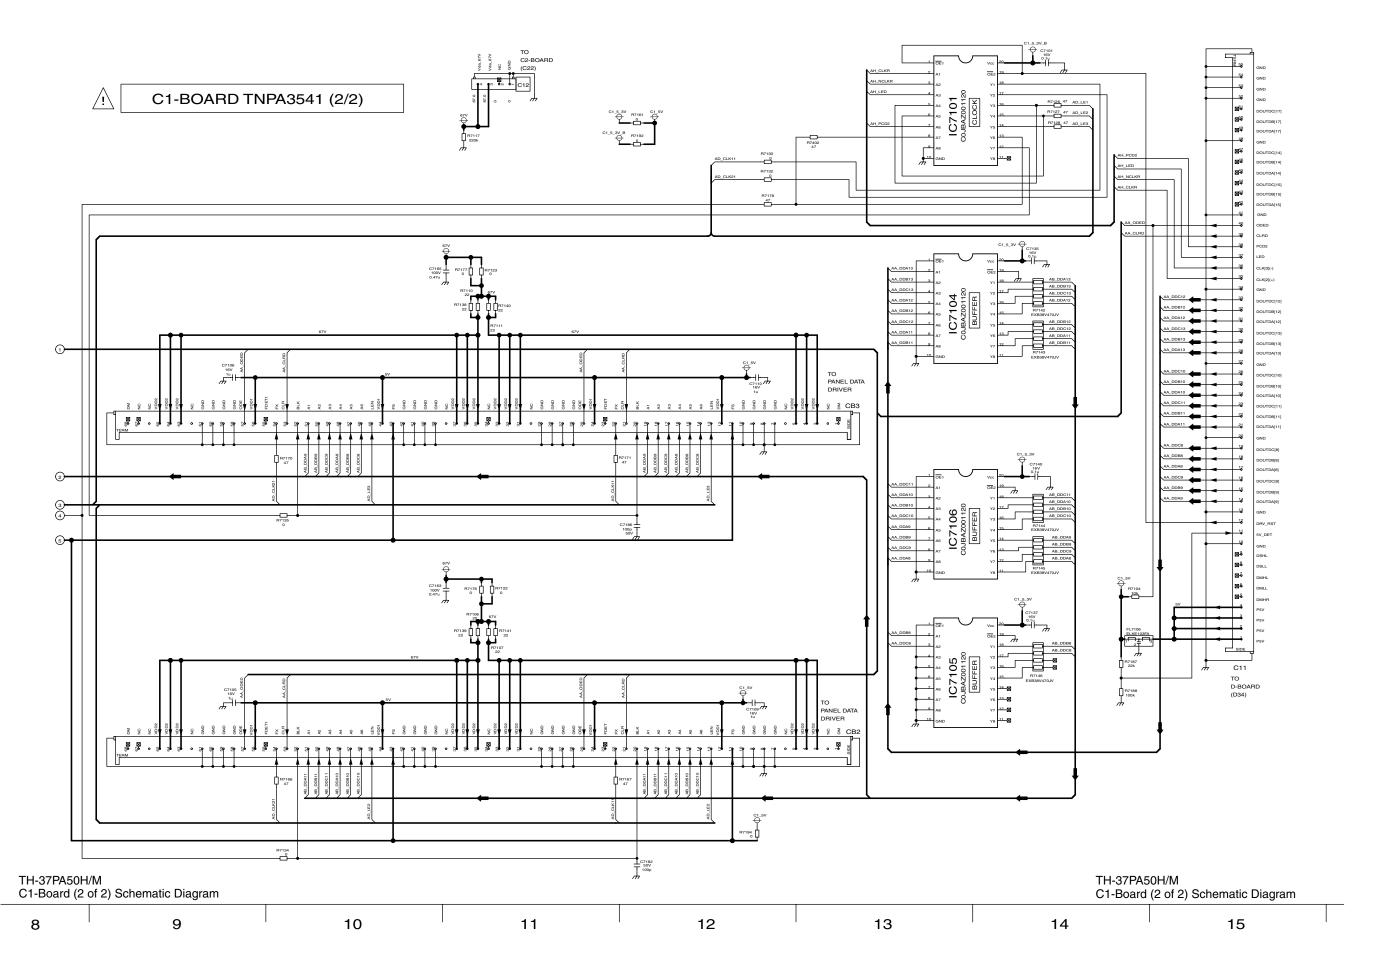


# 14.45. C1-Board (1 of 2) Schematic Diagram (42 inch)

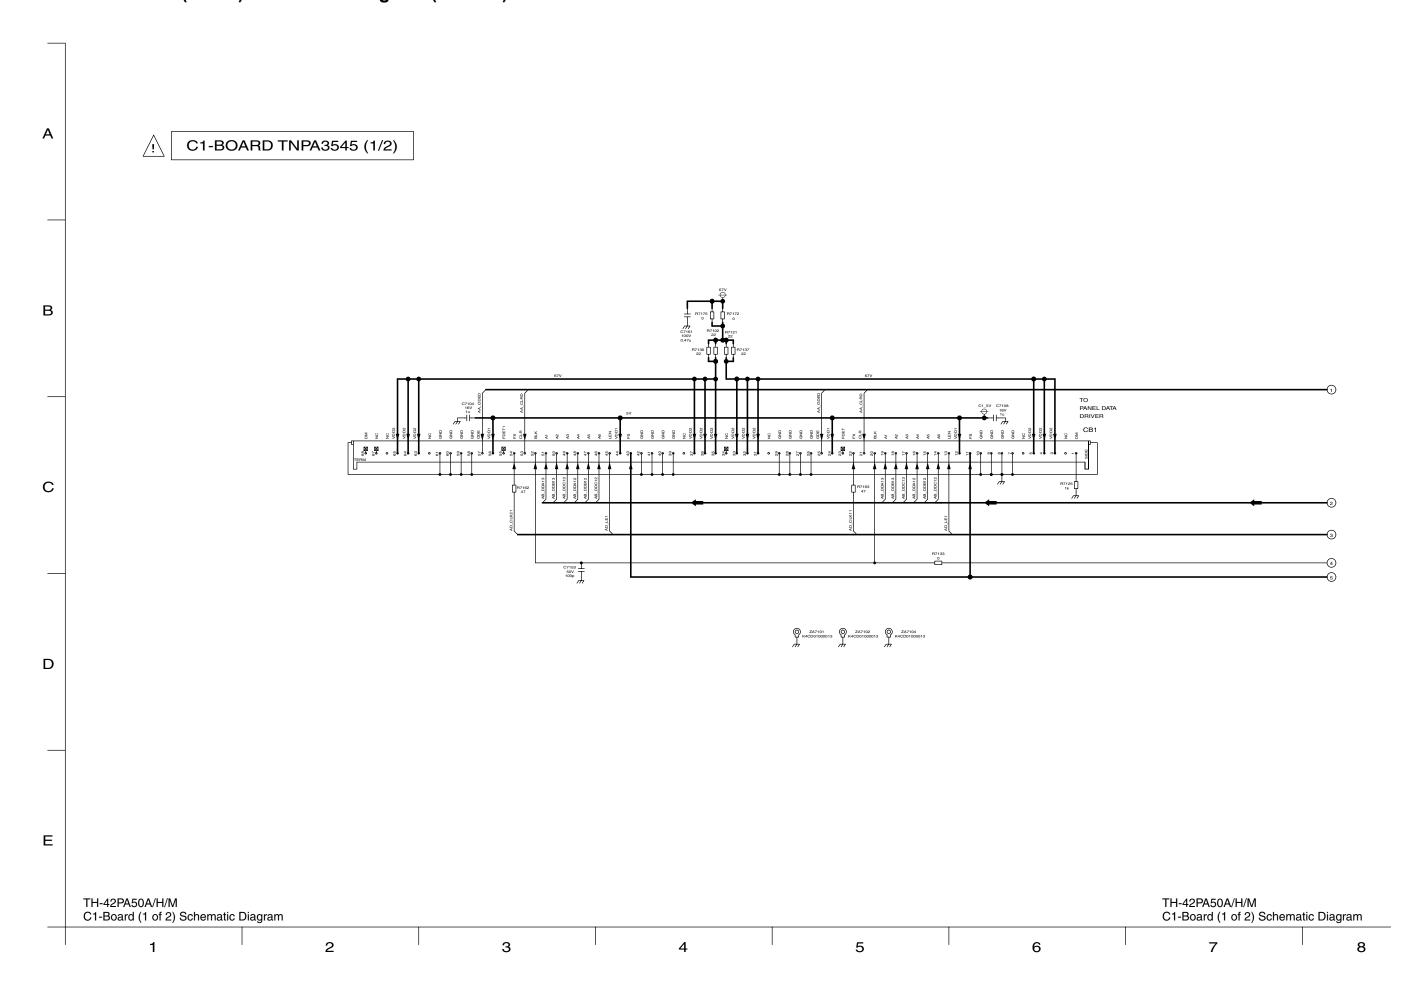


# 14.46. C1-Board (2 of 2) Schematic Diagram (42 inch)

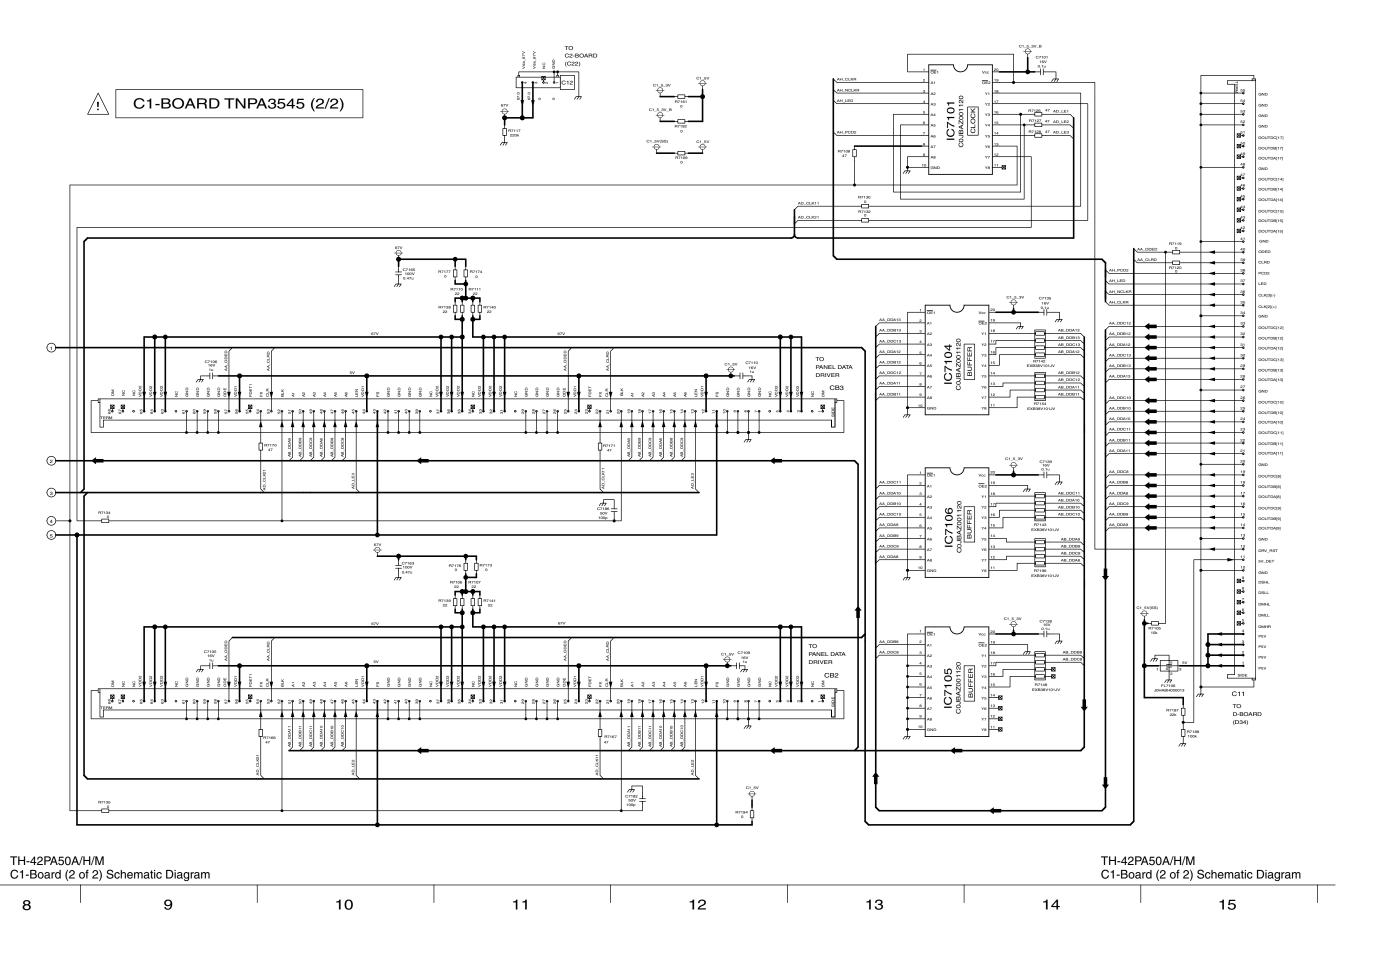


### 14.47. C2-Board (1 of 2) Schematic Diagram (37 inch)

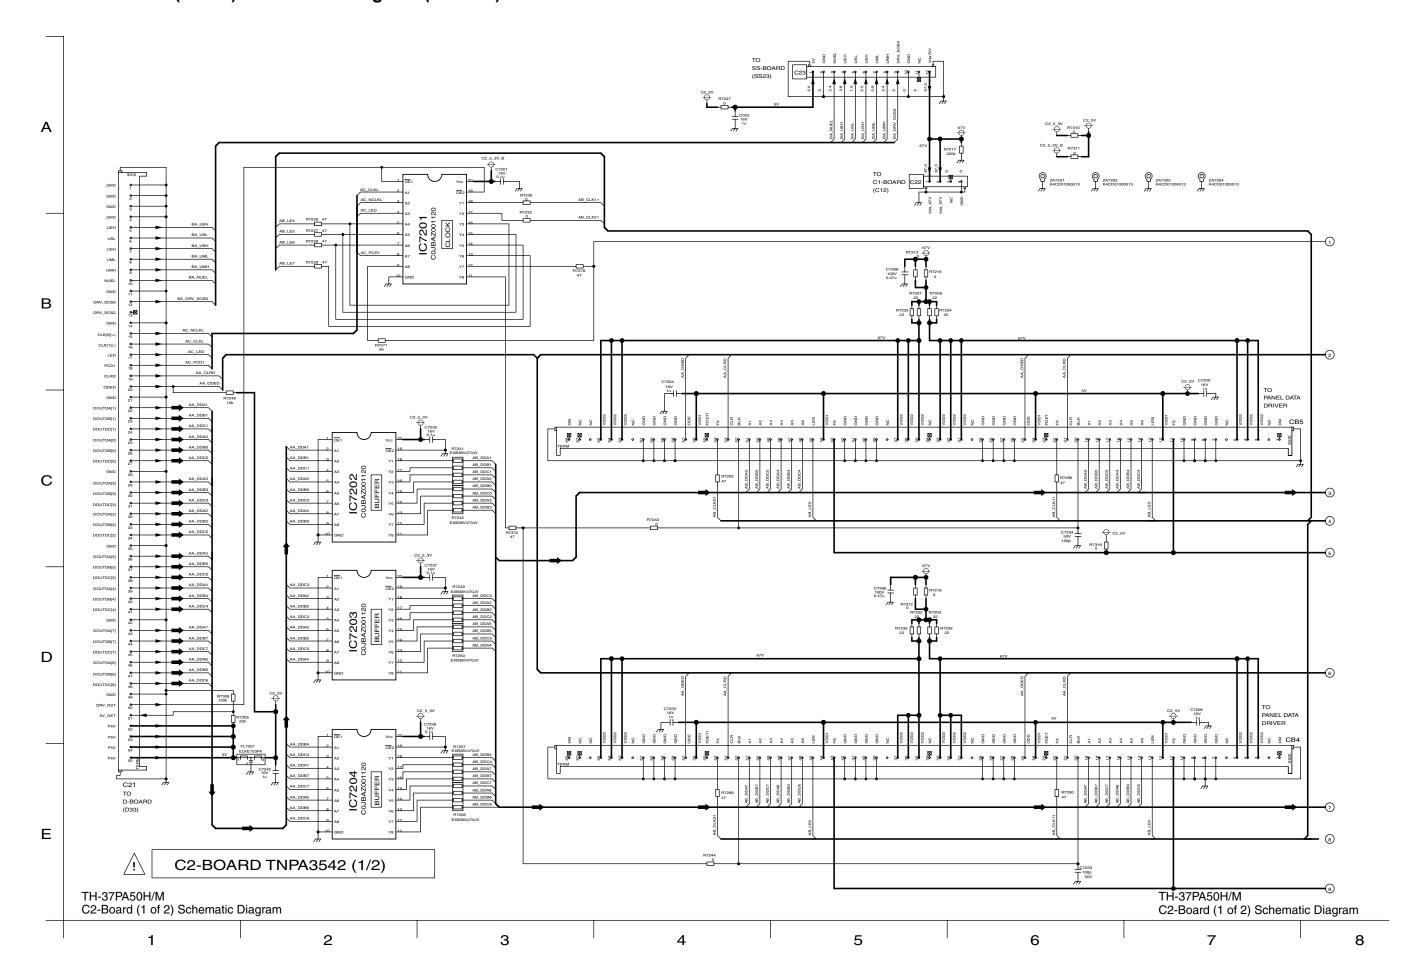


# 14.48. C2-Board (2 of 2) Schematic Diagram (37 inch)

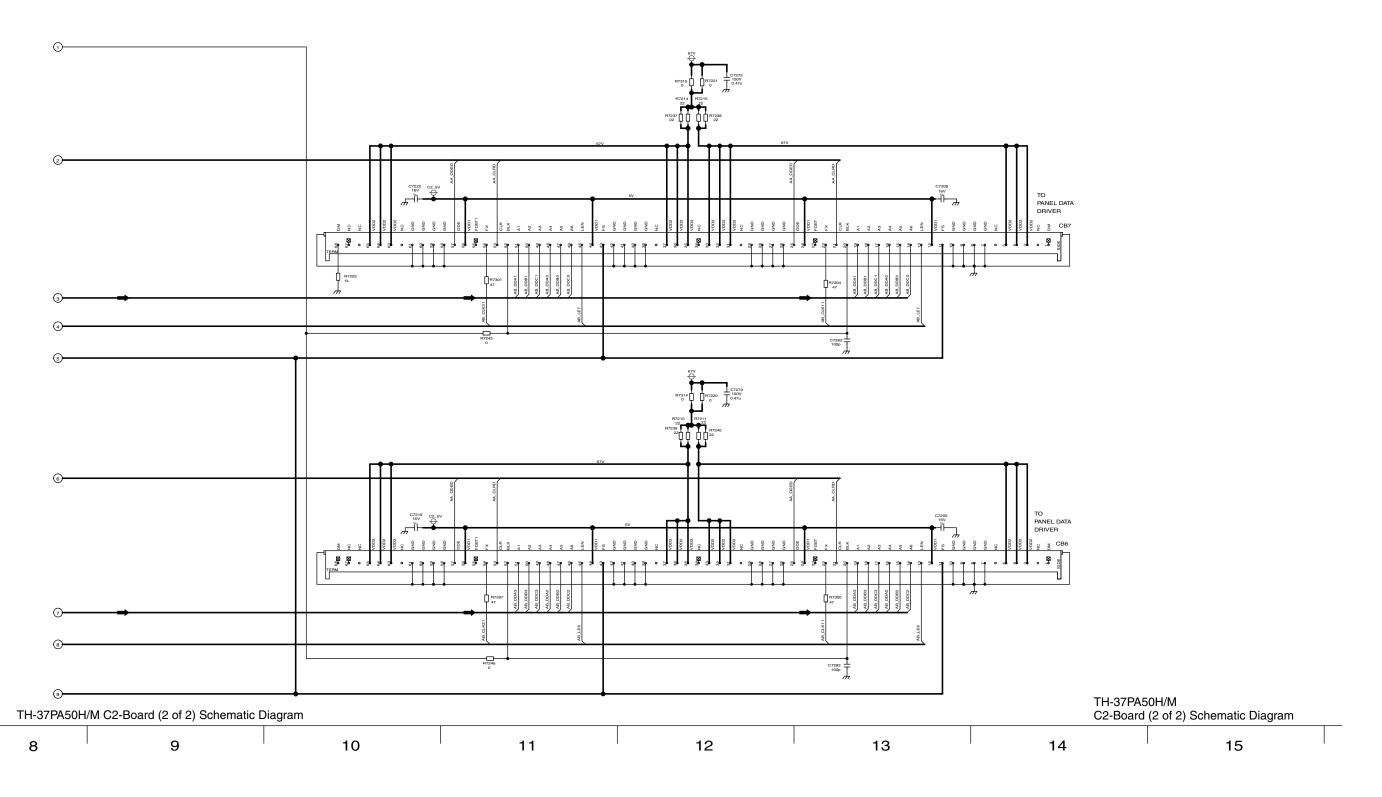


### 14.49. C2-Board (1 of 2) Schematic Diagram (42 inch)

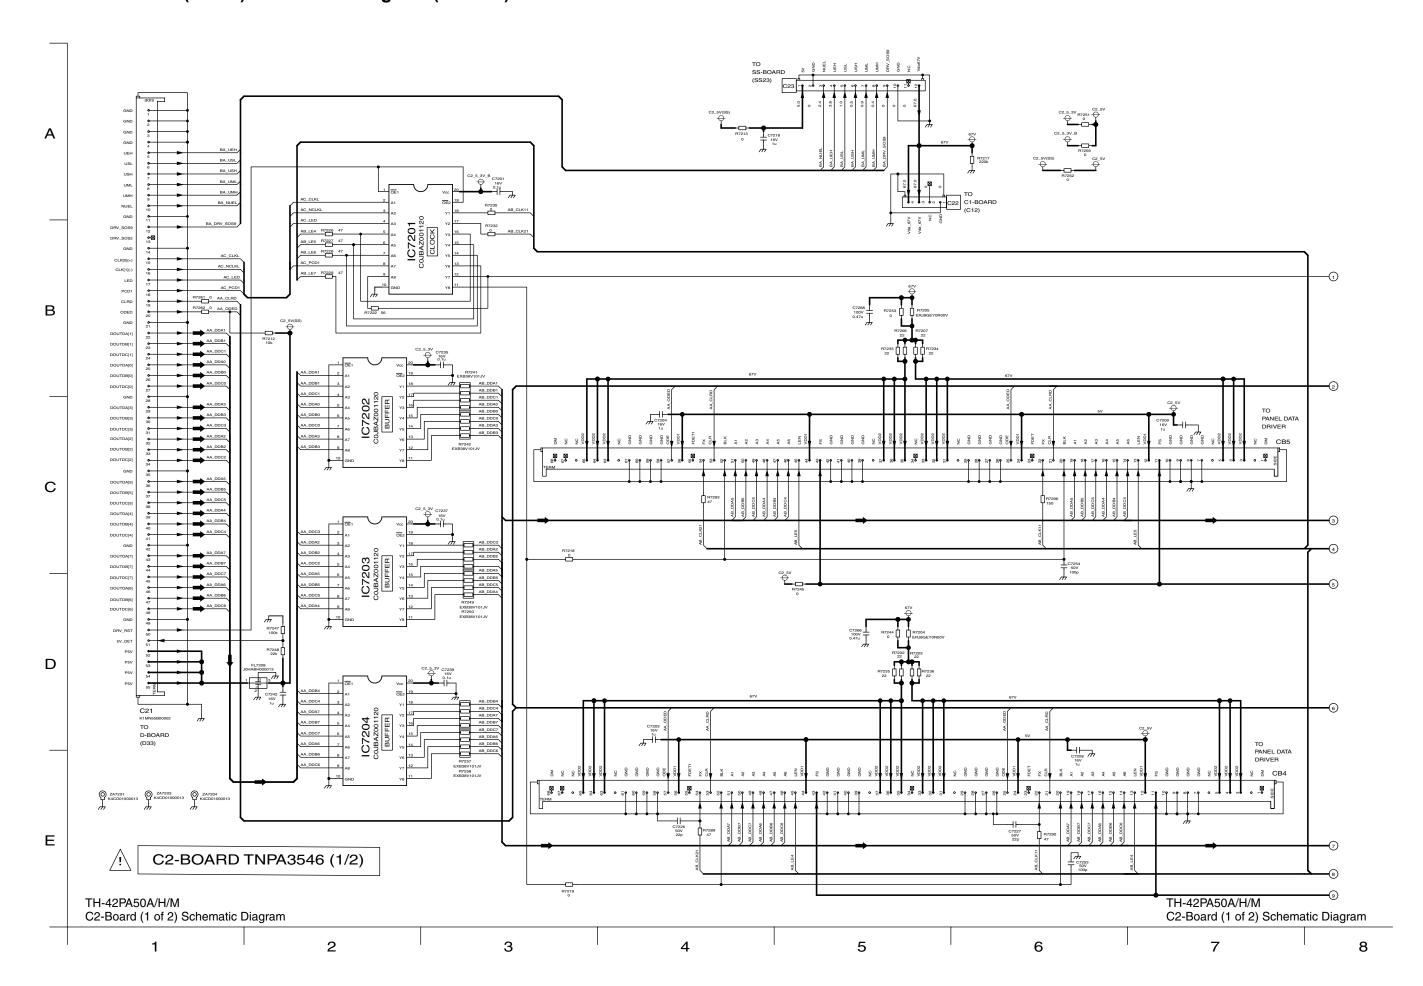


# 14.50. C2-Board (2 of 2) Schematic Diagram (42 inch)

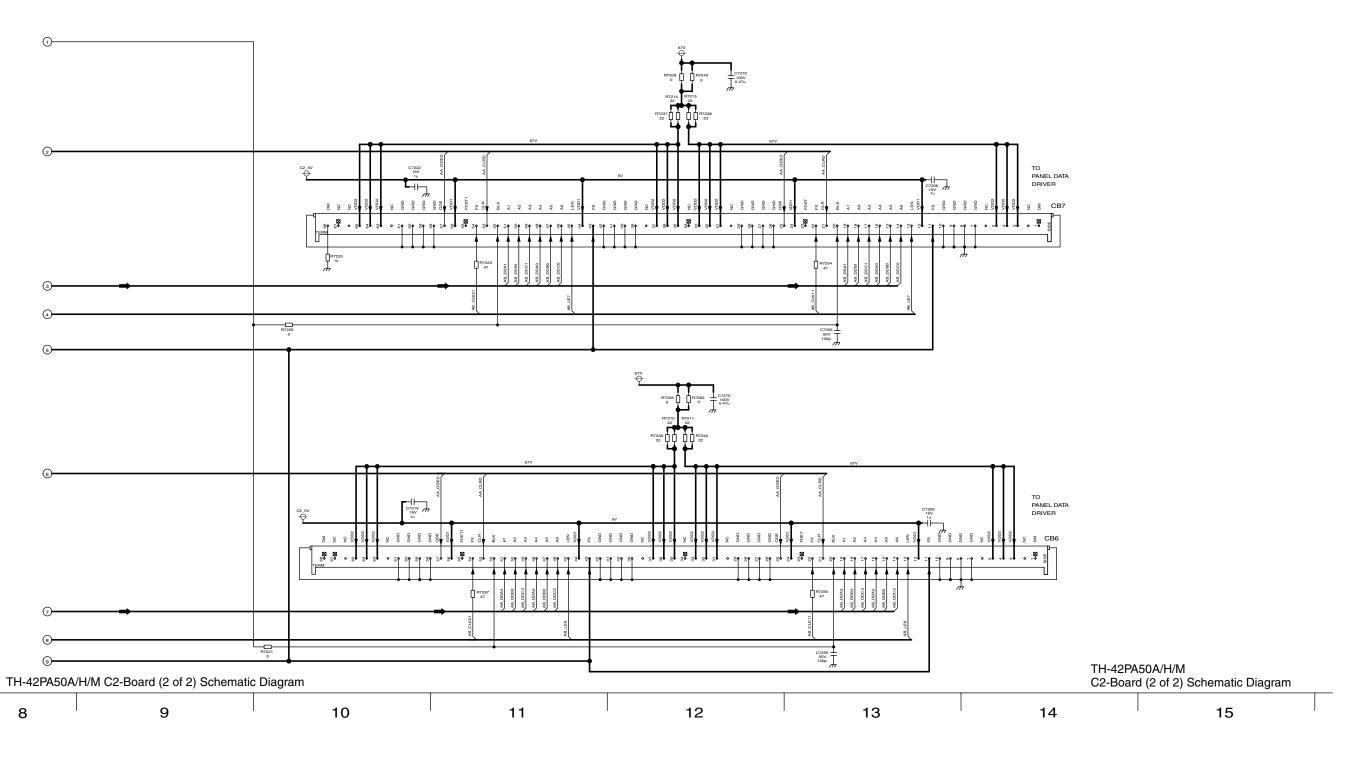


#### 14.51. SC-Board Block Diagram

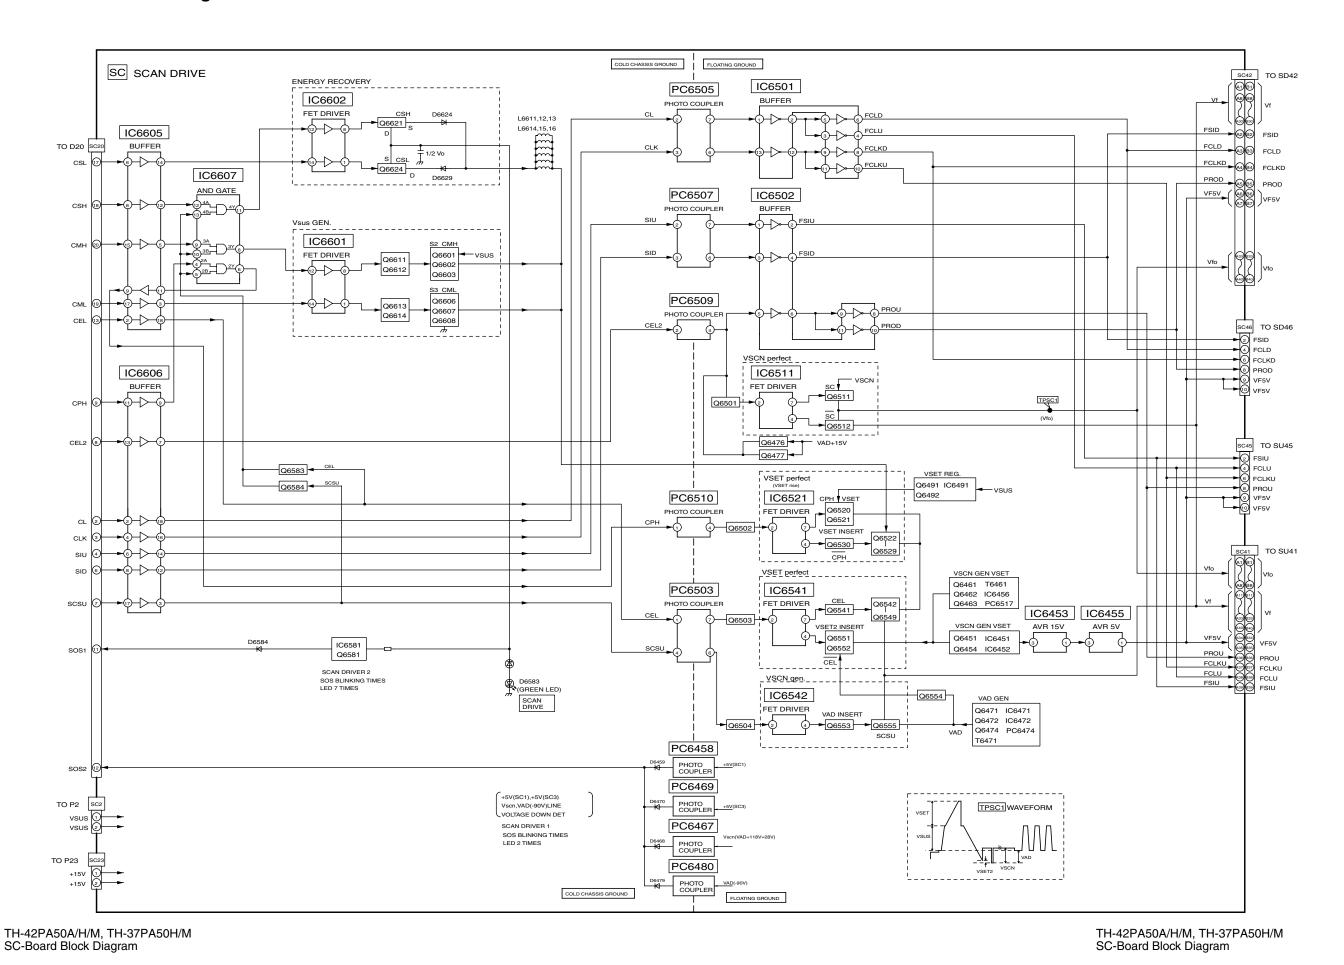


#### 14.52. SC-Board (1 of 2) Schematic Diagram

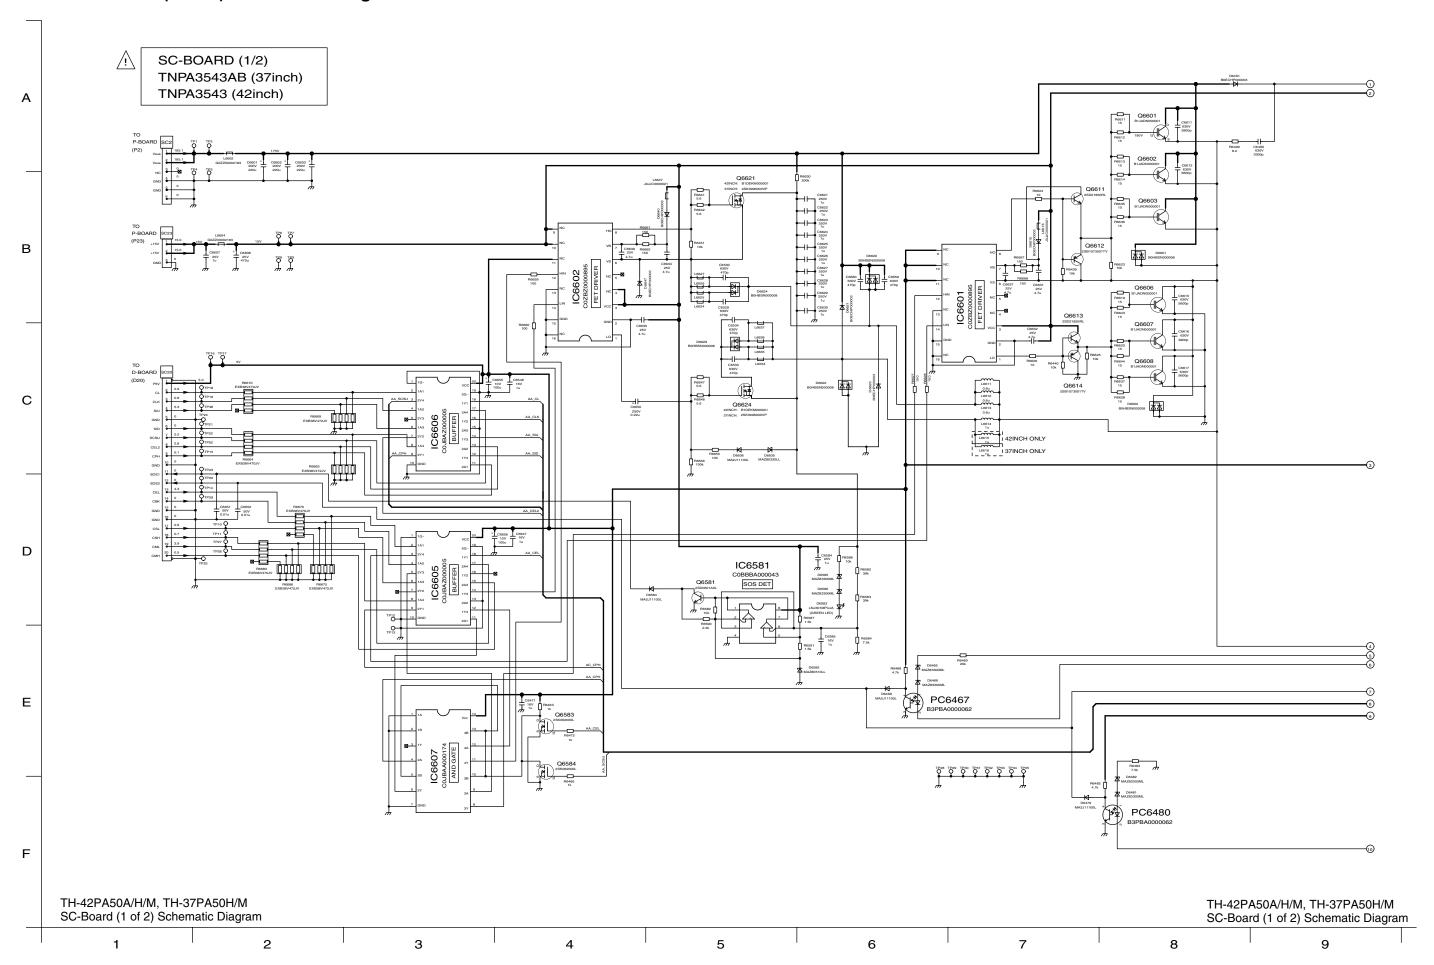

### 14.53. SC-Board (2 of 2) Schematic Diagram

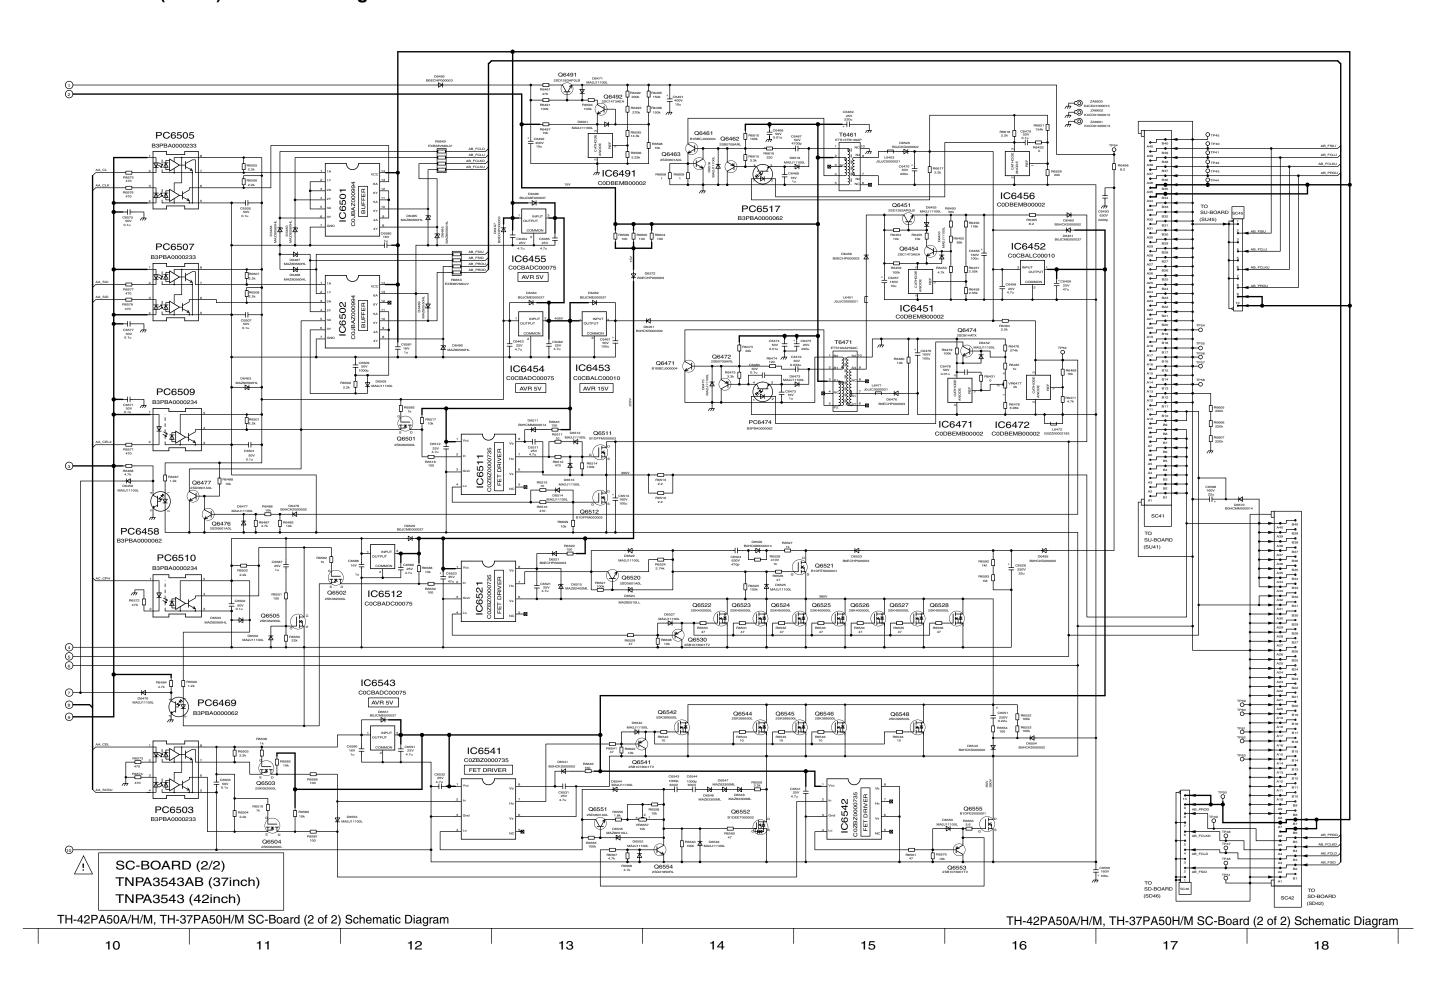


### 14.54. SU-Board Block Diagram

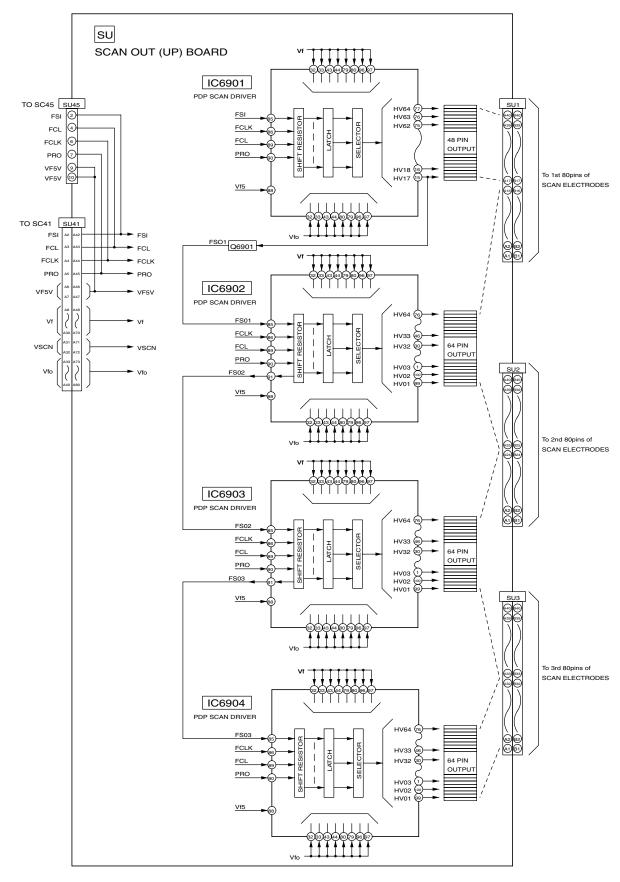


TH-42PA50A/H/M, TH-37PA50H/M SU-Board Block Diagram


### 14.55. SU-Board Schematic Diagram (37 inch)

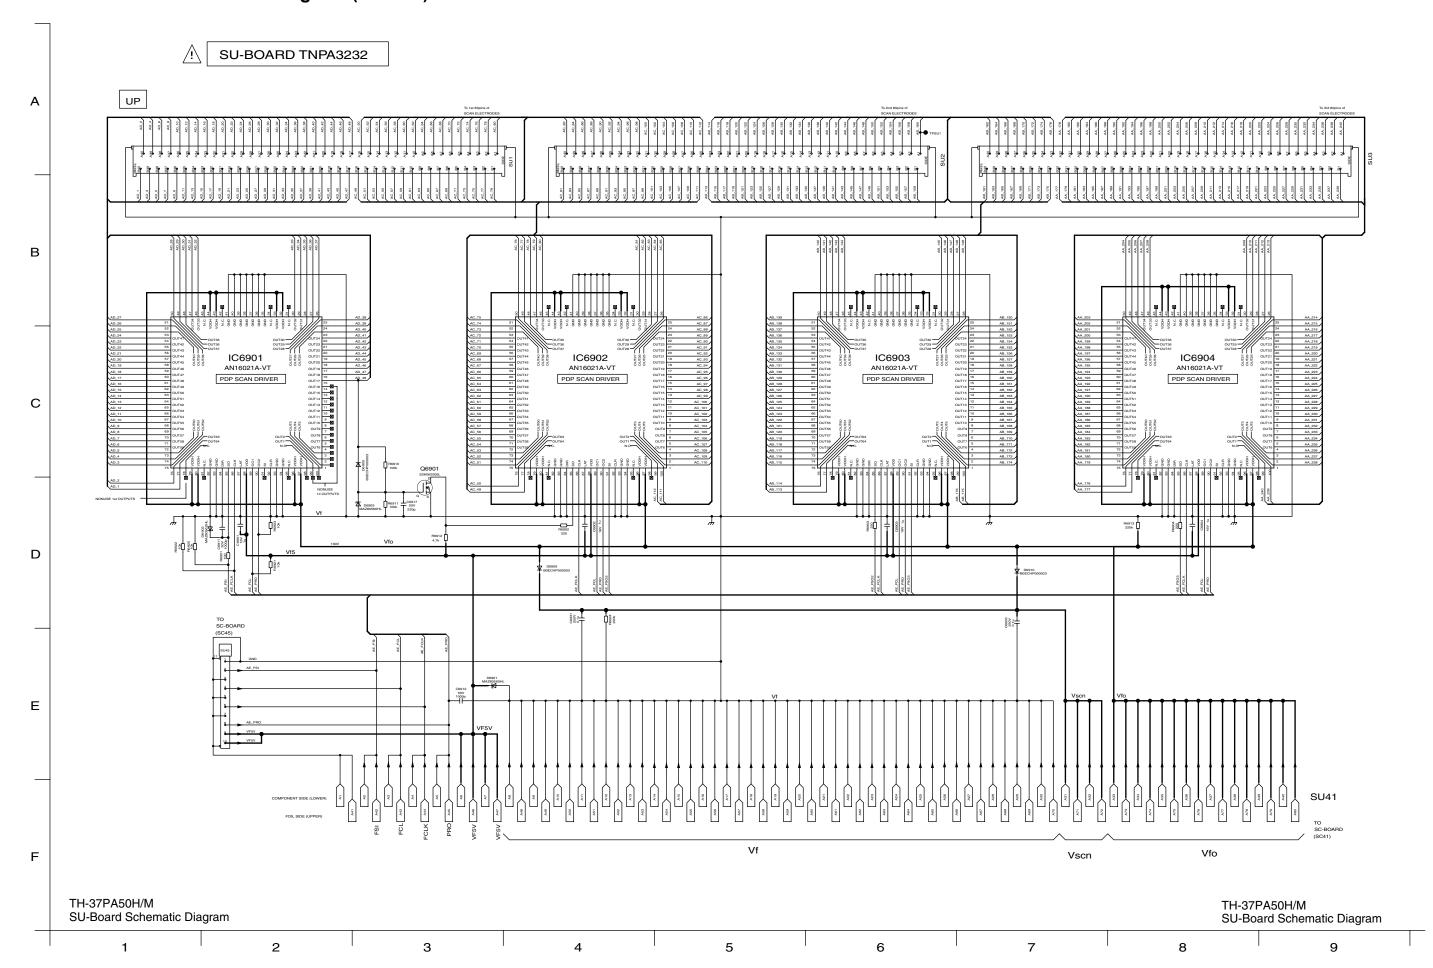

### 14.56. SU-Board Schematic Diagram (42 inch)

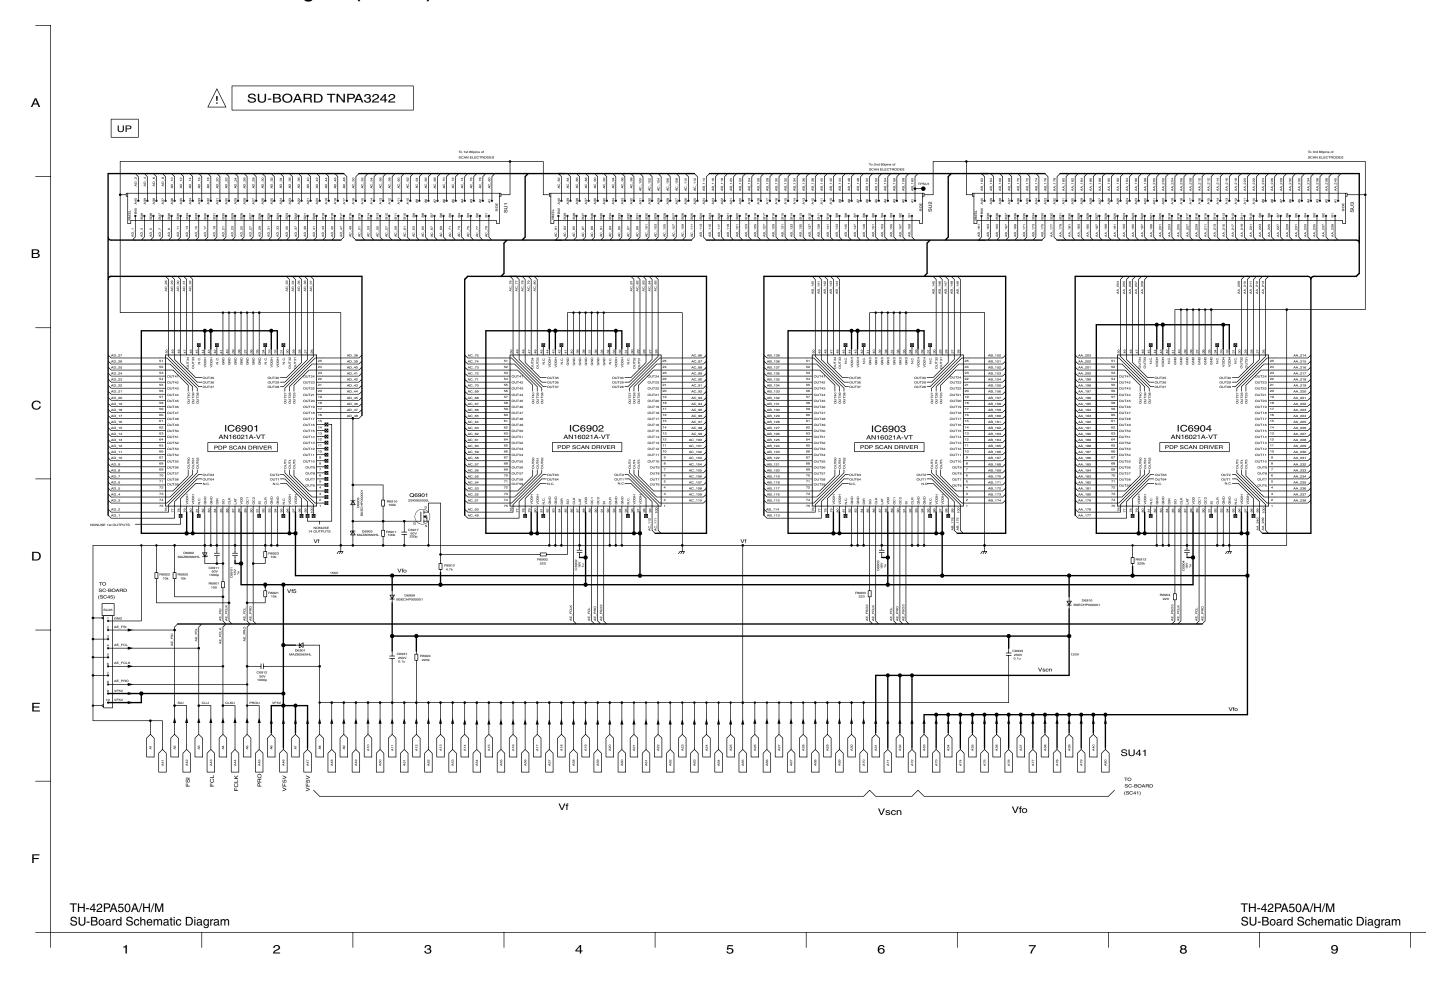


#### 14.57. SD-Board Block Diagram

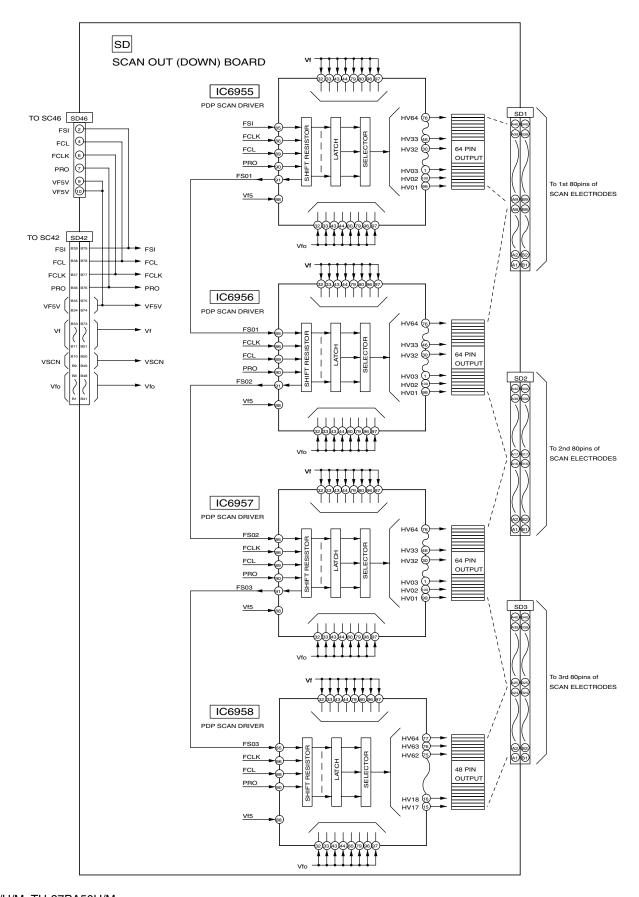


TH-42PA50A/H/M, TH-37PA50H/M SD-Board Block Diagram


#### 14.58. SD-Board Schematic Diagram (37 inch)

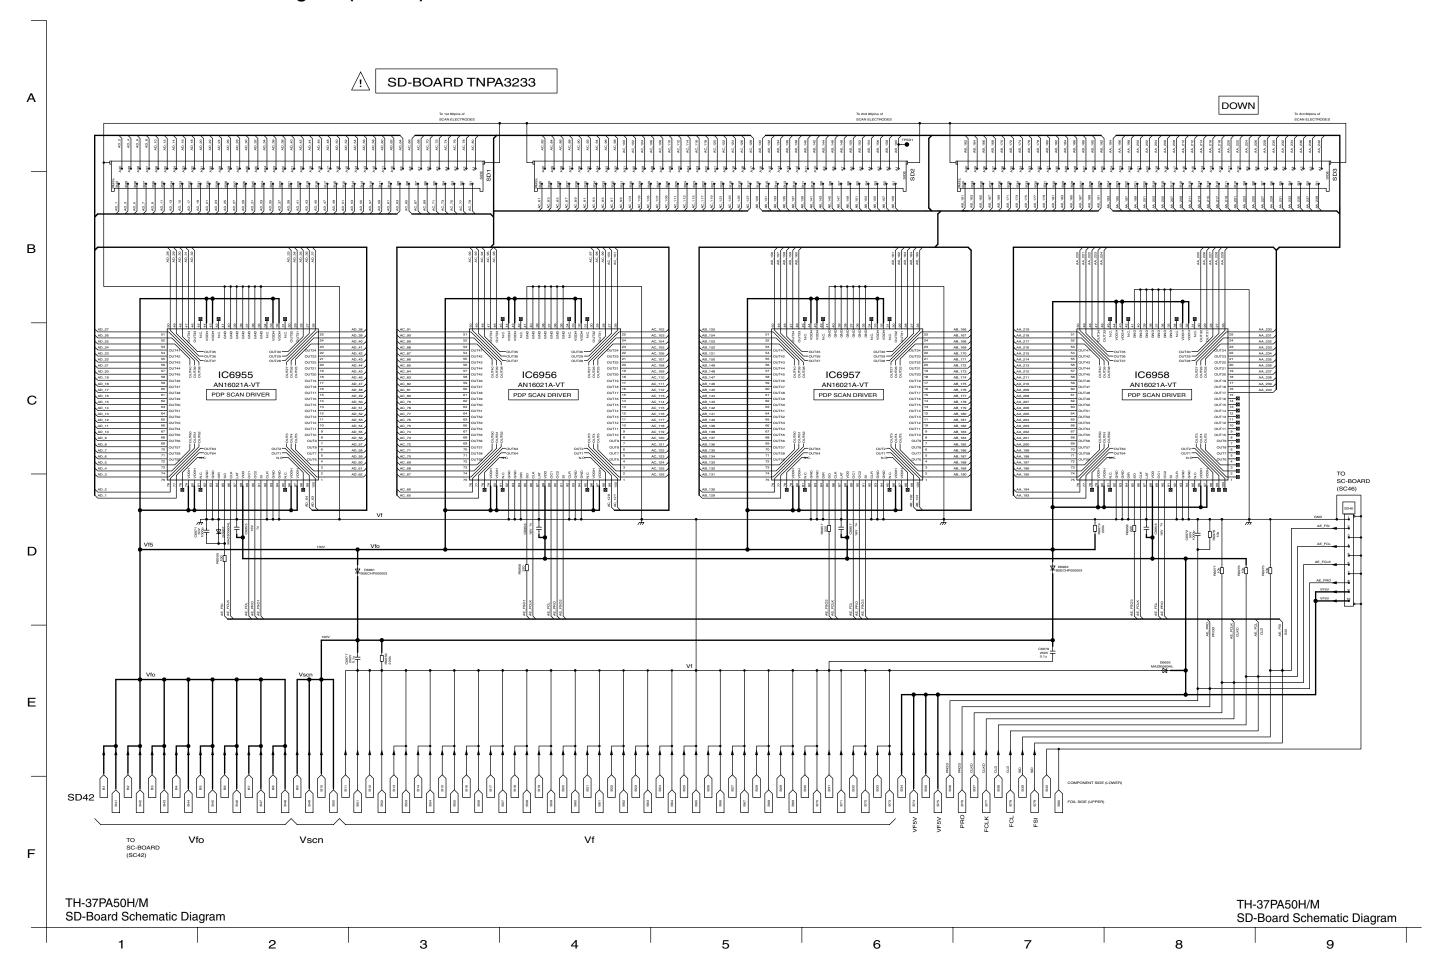

# 14.59. SD-Board Schematic Diagram (42 inch)

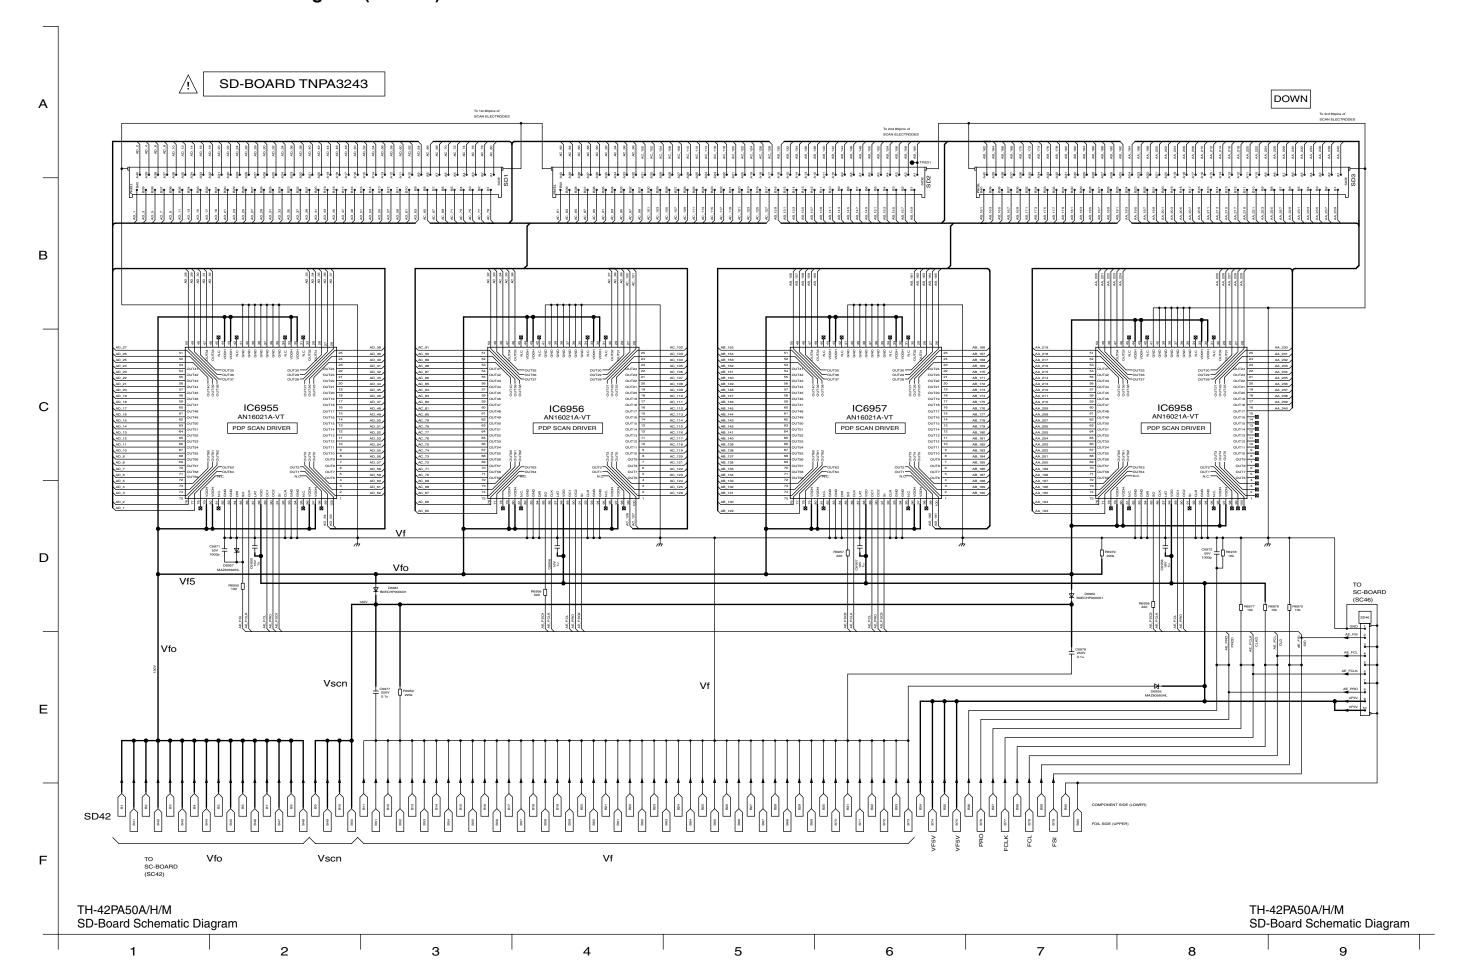


#### 14.60. SS-Board Block Diagram

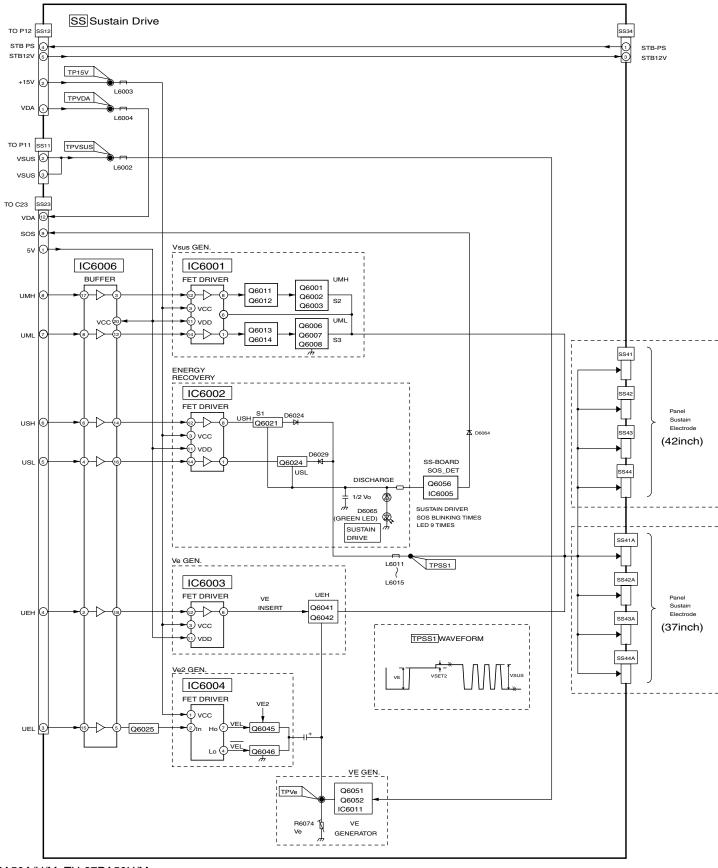

TH-42PA50A/H/M, TH-37PA50H/M SS-Board Block Diagram

TH-42PA50A/H/M, TH-37PA50H/M SS-Board Block Diagram


#### 14.61. SS-Board Schematic Diagram

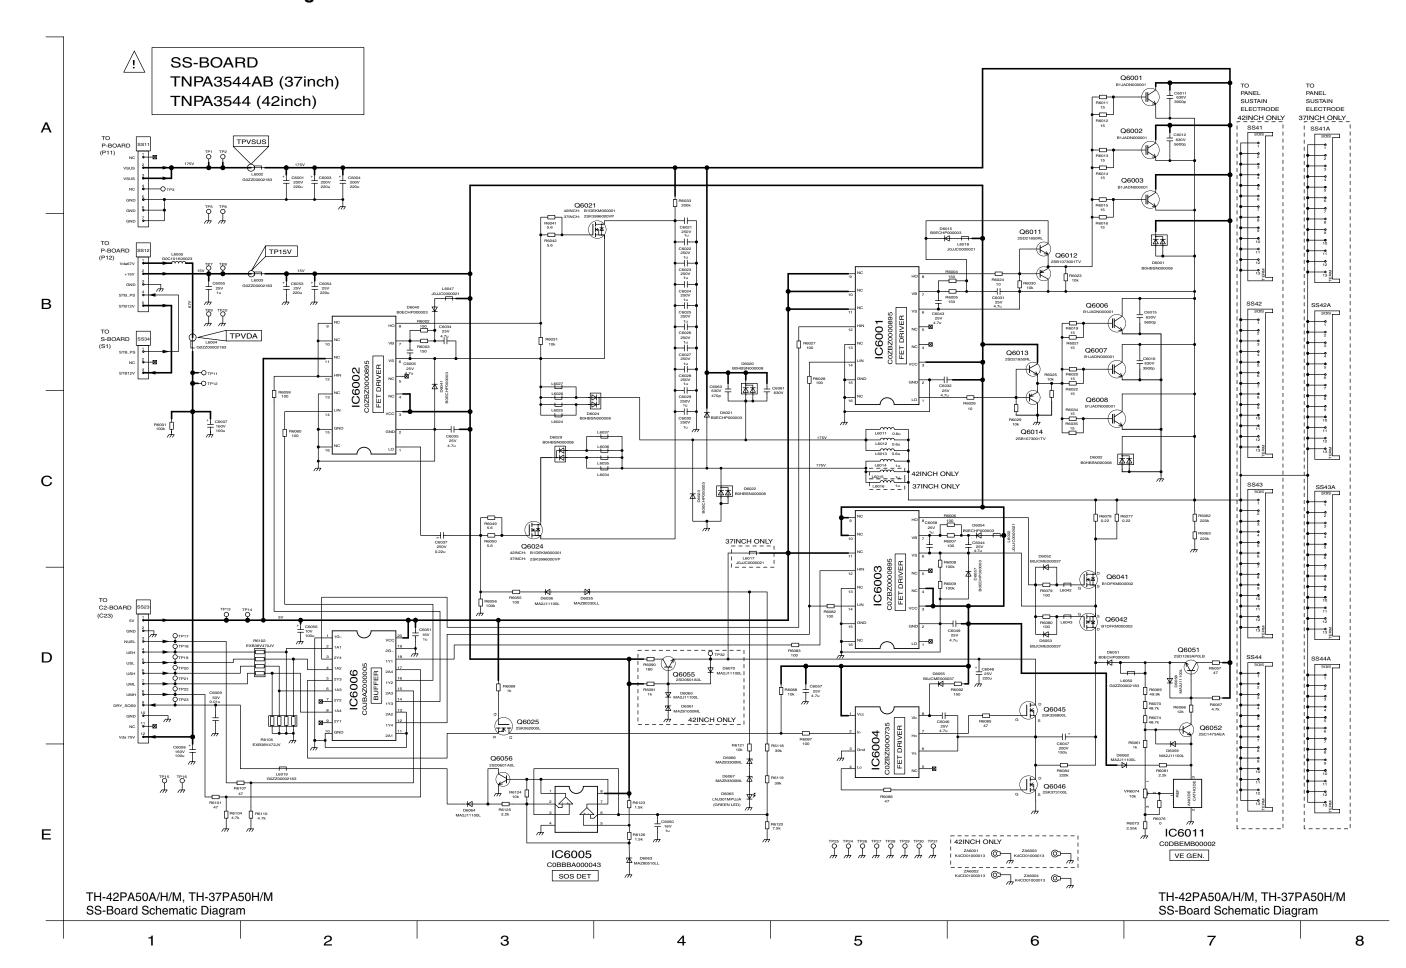


TH-42PA50A / TH-42PA50H / TH-42PA50M / TH-37PA50H / TH-37PA50M

# 15 Parts Location & Mechanical Replacement Parts List


#### 15.1. Parts Location

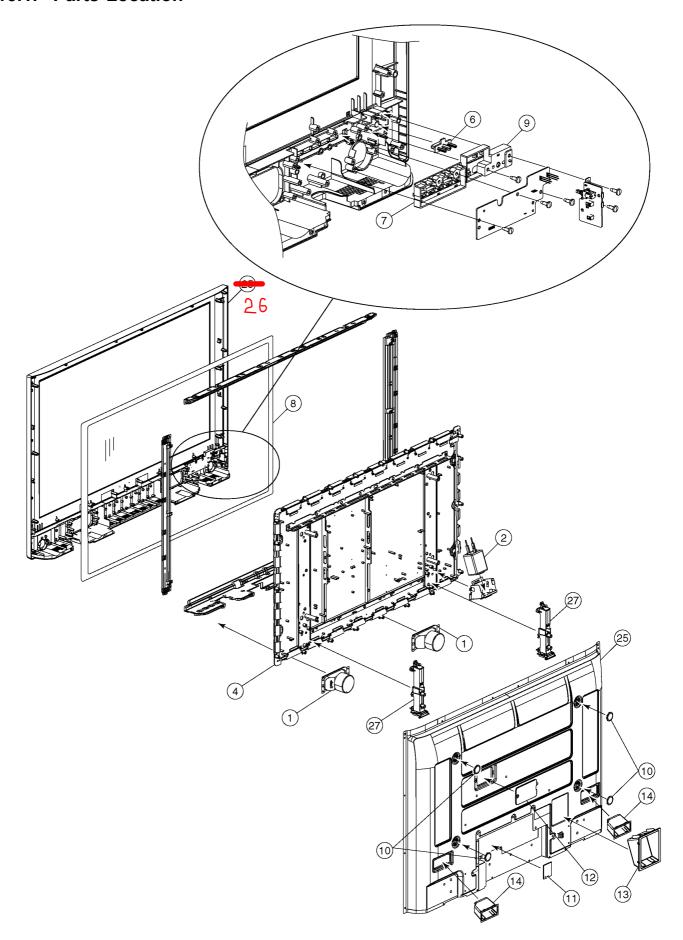


# 15.2. Packing Exploded Views (1)

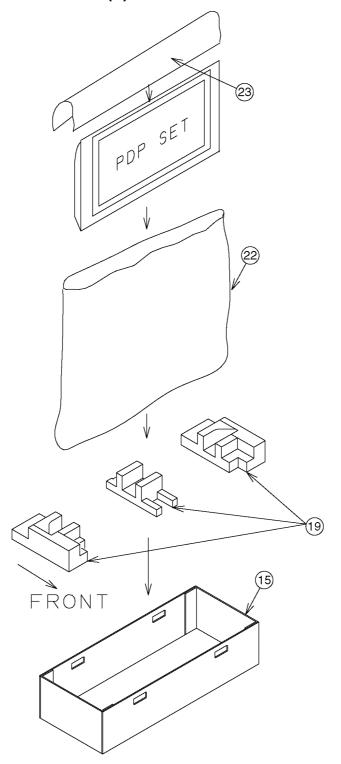

# 15.3. Packing Exploded Views (2)

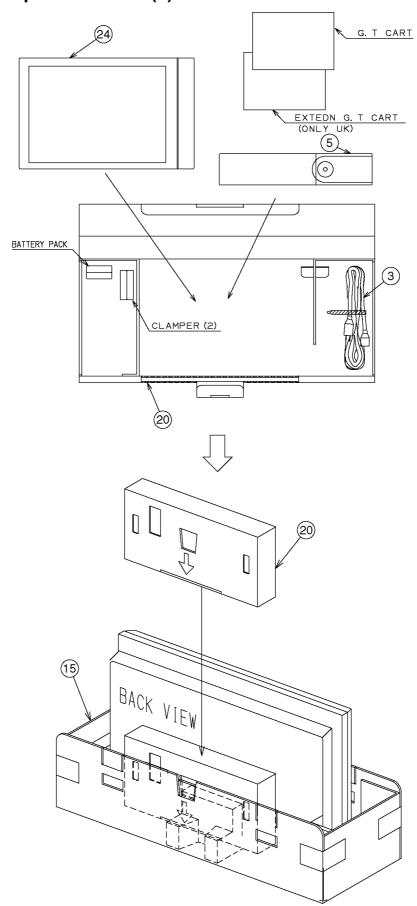

# 15.4. Packing Exploded Views (3)

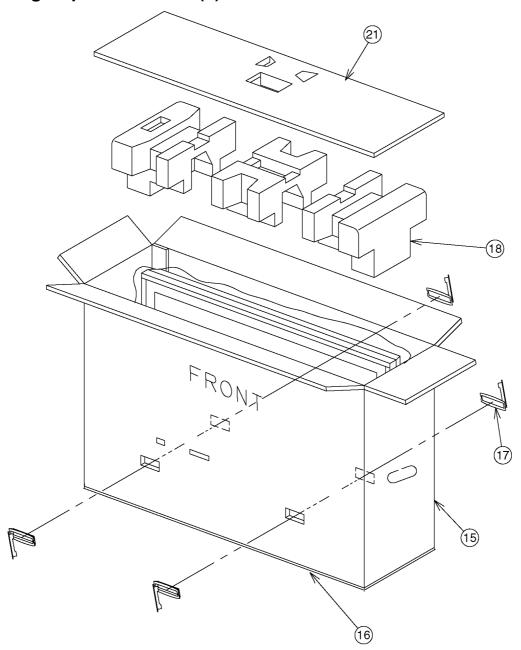

# 15.5. Mechanical Replacement Parts List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
1	EAS12S08A	SPEAKER	2	
	J0KD00000095	FLAT CORE	2	
	J0KG00000042	NOISE FILTER	1	TH-42PA50A
	J2ZZ00000036	RF CABLE	1	TH- 37/42PA50H/M
	K1LB12A00035	RELAY	1	TH-37PA50H/M
	K1YD55000001	55P CONNECTOR	2	
2	К2АН3Н000033	AC-INLET	1	Δ
3	K2CK3DH00029	AC CORD	1	TH-42PA50A A
3	K2CN3DH00006	AC CORD	1	TH-37/42PA50N
3	K2CN3DH00018	AC CORD	1	TH-37/42PA50F
4	MD37S08A1J	PLASMA DISPLAY PANEL	1	TH-37PA50H/M ⚠
4	MD42S08A1JS	PLASMA DISPLAY PANEL	1	TH- 42PA50A/H/M ⚠
5	N2QAJB000154	REMOTE CONTROL	1	
	TBMA149	PANASONIC BADGE (SILVER)	1	
6	TBXA46302	POWER BUTTON	1	
7	TBXA46402	5KEYS BUTTON	1	
	TES4G204	SPRING	1	
	THEL0239	SCREW	1	
	+	SCREW	4	1
	THEL027N	_	+	mrr 2555555
	THEL035N	SCREW	66	TH-37PA50H/M
	THEL035N	SCREW	62	TH- 42PA50A/H/M
	THEL0429	SCREW	23	
	THEL0439	SCREW(FLOCK)	4	
	THTA0379	SCREW	2	
8	TKGA5219	FRONT GLASS	1	TH-37PA50H/M
8	TKGA5262	FRONT GLASS	1	TH- 42PA50A/H/M
9	TKKC5208	PANEL LIGHT	1	
10	TKKL5231	COVER	4	
11	TKKL5306	ADJUSTMENT COVER(SMALL)	1	
12	TKKL5330	ADJUSTMENT COVER(LARGE)	1	
13	TKPA94301	INLET COVER	1	
14	TKRA34802	B/COVER HANDLE	2	TH-37PA50H/M
	TKRA46201	REAR COVER HANDLE	2	TH- 42PA50A/H/M
	TMKG556	SPONGE T/B	2	TH- 42PA50A/H/M
	TMKG560	SPONGE T/B	2	TH-37PA50H/M
	TMKG557	SPONGE L/R	2	TH- 42PA50A/H/M
	TMKG557 TMKG561	SPONGE L/R	2	
				42PA50A/H/M
	TMKG561	SPONGE L/R	2	42PA50A/H/M
	TMKG561 TMM17499	SPONGE L/R CLAMPER	2	42PA50A/H/M
	TMKG561 TMM17499 TMM25401	SPONGE L/R CLAMPER CLAMPER	2 1 5	42PA50A/H/M
	TMKG561 TMM17499 TMM25401 TMM7464-2	SPONGE L/R CLAMPER CLAMPER CLAMPER	2 1 5	42PA50A/H/M
	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047	SPONGE L/R CLAMPER CLAMPER CLAMPER CLAMPER CLAMPER CLAMPER	2 1 5 1	42PA50A/H/M
	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061	SPONGE L/R CLAMPER CLAMPER CLAMPER CLAMPER CLAMPER CLAMPER CLAMPER CLAMPER	2 1 5 1 1 6 5	42PA50A/H/M
	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061 TMME190	SPONGE L/R CLAMPER CLAMPER CLAMPER CLAMPER CLAMPER CLAMPER CLAMPER CLAMPER CLAMPER	2 1 5 1 1 6 5	42PA50A/H/M
	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061 TMME190 TMME199	SPONGE L/R CLAMPER	2 1 5 1 1 6 5 2	42PA50A/H/M
	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061 TMME190 TMME199 TMME206	SPONGE L/R CLAMPER	2 1 5 1 1 6 5 2 2	42PA50A/H/M
	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061 TMME190 TMME199 TMME206 TMME226	SPONGE L/R CLAMPER	2 1 5 1 1 6 5 2 2 2	42PA50A/H/M TH-37PA50H/M
	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061 TMME190 TMME199 TMME206 TMME226 TPCB77301	SPONGE L/R CLAMPER	2 1 5 1 1 6 5 2 2 2 2 1	42PA50A/H/M TH-37PA50H/M  TH-42PA50A ⚠
15	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061 TMME190 TMME199 TMME206 TMME226 TPCB77301 TPCB77302	SPONGE L/R CLAMPER CARTON BOX TOP	2 1 5 1 1 6 5 2 2 2 2 1 1	42PA50A/H/M TH-37PA50H/M  TH-42PA50A ⚠ TH-42PA50A ⚠
15	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061 TMME190 TMME199 TMME206 TMME226 TPCB77301	SPONGE L/R CLAMPER	2 1 5 1 1 6 5 2 2 2 2 1	42PA50A/H/M TH-37PA50H/M  TH-42PA50A ⚠ TH-42PA50A ⚠
15 15	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061 TMME190 TMME199 TMME206 TMME226 TPCB77301 TPCB77302	SPONGE L/R CLAMPER CARTON BOX TOP	2 1 5 1 1 6 5 2 2 2 2 1 1	42PA50A/H/M TH-37PA50H/M TH-37PA50H/M  TH-42PA50A ⚠ TH-42PA50H ⚠ TH-42PA50M ⚠
15 15 15	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061 TMME190 TMME199 TMME206 TMME226 TPCB77301 TPCB77302 TPCB77303	SPONGE L/R CLAMPER CARTON BOX TOP CARTON BOX TOP	2 1 5 1 1 6 5 2 2 2 2 1 1 1	42PA50A/H/M TH-37PA50H/M TH-42PA50A ⚠ TH-42PA50A ⚠ TH-42PA50M ⚠ TH-42PA50H ⚠
15 15 15 15	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061 TMME190 TMME199 TMME206 TMME226 TPCB77301 TPCB77302 TPCB77303 TPCB77602	SPONGE L/R CLAMPER CARTON BOX TOP CARTON BOX TOP CARTON BOX TOP	2 1 5 1 1 6 5 2 2 2 2 1 1 1	42PA50A/H/M TH-37PA50H/M TH-42PA50A ⚠ TH-42PA50A ⚠ TH-42PA50M ⚠ TH-42PA50H ⚠
15 15 15 15 16	TMKG561 TMM17499 TMM25401 TMM7464-2 TMM7468-1 TMME047 TMME061 TMME190 TMME199 TMME206 TMME226 TPCB77301 TPCB77302 TPCB77303 TPCB77602 TPCB77603	SPONGE L/R CLAMPER CARTON BOX TOP CARTON BOX TOP CARTON BOX TOP CARTON BOX TOP	2 1 5 1 1 6 5 2 2 2 1 1 1 1 1	42PA50A/H/M TH-37PA50H/M TH-42PA50A ⚠ TH-42PA50H ⚠ TH-42PA50H ⚠ TH-37PA50H ⚠ TH-37PA50H ⚠
15 15 15 15 16	TMKG561  TMM17499  TMM25401  TMM7464-2  TMM7468-1  TMME047  TMME061  TMME190  TMME199  TMME206  TMME226  TPCE77301  TPCE77302  TPCE77303  TPCE77602  TPCE77603  TPCE77701  TPCE778801	SPONGE L/R CLAMPER CARTON BOX TOP CARTON BOX BOTTOM	2 1 5 1 1 6 5 2 2 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	42PA50A/M  TH-37PA50H/M  TH-42PA50A ⚠  TH-42PA50M ⚠  TH-42PA50M ⚠  TH-37PA50H ⚠  TH-37PA50H/M  TH-37PA50H/M
15 15 15 15 16 16	TMKG561  TMM17499  TMM25401  TMM7464-2  TMM7468-1  TMME047  TMME061  TMME199  TMME296  TMME226  TPCE77301  TPCE77302  TPCE77303  TPCE77702  TPCE77303  TPCE77602  TPCE77701  TPCE778801  TPCE778801	SPONGE L/R CLAMPER CARTON BOX TOP CARTON BOX BOTTOM CARTON BOX BOTTOM	2 1 5 1 1 6 5 2 2 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	42PA50A/M  TH-37PA50H/M  TH-42PA50A ⚠  TH-42PA50M ⚠  TH-42PA50M ⚠  TH-37PA50H ⚠  TH-37PA50H/M  TH-37PA50H/M
15 15 15 15 15 16 16 17 18	TMKG561  TMM17499  TMM25401  TMM7464-2  TMM7468-1  TMME047  TMME061  TMME190  TMME199  TMME206  TMME226  TPCE77301  TPCE77302  TPCE77303  TPCE77602  TPCE77603  TPCE77701  TPCE778801	SPONGE L/R CLAMPER CARTON BOX TOP CARTON BOX BOTTOM	2 1 5 1 1 6 5 2 2 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	42PA50A/M TH-37PA50H/M TH-42PA50A ⚠ TH-42PA50H ⚠ TH-42PA50H ⚠ TH-37PA50H ⚠ TH-37PA50H/M TH-37PA50H/M

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
21	TPDF1393	TOP PAD	1	TH- 42PA50A/H/M
21	TPDF1394	TOP PAD	1	TH-37PA50H/M
22	TPEH170	PROTECT COVER	1	
23	TPEH273	TOP-PROTECT SHEET	1	
24	TQBC2040	INSTRUCTION BOOK(ENGLISH)	1	TH-42PA50A 🗥
24	TQBC2041	INSTRUCTION	1	TH-37/42PA50H
	-	BOOK (ENGLISH)		Δ
24	TQBC2042	INSTRUCTION BOOK (CHINESE)	1	TH-37/42PA50H ⚠
24	TQBC2043	INSTRUCTION BOOK(ARABIC)	1	TH-37/42PA50M ⚠
24	TQBC2044	INSTRUCTION BOOK(PERSIAN)	1	TH-37/42PA50M
	TSXL436	CABLE (DG2-H2)	1	
	TSXL438	CABLE (PA30- H30/DG20-PA20)	2	
	TSXL440	CABLE(D33-C21/D34-C11)	2	
	TSXL460	CABLE (Z50-H50)	1	
25	TTUA1184	REAR COVER	1	TH-42PA50A 🛆
25	TTUA1185	REAR COVER	1	TH-42PA50H A
25	TTUA1186	REAR COVER	1	TH-42PA50M A
26	TTUA1187	REAR COVER	1	TH-37PA50H A
25	TTUA1188	REAR COVER	1	TH-37PA50M A
26	TXFKE01YFSE	ESCUTCHEON ASS'Y	1	TH- 42PA50A/H/M
26	TXFKE01YGSE	ESCUTCHEON ASS'Y	1	TH-37PA50H/M
27	TXFMZ01YFSUA	STAND BLOCK ASS'Y	2	
	TXJ/SWYFSE	SPEAKER LEAD	2	
	TXJ/Z2YFSE	SPEAKER LEAD(SPWL/SPWR)	1	
	XTB3+10GFJ	SCREW	4	
	XTB4+12GFJ	SCREW	29	TH-37PA50H/M
 	XTB4+12GFJ	SCREW	33	TH-
	VMD 4 - 1 2 CD TV	CODEN	-	42PA50A/H/M
	XTB4+12GFJK	SCREW	1	
	XTB4+15AFJK	SCREW	19	
	XTV3+10JFJK XWG3F15FJ	SCREW WASHER	2	TH- 37PA50H/M,TH- 42PA50A/H
	XWG3F16FJ	WASHER	2	TH-42PA50M
	XYC4+FJ35FJK	SCREW	8	
	XYN3+F6FJ	SCREW	1	
	XYN3+F8FJ	SCREW	32	
	XYN3+J10FJ	SCREW	1	
	XYN3+J12FJ	SCREW	23	
	XYN3+J8FJ	SCREW ROHS	2	
	XYN4+E8FJ	SCREW(EARTH)	1	
	XYN5+C15FJ	SCREW	8	
	XZBT6506	POLY BAG	1	
	AZBIOJOO			
	AZB10300			
	AZBIO300			
	AZBIOSOO			
	A2B10300			

#### 16 Electrical Replacement Parts List

#### 16.1. Replacement Parts List Notes

#### **Important Safety Notice**

Components identified by A mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

#### RTL (Retention Time Limited)

**Note:** The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.

After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

<u>1. Resistor</u> <u>2. Capacitor</u>

Example: Example:

ERD25TJ104 <u>C</u> 100KOHM, <u>J</u>, 1/4W ECKF1H103ZF <u>C</u> 0.01UF, <u>Z</u>, 50V

Type Allowance Type Allowance

Туре	Allowance
C: Carbon F: Fuse M: Metal Oxide Metal FIlm S: Solid W: Wire Wound	F:±1% G:±2% J:±5% K:±10% M:±20%

Туре	Allowance
C : Ceramic E : Electrolytic P : Polyester Polyprop lene T : Tantalum	C: ±0.25pF D: ±0.5pF F: ±1pF G: ±3pF J: ±5pF K: ±10pF L: ±15pF M: ±20pF P: +100%, -0% Z: +80%, -20%

#### 16.2. Electrical Replacement Parts List (37inch)

#### Note:

All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by AVC-SPC.

Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F401.40	K5D802BNA005	TIME LAG FUSE HIGH	2	Δ
C001	FC.T1YC1H221.T	C 220PF, J, 50V	1	
C002	ECA1HM100		1	
C002	ECJ1VF1H104Z		1	
C004	<del> </del>	C 1000PF, Z, 50V	1	
		C 22PF, J, 50V	1	
C006	ECA0JM102	E 1000UF, 6.3V	1	
C007		C 0.47UF, K, 16V	1	
C008	ECJ1XF1C104Z		1	
C009	<del> </del>	C 100PF, J, 50V	1	
		C 33PF, J, 50V	2	
C11	K1MN55BA0076		1	
C12	K1KA04BA0107		1	
C014	ECJ3YB0J335K	C 33UF, J, 25V	1	
C019	ECJ1XC1H220J		1	
C020	ECA0JM102	E 1000UF, 6.3V	1	
		C 0.1UF, Z, 16V	1	
C21		55P CONNECTOR	1	
		C 100PF, J, 50V	1	
C22	K1KA04BA0107	4P CONNECTOR	1	
C23	K1KA12AA0153	12P CONNECTOR	1	
C024	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C027	ECJ3YB0J335K		1	
C029,30	ECJ1XC1H330J	C 33PF, J, 50V	2	
C036	ECJ1XC1H221J	C 220PF, J, 50V	1	
C037	ECJ1XF1H102Z		1	
C038	ECJ3VB1C474K	C 0.47UF, K, 16V	1	
C040	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C041-43	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C1100	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1101,0 2	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1104	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1105,0 6	ECJ1XB0J105K	C 1UF, K, 16V	2	
C1107	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C1108- 11	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C1112	EEEHB1C100R	C 10PF, J, 16V	1	
C1113,1 4	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1115	EEEHB0G101R	C 100PF, J, 4V	1	
C1116	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C1117- 19	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C1120	EEEHB0G101R	C 100PF, J, 4V	1	
C1122	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C1123,2 4	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1125	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C1126	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1127	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C1128,2 9	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1130	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C1131	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1132	EEEHB1C100R	C 10PF, J, 16V	1	
C1133,3 4	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1135	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C1136- 39	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C1140	EEEHB1E330P	C 33PF, J, 25V	1	
00				

(37111	- ,			
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description	_	
C1150	EEEHB1E330P	C 33PF, J, 25V	1	
C1152	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1155	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1170	EEVHP1C100R	E 10UF, 16V	1	
C1171	EEEHB1C470P	C 47PF, J, 16V	1	
C1172	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1174 C1175	ECJ1XB1C104K ECJ1XC1H151J	C 0.1UF, Z, 16V C 150PF, J, 50V	1	
C1178	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1181,8	EEEHBOG101R	C 100PF, J, 4V	2	
C1186	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C1187	ECJ1XC1H180J		1	
C1188	ECJ1XC1H220J	C 22PF, J, 50V	1	
C1193	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1194	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C1195	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1196- 98	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C1200,0 1	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1202	EEEHB0G101R	C 100PF, J, 4V	1	
C1203	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1204	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1205,0		C 270PF, J, 50V	2	
C1207	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1208	ECJ1XC1H271J	†	1	
C1209	EEEHB0G101R	C 100PF, J, 4V	1	
C1211 C1212,1	ECJ1XB1C104K ECJ1XC1H271J	C 0.1UF, Z, 16V C 270PF, J, 50V	2	
3 C1214- 16	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
	ECJ1XC1H271J	C 270PF, J, 50V	2	
C1219	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C1220,2 1	ECJ1XC1H101J	C 100PF, J, 50V	2	
C1222	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C1223- 25		C 68PF, J, 50V	3	
6		C 560PF, J, 50V	2	
1		C 560PF, J, 50V	2	
C2013,1		C 560PF, J, 50V	2	
C2016,1		C 560PF, J, 50V	2	
C2019 C2020	ECA1CM221 ECA1HM220	E 220UF, 16V E 22UF, 50V	1	
C2020	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2111	ECJ2VF1C104Z ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2118,1 9	ECEA1CN470U	E 47UF, 16V	2	
C2124	ECJ3XB1C106M	C 1.0UF, K, 16V	1	
C2125,2	ECJ1VB1H102K	C 1000PF, K, 50V	2	
C2127	ECA1CMH101	E 100UF, 16V	1	
C2128	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2129,3 0	F1J1A1050002	C 1UF, Z, 50V	2	
C2131	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2132	ECA1HM100	E 10UF, 50V	1	
C2133,3 4	ECJ1XC1H470J	C 47PF, J, 50V	2	
C2143	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2146	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2147	ECA1HM220	E 22UF, 50V	1	
C2148- 50	ECJ2FB1C105K	C 1UF, Z, 16V	3	
C2152	ECJ2FB1C105K	C 1UF, Z, 16V	1	
C2153	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	ECTOVELCIOAR	Description	1	
		C 0.1UF, Z, 16V	2	
0	ECJZFBICIOSK	C 1UF, Z, 16V		
	ECA1CMH101	E 100UF, 16V	1	
	ECJ2FB1C105K	C 1UF, Z, 16V	2	
5				
C2172	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C2173	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2174	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C2175- 77	ECJ1VB1H103K	C 0.001UF, K, 50V	3	
C2178,7 9	ECA1HM100	E 10UF, 50V	2	
C2181	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2183	ECA1HM3R3	E 3.3UF, 50V	1	
C2184,8 5	ECJ2VF1C104Z	C 0.1UF, Z, 16V	2	
C2189,9 0	ECJ2FB1C105K	C 1UF, Z, 16V	2	
C2191	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2192	ECA1HM100	E 10UF, 50V	1	
C2195	ECJ1XC1H470J	C 47PF, J, 50V	1	
C2196	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2197	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C2198	ECA1CMH101	E 100UF, 16V	1	
C2199	ECJ1VC1H560J	C 56PF, J, 50V	1	
C2200	ECJ1XC1H470J	C 47PF, J, 50V	1	
C2201,0 2	ECJ1XC1H050C	C 5PF, C, 50V	2	
C2203	ECJ1VC1H100C	C 10PF, C, 50V	1	
C2204	ECJ1XC1H220J	C 22PF, J, 50V	1	
	ECA1CMH101	E 100UF, 16V	1	
C2207	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2214	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C2215	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2222	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2223	ECJ1XC1H390J	C 39PF, J, 50V	1	
C2225	ECJ2FB1C105K	C 1UF, Z, 16V	1	
C2226	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C2300,0	ECJ1VF1H104Z	C 0.1UF, Z, 50V	2	
C2305	ECA1CMH101	E 100UF, 16V	1	
C2306	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2307	ECA1CMH101	E 100UF, 16V	1	
C2308,0	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
C2310,1	ECJ3YB1A475K	C 0.047UF, K, 10V	2	
C2314	ECJ1VB1H562K	C 5600PF, K, 50V	1	
C2315	ECA1CHG470	E 47UF, 16V	1	
C2316	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2318	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2319	ECJ1XC1H471J	C 470PF, J, 50V	1	
C2320	ECJ1VB1E473K	C 0.047UF, K, 25V	1	
C2322	ECJ1XC1H471J	C 470PF, J, 50V	1	
C2323	ECJ1VB1E473K	C 0.047UF, K, 25V	1	
C2324	ECJ1XC1H471J	C 470PF, J, 50V	1	
C2325	ECJ1VB1E473K	C 0.047UF, K, 25V	1	
C2327	ECJ1XC1H471J	C 470PF, J, 50V	1	
C2328	ECJ1VB1E473K	C 0.047UF, K, 25V	1	
C2329- 32	ECJ1VB1H332K	C 3300PF, K, 50V	4	
C2358	ECA1CMH101	E 100UF, 16V	1	
C2359	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2372	ECA1HHG100	E 10UF, 50V	1	
C2374 C2376-	ECA1HHG100 ECJ2XB1H102K	E 10UF, 50V C 1000PF, K, 50V	4	
79 C2384-	ECJ2XB1H102K	C 1000PF, K, 50V	4	
87 C2428,2	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
9 C2430	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
4		- 2.202, 10, 20,		

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	TG T0 TD 1 2 00 FW	Description		
8	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
2	ECJ1XC1H221J	C 220PF, J, 50V	2	
C2445,4	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2449,5	ECA1EHG331	E 330UF, 25V	2	
C2453,5	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2457,5	ECJ2FB0J335K	C 3.3UF, K, 16V	2	
C2461,6 2	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2465,6	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2469,7	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2473,7	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2477,7	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2481- 84	ECJ2FB1E224K	C 22UF, K, 25V	4	
C2489,9	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2497,9	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2512	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C2515	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3005	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3015	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3021- 24	F1J1A1050002	C 1UF, Z, 50V	4	
C3032	ECJ2XB1A105K	C 1UF, K, 10V	1	
C3033	F1J1A1050002	C 1UF, Z, 50V	1	
C3035	F1J1A1050002	C 1UF, Z, 50V	1	
C3038	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3040	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3043	F1J1A1050002 ECJ2VF1C104Z	C 1UF, Z, 50V C 0.1UF, Z, 16V	1	
C3045	F1J1A1050002	C 1UF, Z, 50V	1	
C3047	F1J1A1050002	C 1UF, Z, 50V	1	
C3049,5	F1J1A1050002	C 1UF, Z, 50V	2	
0 C3054-	F1J1A1050002	C 1UF, Z, 50V	3	
56 C3058	ECA1CMH101	E 100HE 16W	1	
C3059	ECJ2VF1C105Z	E 100UF, 16V C 1UF, Z, 16V	1	
C3060	ECJ2VF1C103Z	C 0.1UF, Z, 16V	1	
C3062-	ECJ2VF1C104Z	C 0.1UF, Z, 16V	3	
64		, ,		
C3066	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3068	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3069	ECA1EM471	E 470UF, 25V	1	
C3207 C3208	ECJ2FB1C105K	C 1UF, Z, 16V	1	
C3208	ECJ2XB1C474K ECJ2VF1C104Z	C 0.47UF, Z, 16V C 0.1UF, Z, 16V	1	
C3212	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C3214	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C3217,1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
8 C3226-	ECJ2FF1A106Z	C 0.001UF, Z, 10V	4	
29 C3230	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3233	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3235	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C3236	ECA1HM100	E 10UF, 50V	1	
C3241- 43	ECJ2VF1C104Z	C 0.1UF, Z, 16V	3	
C3248	ECJ2FB1C105K	C 1UF, Z, 16V	1	
C3249 C3250,5	ECJ2XB1C474K ECJ1XF1C104Z	C 0.47UF, Z, 16V C 0.1UF, Z, 16V	2	
1 C3252	ECJ2FB1C105K	C 1UF, Z, 16V	1	
C3253-	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
55				

		1		
Ref. No.	Part No.	Part Name &	Pcs	Remarks
C3256	ECJ2FB1C105K	Description C 1UF, Z, 16V	1	
C3257-		C 0.1UF, Z, 16V	5	
61		, ,		
C3262-	ECJ1VB1H472K	C 4700PF, K, 50V	3	
64		T 000 4		
C4001	EEVHB0G221P	E 220UF, 4V	1	
C4002 C4003	ECJ1XB1C104K EEFCD0G560R	C 0.1UF, Z, 16V 56UF,	1	
C4003	ECJ2YB0J225K	C 2.2UF, K, 6.3V	1	
C4005	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4006	ECJ1XC1H471J	C 470PF, J, 50V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
5				
	ECJ1XC1H470J	C 47PF, J, 50V	1	
C4018	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4019		C 68UF, Z, 16V	1	
	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
4	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4025	EEVHB0J470R	E 47UF, 6.3V	1	
C4026	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4027	EEEHB1E330P	C 33PF, J, 25V	1	
C4028,2	ECJ3XB0J106M	C 10UF, M,6.3V	2	
9				
C4030	EEEHB1C100R	C 10PF, J, 16V	1	
C4031- 33	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4035	EEVHB0J470R	E 47UF, 6.3V	1	
C4037	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
9				
C4043- 45	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4047	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4047	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4049	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4050	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4051	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C4052	ECJ1XB0J105K	C 1UF, K, 16V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
4	=a =1 + == 1 a 0 0 2 ==	G 0 000000 17 1677		
C4055 C4056	ECJ1VB1C823K ECJ1VB1H103K	C 0.082UF, K, 16V C 0.001UF, K, 50V	1	
		C 0.1UF, K, 16V	2	
8		0 012027 117 201	-	
C4059	EEVHB0J470R	E 47UF, 6.3V	1	
C4060	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4061	EEVHB0J470R	E 47UF, 6.3V	1	
C4062	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4063-	ECJ2VB1C104K	C 0.1UF, K, 16V	3	
65 C4066	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4070	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4072	ECJ2YB0J225K	C 2.2UF, K, 6.3V	1	
C4100-	ECJ3XB0J106M	C 10UF, M,6.3V	3	
02				
C4103	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4104	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4105	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4106	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4107	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4108 C4115-	ECJ1VB1C105K ECJ3XB0J106M	C 0.01UF, K, 16V C 10UF, M,6.3V	3	
17		5 1001 / M, 0.3V		
C4118-	ECJ1XC1H390J	C 39PF, J, 50V	3	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
2 C4124	EEEHR12101D	C 100PF .T 1077	1	
C4124 C4126	EEEHB1A101P EEVHB0J470R	C 100PF, J, 10V E 47UF, 6.3V	1	
C4127	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4128-	ECJ1VB1H103K	C 0.001UF, K, 50V	4	
	1	1	I	
31	BBBUD 001 01 -	G 100DE 7 1		
31 C4132 C4133	EEEHB0G101R ECJ1XB1C104K	C 100PF, J, 4V C 0.1UF, Z, 16V	1	

			- 1	
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C4135	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4136	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4151	ECJ3YB0J335K	C 33UF, J, 25V	1	
C4152	ECJ1VB1H103K		1	
C4153-		C 0.01UF, K, 16V	4	
56	DODIVERON	0.0101, 11, 101	1 1	
C4158-	EC T1 VC1 U1 02 T	C 1000PF, J, 50V	9	
66	ECOIACIIII020	C 1000FF, 8, 50V		
	EG T1 VD1 G1 0 4 V	0 0 1777 7 1677	1	
	ECJ1XB1C104K		+ +	
C4168	ECJ1XC1H102J	· · ·	1	
C4170-	ECJ1VB1H103K	C 0.001UF, K, 50V	3	
72				
C4176	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4177,7	ECJ1VB1C105K	C 0.01UF, K, 16V	2	
8				
C4179	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4180	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4181	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C4182	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4233	ECJ1XC1H101J	C 100PF, J, 50V	1	
			+ +	
C4234	ECJ1XB1C104K		1	
C4235	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
l - '	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
2				
C4303	EEEHB1E330P	C 33PF, J, 25V	1	
C4306	ECJ1XC1H050C	C 5PF, C, 50V	1	
C4308,0	ECJ1XC1H220J	C 22PF, J, 50V	2	
9				
C4310-	ECJ1XB0J105K	C 1UF, K, 16V	4	
13				
C4314	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C4315-	ECJ1VF1A105Z	C 1UF, Z, 10V	3	
17		' '		
C4318	EEEHB1E330P	C 33PF, J, 25V	1	
C4341	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4342	ECJ1XB1C104K		1	
		C 0.1UF, Z, 16V	1 1	
C4343	EEVHB0J470R	E 47UF, 6.3V	1	
C4345	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4346	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4348	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4350	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4351,5	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
2				
C4353	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4354	EEVHB0G221P	E 220UF, 4V	1	
		C 0.1UF, Z, 16V	2	
6		0 011017 27 101	-	
C4358	ECJ1XC1H680J	C 68PF, J, 50V	1	
			t 1	
C4359- 70	ECJ1XB1C104K	C 0.1UF, Z, 16V	12	
	EC 11 VBA 11 AE#	C 111E K 1617	1	
C4371	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4372-	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
	= 0 = 1 + m 0 = 1 0 F = 1	0 100 0 100	-	
C4375	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4378	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4379	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4380	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4381		G 1000 T FOT	1	
C-1701	ECJ1XC1H180J	C 18PF, J, 50V		
C4381 C4382	ECJ1XC1H180J ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
		C 2.2UF, K, 6.3V	1 1	
C4382 C4383	ECJ1VB0J225K ECJ1VB1H562K	C 2.2UF, K, 6.3V C 5600PF, K, 50V	1	
C4382	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4382 C4383 C4384- 88	ECJ1VB0J225K ECJ1VB1H562K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V	1	
C4382 C4383 C4384- 88	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K	C 2.2UF, K, 6.3V C 5600PF, K, 50V	1 1 5	
C4382 C4383 C4384- 88 C4390,9	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V	1 1 5	
C4382 C4383 C4384- 88 C4390,9	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V	1 1 5	
C4382 C4383 C4384- 88 C4390,9 1 C4392,9	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 2.2UF, K, 6.3V	1 1 5	
C4382 C4383 C4384- 88 C4390,9 1 C4392,9 3 C4501	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB0J225K EEVHB0J470R	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 2.2UF, K, 6.3V E 47UF, 6.3V	1 1 5 2 2	
C4382 C4383 C4384- 88 C4390,9 1 C4392,9 3 C4501 C4502,0	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB0J225K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 2.2UF, K, 6.3V	1 1 5 2	
C4382 C4383 C4384- 88 C4390,9 1 C4392,9 3 C4501 C4502,0 3	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB0J225K EEVHB0J470R ECJ1XB1C104K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 2.2UF, K, 6.3V E 47UF, 6.3V C 0.1UF, Z, 16V	1 1 5 2 2 1 2	
C4382 C4383 C4384- 88 C4390,9 1 C4392,9 3 C4501 C4502,0 3 C4504	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB0J225K EEVHB0J470R ECJ1XB1C104K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 2.2UF, K, 6.3V E 47UF, 6.3V C 0.1UF, Z, 16V	1 1 5 2 2 1 2	
C4382 C4383 C4384- 88 C4390,9 1 C4392,9 3 C4501 C4502,0 3 C4504 C4505	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB0J225K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 2.2UF, K, 6.3V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.1UF, Z, 16V	1 1 5 2 2 1 2	
C4382 C4383 C4384- 88 C4390,9 1 C4392,9 3 C4501 C4502,0 3 C4504 C4505 C4506	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB0J225K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1C105K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 2.2UF, K, 6.3V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V	1 1 5 2 2 1 2 1 1	
C4382 C4383 C4384- 88 C4390,9 1 C4392,9 3 C4501 C4502,0 3 C4504 C4505 C4506 C4507	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB0J225K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 2.2UF, K, 6.3V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, K, 16V	1 1 5 2 2 1 2	
C4382 C4383 C4384- 88 C4390,9 1 C4392,9 3 C4501 C4502,0 3 C4504 C4505 C4506	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB0J225K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1C105K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 2.2UF, K, 6.3V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V	1 1 5 2 2 1 2 1 1	
C4382 C4383 C4384- 88 C4390,9 1 C4392,9 3 C4501 C4502,0 3 C4504 C4505 C4506 C4507	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB0J225K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 2.2UF, K, 6.3V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, K, 16V	1 1 5 2 2 1 2 1 1 1	
C4382 C4383 C4384- 88 C4390,9 1 C4392,9 3 C4501 C4502,0 3 C4504 C4505 C4506 C4507 C4508	ECJ1VB0J225K ECJ1VB1H562K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB0J225K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1C105K	C 2.2UF, K, 6.3V C 5600PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 2.2UF, K, 6.3V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 0.1UF, K, 16V	1 1 5 2 2 1 2 1 1 1 1 1	

	1	1		_
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4511	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4512	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4513	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4514	EEVHB0J470R	E 47UF, 6.3V	1	
C4515	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4516- 18	ECJ1VB1C105K	C 0.01UF, K, 16V	3	
C4519	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4521	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4522- 24	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4525	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4526	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4527,2 8	ECJ1XB0J105K	C 1UF, K, 16V	2	
C4529	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4530- 34	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4535	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4536	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4537	EEVHB0J470R	E 47UF, 6.3V	1	
C4538-	ECJ1XB1C104K	C 0.1UF, Z, 16V	14	
51 C4552,5	ECJ1VB1C105K	C 0.01UF, K, 16V	2	
3				
C4554- 56	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4560,6 1	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
C4562	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4565- 68	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4570- 74	ECJ1XC1H102J	C 1000PF, J, 50V	5	
C4575	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4576- 81	ECJ1XC1H102J	C 1000PF, J, 50V	6	
C4582	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4583- 95	ECJ1XC1H102J	C 1000PF, J, 50V	13	
C4596	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4597	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4598	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C <b>4</b> 599,0 0	ECJ1XB0J105K	C 1UF, K, 16V	2	
C4601	EEEHB0J330R	C 33PF, J, 6.3V	1	
C4602	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4605	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4607- 10	ECJ1VB1H103K	C 0.001UF, K, 50V	4	
C4611	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C4612	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4613	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4701	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4702 C4703	EEFCD0G560R EEEHB0J220R	56UF, C 22PF, J, 6.3V	1	
C4703	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4709	EEVHB0J470R	E 47UF, 6.3V	1	
C4710,1	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4712	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4713	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4714	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4715	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4716	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4717	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4718	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4719- 22	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4723	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4724	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4725	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4726 C4727	ECJ1XB1C104K ECJ1VB1C103K	C 0.1UF, Z, 16V	1	
C4727	ECJ1VB1C103K	C 0.010UF, K, 16V C 0.1UF, Z, 16V	1	
C4729	ECJ1VB1C103K	C 0.010F, K, 16V	1	
-		, . ,		

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
		C 0.1UF, Z, 16V	1	
C4731	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4732	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4734	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4735	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4736	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4737	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
6		- 000 4		
C4858		E 220UF, 4V	1	
C4859	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4861	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4863	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4864	ECJ3XB0J106M	C 10UF, M,6.3V	1	
	ECJ1XC1H101J	C 100PF, J, 50V	2	
8		- 45 6 0		
C4873	EEVHB0J470R	E 47UF, 6.3V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4875,7	ECJ2VB1C104K	C 0.1UF, K, 16V	2	
	ECJ2XB1A105K	C 111E W 1017	1	
		C 1UF, K, 10V C 0.1UF, K, 16V	2	
9	ECJ2VB1C104K	C U.10F, K, 16V	_	
C4880	ECJ2XB1A105K	C 1UF, K, 10V	1	
C4882	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4883	ECJ1XB0J105K	C 1UF, K, 16V	1	
<b>-</b>	EEVHB0J470R	E 47UF, 6.3V	1	
C4892	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4898	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4899			1	
	ECJ1XB0J105K	C 10F, K, 16V	1	
C4901 C4902	EEEHB1C100R	C 10PF, J, 16V	1	
<b>-</b>	ECJ1VB1H103K	C 0.001UF, K, 50V		
C4922	EEVHB0J470R	E 47UF, 6.3V	1	
C4924	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4925	EEEHB1C470P	C 47PF, J, 16V	1	
C4926	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4929	EEEHB1C100R	C 10PF, J, 16V	1	
C4939	EEVHB0G221P	E 220UF, 4V	1	
C4942	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4943	EEEHB1C470P	C 47PF, J, 16V	1	
C4945- 48	ECJ1XC1H102J	C 1000PF, J, 50V	4	
	E071V01U101T	C 100DE T FOT	1	
		C 100PF, J, 50V	-	
C5601	ECA1HM220	E 22UF, 50V	1	
C5604	ECA1HHG100	E 10UF, 50V	1	
C5605	EEUFC1E102	E 1000UF, 25V	1	
C5606	EEUFC1C821	E 820UF, 16V	1	
C5608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5609	ECA1HM220	E 22UF, 50V	1	
C5611	EEUFC1E102	E 1000UF, 25V	1	
C5612	EEUFC1C821	E 820UF, 16V	1	
C5613	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5616	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5617	EEUFC1C821	E 820UF, 16V	1	
	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
9	BBUBC1 0001	E 000mm 10m	-	
C5622	EEUFC1C821	E 820UF, 16V	1	
C5623	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5626	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C5631	EEUFC1C102	E 1000UF, 16V	1	
	ECJ2VF1C474Z	C 0.47UF, Z, 16V	1	
C5641-	ECJ2VF1C104Z	C 0.1UF, Z, 16V	4	
44 C5 670	EC TOVE1 E1 0 475	C 0 1HE & 0517	1	
C5670	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5672	ECA1HM220	E 22UF, 50V	1	
C5673	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5685	ECA1HHG100	E 10UF, 50V	1	
C5686	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5813	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5818	ECA1CM471	E 470UF, 16V	1	
C5820	ECA1CM102	E 1000UF, 16V	1	
C5821	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C6001-	F2A2D221A022	E 220UF, 200V	3	
03			L	1

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6005	F1L1E4750004	C 4.7UF, 25V	1	
C6007,0	ECA2CM101	E 100UF, 160V	2	
C6009	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6011	F1L2J392A022	C 3900UF, K,6.3V	1	
C6012	F1L2J562A022	C 5600UF, K,6.3V	1	
C6016	F1L2J392A022	C 3900UF, K,6.3V	1	
C6017	F1L2J562A022	C 5600UF, K,6.3V	1	
C6021- 30	ECQE2105RKB	P 1UF, 250V	10	
C6031,3	F1L1E4750004	C 4.7UF, 25V	2	
C6034,3 5	F1L1E4750004	C 4.7UF, 25V	2	
C6037	ECQE2224KF	P 2.2UF, K,250V	1	
C6043,4 4	F1L1E4750004	C 4.7UF, 25V	2	
C6046	F1L1E4750004	C 4.7UF, 25V	1	
C6047	F2A2D1510004		1	
C6048	EEUFC1E221	E 220UF, 25V	1	
	F1L1E4750004		1	
C6049		C 4.7UF, 25V	+ +	
1	TCUY1C105ZFN	C 1UF, 16V	2	
4	EEUFC1E221	E 220UF, 25V	2	
C6055	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6056	EEUFC1A101	E 100UF, 10V	1	
C6057	F1L1E4750004	C 4.7UF, 25V	1	
C6058	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6060,6 1	F1K2J471A014	C 470UF, K,6.3V	2	
C6456	ECA2CM101	E 100UF, 160V	1	
C6457	ECA2CHG100	E 10UF, 160V	1	
C6458	F1L1E4750004	C 4.7UF, 25V	1	
C6459	EEUFC1E470	E 47UF, 25V	1	
C6461	ECA1HM101	E 100UF, 50V	1	
C6462-	F1L1E4750004	C 4.7UF, 25V	4	
C6466	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6467	ECJ2XB1H103K		1 1	
		C 4700PF, K, 50V	+-+	
C6468	TCUY1C105ZFN	C 1UF, 16V	1	
C6469	EEUFC1E221	E 220UF, 25V	1	
C6470	ECA1HM221	E 220UF, 50V	1	
C6471	TCUY1C105ZFN	C 1UF, 16V	1	
C6472	ECJ2VB1H333K	C 0.033UF, K, 50V	1	
C6473	TCUY1C105ZFN	C 1UF, 16V	1	
C6474	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6475	EEUFC1E221	E 220UF, 25V	1	
C6476	ECA2CM101	E 100UF, 160V	1	
C6478	ECJ2XB1H103K		1	
	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C6490	F1K2J332A014	C 3300UF, K,6.3V	1	
C6491,9 2	F2A2G100A017	E 100UF, 400V	2	
C6493	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6501- 03	ECJ2XB1H104K	C 0.1UF, K, 50V	3	
C6505	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6507	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6509	ECJ2XC1H102J	C 1000PF, J, 50V	1	
	F1L1E4750004	C 4.7UF, 25V	2	
C6513	ECA2CM101	E 100UF, 160V	1	
C6521	F1L1E4750004	C 4.7UF, 25V	1	
C6523	ECA1VM470	E 47UF, 35V	1	
			1	
C6524	F1K2J471A014	C 470UF, K,6.3V	+ +	
_	ECA2EHG220 F1K2J471A014	E 22UF, 250V C 470UF, K,6.3V	2	
	F1L1E4750004	C 4.7UF, 25V	2	
	F1K2J471A014	C 470UF, K,6.3V	2	
4	l			

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C6543,4	F1K2J102A014	C 1000PF,	2	
4				
C6546	TCUY1C105ZFN	C 1UF, 16V	1	
C6550	ECA2CM101	E 100UF, 160V	1	
C6551	ECQE2224KF	P 2.2UF, K,250V	1	
C6571	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6575	ECJ2XB1H104K		1	
		C 0.1UF, K, 50V		
C6577	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6580,8	TCUY1C105ZFN	C 1UF, 16V	2	
1				
C6584	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6585	TCUY1C105ZFN	C 1UF, 16V	1	
C6587	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6588	TCUY1C105ZFN	C 1UF, 16V	1	
C6589	F1L1E4750004	C 4.7UF, 25V	1	
C6590	TCUY1C105ZFN	C 1UF, 16V	1	
	F1L1E4750004	C 4.7UF, 25V	1	
C6598	ECA1CM220	E 22UF, 16V	1	
C6601-	F2A2D221A022	E 220UF, 200V	3	
03				
C6607	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6608	ECA1EM471	E 470UF, 25V	1	
C6611	F1L2J392A022	C 3900UF, K,6.3V	1	
C6612	F1L2J562A022	C 5600UF, K,6.3V	1	-
C6615	F1L2J562A022	C 5600UF, K,6.3V	1	
C6616	F1L2J392A022	C 3900UF, K,6.3V	1	
C6617				
	F1L2J562A022	C 5600UF, K,6.3V	10	
C6621-	ECQE2105RKB	P 1UF, 250V	10	
30		- 4 5 05		
	F1L1E4750004	C 4.7UF, 25V	2	
2		- 4 5 05		
1 '	F1L1E4750004	C 4.7UF, 25V	2	
5				
C6637	F1L1E4750004	C 4.7UF, 25V	1	
C6639	F1L1E4750004	C 4.7UF, 25V	1	
C6647	TCUY1C105ZFN	C 1UF, 16V	1	
C6650	ECQE2224KF	P 2.2UF, K,250V	1	
C6651,5	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
2				
C6655,5	EEUFC1A101	E 100UF, 10V	2	
6				
C6659,6	F1K2J471A014	C 470UF, K,6.3V	2	
0				
C6901-	TCUY1C105ZFN	C 1UF, 16V	4	
04				
C6911,1	ECJ2XB1H102K	C 1000PF, K, 50V	2	
2		, ,		
C6917	ECJ2XB1H221K	C 220PF, K, 50V	1	
C6931	F1L2E1040002	E 1000UF, 25V	1	
C6933	F1L2E1040002	E 1000UF, 25V	1	
		· · · · · · · · · · · · · · · · · · ·		
C6955- 58	TCUY1C105ZFN	C 1UF, 16V	4	
	EC T03/D1 111 00-	C 1000PE # 50**	_	
C6971,7	ECJ2XB1H102K	C 1000PF, K, 50V	2	
	E1 T OE 1 0 4 0 0 0 0	E 1000175 05**	1	
C6977	F1L2E1040002	E 1000UF, 25V	1	
C6979	F1L2E1040002	E 1000UF, 25V	1	
C7101	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7104-	TCUY1C105ZFN	C 1UF, 16V	3	
06				
C7108-	TCUY1C105ZFN	C 1UF, 16V	3	
10				
C7135	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7137	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7140	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7153	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7161	ECJ3XB2A474K		1	
		C 0.47UF, 6.3V		
C7163	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7165	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7182	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7186	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7201	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7203-	TCUY1C105ZFN	C 1UF, 16V	4	
06				
C7208,0	TCUY1C105ZFN	C 1UF, 16V	2	
9				

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ECJ1XC1H220J	C 22PF, J, 50V	2	
C7219	TCUY1C105ZFN	C 1UF, 16V	1	
C7222,2	TCUY1C105ZFN	C 1UF, 16V	2	
C7235	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7237	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7239	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7242	TCUY1C105ZFN	C 1UF, 16V	1	
C7253,5 4	ECJ1XC1H101J	C 100PF, J, 50V	2	
C7266	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7268	ECJ3XB2A474K	•	1	
C7270	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
	ECJ3XB2A474K ECJ1XC1H101J	C 100PF, J, 50V	2	
3 C9000	EEEHB1C470P	C 47PF, J, 16V	1	
C9001	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
5		, ,		
C9006	F1J0J1060004	C 0.010UF, K, 16V	1	
C9007	EEEHB1C470P	C 47PF, J, 16V	1	
C9008	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9009	F1J0J1060004	C 0.010UF, K, 16V	1	
C9010-	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9013	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9014	ECJ1XC1H101K	C 100PF, K, 50V	1 0	
22		C 0.1UF, Z, 16V	8	
	EEEHB1C470P	C 47PF, J, 16V	1	
C9024 C9025	ECJ1XC1H271J ECJ1XF1C104Z	C 270PF, J, 50V C 0.1UF, Z, 16V	1 1	
	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
7	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
31	ECOIRFICIO42	C 0.101, 2, 10V	•	
C9033	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9035,3 6	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9201,0 2	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9203	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9204	ECJ1VC1H080C	C 8PF, C, 50V	1	
C9205	F1J0J1060004	C 0.010UF, K, 16V	1	
C9206,0 7	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9303	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9304- 57	ECJ1XB1C104K	C 0.1UF, Z, 16V	54	
C9358	EEEHB0G221P	C 220PF, J, 4V	1	
C9359	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9360 C9500	ECJ1XF1C104Z ECJ2VF1C105Z	C 1UF Z 16V	1 1	
C9500 C9502	ECJ2VF1C105Z ECJ2VF1C105Z	C 1UF, Z, 16V C 1UF, Z, 16V	1	
C9503- 12	ECJ1XB1C104K	C 0.1UF, Z, 16V	10	
C9513	EEEHB1C470P	C 47PF, J, 16V	1	
C9514- 17	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C9518	EEEHB1C470P	C 47PF, J, 16V	1	
C9519	ECJ1XC1H101K	C 100PF, K, 50V	1	
	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9703	F1J0J1060004	C 0.010UF, K, 16V	1	
C9705,0	F1J0J1060004	C 0.010UF, K, 16V	2	
C9707	EEEHB1C470P	C 47PF, J, 16V	1	
C9712,1	F1J0J1060004	C 0.010UF, K, 16V	2	
C9714,1 5	ECGRL0G680R	C 68PF, J, 4V	2	
	ECJ1XC1H220J	C 22PF, J, 50V	1	
C9718	ECJ1XC1H220J		1	
C9719,2 0	ECJ1XC1H102J	C 1000PF, J, 50V	2	
	ECOIVCIUI050	C 1000FF, U, 50V		

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	ECTIVEICIOAR	Description	2	
2		C 0.1UF, Z, 16V	2	
C9723,2	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C9725	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C9727	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C9728,2 9	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9730,3	EEEHB1C470P	C 47PF, J, 16V	2	
C9732	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9733	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9734,3	EEEHB1C470P	C 47PF, J, 16V	2	
C9736	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9739,4 0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9741	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9742	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9743,4	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9900,0	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
CB1-P7	K1MN68BA0002	68P CONNECTOR	7	
CB1-B7	KIMMOSBAUUU2	68P CONNECTOR	<u> </u>	
D3	K1KA30AA0009	30P CONNECTOR	1	
D3 D4	K1KA30AA0009	14P CONNECTOR	1	
D5	K1KA31A00007	31P CONNECTOR	1	
D6	K1KA20A00310	20P CONNECTOR	1	
D8	K1KA08AA0104	8P CONNECTOR	1	
D20		20P CONNECTOR	1	
D25	K1KA20AA0009	20P CONNECTOR	1	
D33,34	K1MN55BA0076	55P CONNECTOR	2	
D1151	MA8120M	ZENER DIODE	1	
D1154- 61	MA8062MTX	ZENER DIODE	8	
D2011- 14	MA111	DIODE	4	
D2104	MA152K	DIODE	1	
D2107- 09	MA8140M	ZENER DIODE	3	
D2111	MA8140M	ZENER DIODE	1	
D2116	MA8140M	ZENER DIODE	1	
D2118	MA8140M	ZENER DIODE	1	
D2119	B0BC01100001	ZENER DIODE	1	
D2120	MA152K	DIODE	1	
D2300,0	MA111	DIODE	2	
D2303,0	MA111	DIODE	2	
D2315,1	B0JCDD000002	DIODE	2	
D2319,2	B0JCDD000002	DIODE	2	
D2332	MA111	DIODE	1	
D2512	MA8056M	ZENER DIODE	1	
D2513,1	MA152K	DIODE	2	
D2520	B3AAA0000770	LED	1	
D2523	MA152K	DIODE	1	
D2524	MA8056M	ZENER DIODE	1	
D2529 D3003	MA8056-M	ZENER DIODE ZENER DIODE	1	
D3005,0	MA8140M MA8140M	ZENER DIODE	2	
D3017	MA8140M	ZENER DIODE	1	
D3021	MA152	DIODE	1	
D3023	MA111	DIODE	1	
D3024	B0BC01100001	ZENER DIODE	1	
D3026	MA111	DIODE	1	
D3034- 44	MA8140M	ZENER DIODE	11	
D3100	MA8140M	ZENER DIODE	1	
D3237,3	MA152K	DIODE	2	
8	MA111	DIODE	1	
D4231				

Ref.	Part No.	Part Name &	Pcs	Remarks
No. D5610	MA3X78900L	Description ZENER DIODE	1	
D5614	B0BC6R600005	ZENER DIODE	1	
D5615	B0BC4R700007	ZENER DIODE	1	
D5616	B0BC6R600005	ZENER DIODE	1	
D5617	B0BC01100001	ZENER DIODE	1	
D5618	B0BC03900015	ZENER DIODE	1	
D5637,3 8	MA152	DIODE	2	
D5639	MA3047H	ZENER DIODE	1	
D5640	MA3068H	ZENER DIODE	1	
D5641	MA152	DIODE	1	
D5642	MA3100H	ZENER DIODE	1 1	
D5643 D5644	MA152 MA3068M	DIODE ZENER DIODE	1 1	
D5645-	MA152	DIODE	3	
47	_	-		
D6001,0 2	B0HBSN000008	DIODE	2	
D6015	B0ECHP000003	DIODE	1	
D6020	BOHBSN000008	DIODE	1	
D6021	BOECHPOOOOOO	DIODE	1 1	
D6022 D6023	B0HBSN000008 B0ECHP000003	DIODE	1 1	
D6023	B0HBSN000008	DIODE	1	
D6029	B0HBSN000008	DIODE	1	
D6035	MA8033L	ZENER DIODE	1	
D6036	MA111	DIODE	1	
D6040,4 1	B0ECHP000003	DIODE	2	
D6051	B0ECHP000003	DIODE	1	
D6052,5 3	B0JCME000037	DIODE	2	
D6054	B0ECHP000003	DIODE	1	
D6055	B0JCME000037	DIODE	1	
D6057	B0ECHP000003 MA111	DIODE	2	
D6058,5 9	MAIII	DIODE		
D6062	MA111	DIODE	1	
D6063	MA8051L	ZENER DIODE	1	
D6064	MA111	DIODE	1 1	
D6065 D6066,6	LNJ301MPUJA MA8330M	ZENER DIODE	2	
7 D6451	B0JCME000037	DIODE	1	
D6452,5		DIODE	2	
3				
D6455	MA111	DIODE	1	
D6456	В0ЕСНР000003	DIODE	1	
D6456 D6459	B0ECHP000003 MA111	DIODE DIODE	1 1	
D6456	В0ЕСНР000003	DIODE	1	
D6456 D6459 D6460,6	B0ECHP000003 MA111	DIODE DIODE	1 1	
D6456 D6459 D6460,6 1 D6462 D6463	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H	DIODE DIODE DIODE DIODE ZENER DIODE	1 1 2 1 1	
D6456 D6459 D6460,6 1 D6462 D6463 D6464	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H B0JCME000037	DIODE DIODE DIODE DIODE ZENER DIODE DIODE	1 1 2 1 1 1	
D6456 D6459 D6460,6 1 D6462 D6463	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H	DIODE DIODE DIODE DIODE ZENER DIODE	1 1 2 1 1	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H B0JCME000037	DIODE DIODE DIODE DIODE ZENER DIODE DIODE	1 1 2 1 1 1	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6	B0ECHP000003 Mal11 B0HCKS000002 B0JCME000037 Ma8056H B0JCME000037 Ma8330M	DIODE DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE ZENER DIODE	1 1 2 1 1 1 2	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H B0JCME000037 MA8330M B0ECHP000003	DIODE DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE DIODE DIODE	1 1 2 1 1 1 2	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468 D6470,7	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H B0JCME000037 MA8330M B0ECHP000003	DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 1 2 1 1 1 2 1 1	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468 D6470,7 1 D6473 D6475	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H B0JCME000037 MA8330M B0ECHP000003 MA111 MA111 MA111 MA111	DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE	1 1 2 1 1 1 2 1 1 2 2 1 1 1 2	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468 D6470,7 1 D6473 D6475 D6476	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H B0JCME000037 MA8330M B0ECHP000003 MA111 MA111 MA111 B0ECHP000003	DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE	1 1 2 1 1 1 2 1 1 2 2 1 1 1 2	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468 D6470,7 1 D6473 D6475 D6476 D6477	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H B0JCME000037 MA8330M B0ECHP000003 MA111 MA111 MA111 B0ECHP000003 MA111	DIODE DIODE DIODE  DIODE ZENER DIODE DIODE ZENER DIODE	1 1 2 1 1 1 2 1 1 2 2 1 1 1 2	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468 D6470,7 1 D6473 D6475 D6476	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H B0JCME000037 MA8330M B0ECHP000003 MA111 MA111 MA111 B0ECHP000003	DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE	1 1 2 2 1 1 1 2 2 1 1 1 1 1 1 1 1 1 1 1	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468 D6470,7 1 D6473 D6475 D6476 D6476 D6477 D6478 D6479 D6481,8	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H B0JCME000037 MA8330M B0ECHP000003 MA111 MA111 B0ECHP000003 MA111 B0ECHP000003 MA111 B0HCKS000002	DIODE DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE	1 1 2 1 1 1 2 1 1 2 1 1 1 2	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468 D6470,7 1 D6473 D6475 D6476 D6476 D6478 D6479 D6481,8 2 D6483-	B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 MA8056H B0JCME000037 MA8330M B0ECHP000003 MA111 MA111 MA111 B0ECHP000003 MA111 B0ECHP000003 MA111 B0HCKS000002 MA111	DIODE DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE	1 1 2 1 1 1 2 1 1 2 1 1 1 2 1 1 1 1 1 1	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468 D6470,7 1 D6473 D6475 D6476 D6478 D6478 D6478 D6479 D6481,8 2 D6483-90 D6491,9	BOECHP000003 MA111 BOHCKS000002 BOJCME000037 MA8056H BOJCME000037 MA8330M BOECHP000003 MA111 MA111 MA111 BOECHP000003 MA111 BOHCKS000002 MA111 MA8330M	DIODE DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE	1 1 1 1 2 1 1 1 1 1 1 1 1 1 2 2 1 1 1 1	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468 D6470,7 1 D6473 D6475 D6476 D6478 D6478 D6478 D6479 D6481,8 2 D6483-90 D6491,9 2	BOECHP000003 MA111 BOHCKS000002 BOJCME000037 MA8056H BOJCME000037 MA8330M BOECHP000003 MA111 MA111 MA111 BOECHP000003 MA111 BOHCKS000002 MA111 MA8330M MA8056H BOECHP000003	DIODE DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE	1 1 1 2 1 1 1 1 1 1 1 1 1 2 8 8 2 2	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468 D6470,7 1 D6473 D6475 D6476 D6478 D6478 D6478 D6479 D6481,8 2 D6483-90 D6491,9	BOECHP000003 MA111 BOHCKS000002 BOJCME000037 MA8056H BOJCME000037 MA8330M BOECHP000003 MA111 MA111 MA111 BOECHP000003 MA111 BOHCKS000002 MA111 MA8330M MA8056H	DIODE DIODE DIODE DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE	1 1 1 2 1 1 1 1 1 1 1 1 1 2 8 8	
D6456 D6459 D6460,6 1 D6462 D6463 D6464 D6465,6 6 D6467 D6468 D6470,7 1 D6473 D6475 D6476 D6477 D6478 D6479 D6481,8 2 D6483-90 D6491,9 2 D6495	BOECHPO00003 MA111 BOHCKS000002 BOJCME000037 MA8056H BOJCME000037 MA8330M BOECHPO00003 MA111 MA111 BOECHPO00003 MA111 BOHCKS000002 MA111 MA8330M MA8056H BOECHPO00003 BOECHPO00003	DIODE DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE	1 1 1 2 2 1 1 1 1 1 1 1 1 1 1 2 8 8 2 1 1	

	ı	I		I
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
D6503	MA8056H	ZENER DIODE	1	
D6509	MA111	DIODE	1	
D6511	B0HCMM000014	DIODE	1	
D6512-	MA111	DIODE	3	
14				
D6515	MA8240M	ZENER DIODE	1	
D6516	MA111	DIODE	1	
D6519	MA111	DIODE	1	
D6520	B0JCKG000002	DIODE	1	
D6521	B0ECHP000003	DIODE	1	
D6522	MA111	DIODE	1	
D6523	B0ECHP000003	DIODE	1	
D6524	MA8051L	ZENER DIODE	1	
D6525	MA111	DIODE	1	
D6526	B0HCMM000014	DIODE	1	
D6527	MA111	DIODE	1	
D6529	B0JCME000037	DIODE	1	
D6541	<u> </u>			
<b>—</b>	B0HCKS000002	DIODE	1	
D6542	MA111	DIODE	1	
D6543	B0HCKS000002	DIODE	1	
D6544	MA111	DIODE	1	
D6545	MA8051L	ZENER DIODE	1	
D6546-	MA8330M	ZENER DIODE	3	
48				
l	MA111	DIODE	2	
0				
D6551	B0JCME000037	DIODE	1	
1	MA111	DIODE	2	
3				
D6554	B0HCKS000002	DIODE	1	
D6570	B0HCMM000014	DIODE	1	
D6572	B0ECHP000003	DIODE	1	
D6582	MA8051L	ZENER DIODE	1	
D6583	LNJ301MPUJA	LED	1	
D6584	MA111	DIODE	1	
D6585,8	MA8330M	ZENER DIODE	2	
6				
	B0HBSN000008	DIODE	2	
2				
D6615	B0ECHP000003	DIODE	1	
D6620	B0HBSN000008	DIODE	1	
D6621	B0ECHP000003	DIODE	1	
D6622	B0HBSN000008	DIODE	1	
D6623	B0ECHP000003	DIODE	1	
D6624	B0HBSN000008	DIODE	1	
D6629	B0HBSN000008	DIODE	1	
D6635	MA8033L	ZENER DIODE	1	
D6636	MA111	DIODE	1	
D6640	B0ECHP000003	DIODE	1	
D6647	B0ECHP000003	DIODE	1	
D6901-	MA8056H	ZENER DIODE	3	
03			<u></u>	
D6905	B0ECHP000003	DIODE	1	
D6909,1	воеснроооооз	DIODE	2	
0				
D6956,5	ма8056н	ZENER DIODE	2	
7				
	В0ЕСНР000003	DIODE	2	
2			<u> </u>	
D9000-	MA3033	ZENER DIODE	3	
02	W2700	DIODE	_	
D9011,1	MA728	DIODE	2	
	MA152K	DIODE	2	
6			_	
	MA728	DIODE	2	
1			L	
D9900,0	MA152K	DIODE	2	
1				
DG2	K1MN40A00024	40P CONNECTOR	1	
DG3	K1KA20B00155	20P CONNECTOR	1	
DG5	K1KA21B00008	21P CONNECTOR	1	
DG20	K1MN30A00068	30P CONNECTOR	1	
DG32	K1KA08AA0150	8P CONNECTOR	1	

Ref.	Part No.	Part Name & Description	Pcs	Remarks
FL1100	J0HABH000012	LC FILTER	1	
FL4016,	J0HABH000012	LC FILTER	2	
17				
FL4020- 23	Ј0НАВН000012	LC FILTER	4	
FL7106	J0HABH000013	LC FILTER	1	
FL7201	J0HABH000013	LC FILTER	1	
FL9000- 04	Ј0НАВН000013	LC FILTER	5	
FL9300- 02	Ј0НАВН000013	LC FILTER	3	
FL9701, 02	Ј0НАВН000012	LC FILTER	2	
FL9703,	ЈОНАВНОООО13	LC FILTER	2	
FL9900,	Ј0НАВН000013	LC FILTER	2	
H2	K1MN40B00045	40P CONNECTOR	1	
H5,6A	K1KA15AA0288	15P CONNECTOR	2	
H12	K1KA09AA0190	9P CONNECTOR	1	
н15	K1KA04AA0150	4P CONNECTOR	1	
н30	K1MN30A00068	30P CONNECTOR	1	
н50	K1MN35A00013	35P CONNECTOR	1	
н53	K1KA12AA0178	12P CONNECTOR	1	
HMM1-M4	TMM25401	CLAMPER	4	
IC1103	C0DBEZG00013	IC	1	
IC1104	C2CBYF000032	IC	1	
IC1106	CXA1875AM	LINEAR IC	1	
IC1107	TVRN610	IC	1	TH-37PA50H
IC1107	TVRN776	IC	1	TH-37PA50M
IC1107	C0EBE0000336	IC	1	III STEASOM
IC1108	C0JBBZ000281	IC	1	
IC1110	C0CBCBD00043	IC	1	
IC1110	C3ABPG000133	IC	1	
IC1114	TVRN603-1	IC	1	
IC1117		IC	1	
IC1117	C0JBAZ002186 C0ZBZ0001038	IC	1	
IC2103	AN77L08M	IC	1	
IC2103	C0ABBB000038	IC	1	
	+		1	
IC2105	AN15861A-VT C1AB00002135	IC	1	
IC2106		IC	<del>+</del>	
IC2107	CODBEZE00006	IC	1	
IC2108	C0EBF0000354	IC	1	
IC2300	C1BB00000800	IC	1	
IC2302	NJM2904M	LINEAR IC	1	
1C2305, 06	C1BB00000818	IC	2	
IC3005	AN15866A-VT	IC	1	
IC3006	CXA1315M	LINEAR IC	1	
IC4005	C1AB00002298	IC	1	
IC4008	COCBCBD00008	IC	1	
IC4009	C0CBCAC00282	IC	1	
IC4011	COCBCAC00282	IC	1	
IC4012	C1AB00001834	IC	1	
IC4013	C1AB00002202	IC	1	
IC4014	C0JBAZ002186	IC	1	
IC4016	COFBBD000195	IC	1	
IC4021	COJBAPO00020	IC	1	
IC4024	CODBZFG00055	IC	1	
IC4025	COCBCACO0275	IC	1	
IC4041	COCBCACO0275	IC	1	
IC4042	CODBEJG00001	IC	1	
IC4044	COCBCACOO136	IC	1	
IC4048	CODBEJG00001	IC	1	
IC4049	COCBCBF00009	IC	1	
IC4051	C1ZBZ0002790	IC	1	
IC4054	C1AB00002234	IC	1	
IC4055	СЗАВОЈ000040	IC	1	
IC4063	C0EBC0000150	IC	1	
IC5601, 02	NOBF2DE00001	DC-DC CONVERTER	2	

7.6		D. 1 37	<b>-</b>	
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC5803	CODAEZHO0017	IC	1	
IC6001-	C0ZBZ0000895	IC	3	
03	C02B20000893		3	
IC6004	C0ZBZ0001033	IC	1	
IC6005	NJM2903M	INTEGRATED CIRCUIT	1	
IC6006	C0JBAZ000005	IC	1	
IC6011	AN1431M	LINEAR IC	1	
IC6451	AN1431M	LINEAR IC	1	
IC6452,	COCBALCO0010	IC	2	
53				
IC6454, 55	COCBADC00075	IC	2	
IC6456	AN1431M	LINEAR IC	1	
IC6471,	AN1431M	LINEAR IC	2	
72				
IC6491	AN1431M	LINEAR IC	1	
IC6501,	C0JBAZ000994	IC	2	
02				
IC6511	C0ZBZ0001033	IC	1	
IC6512	C0CBADC00075	IC	1	
IC6521	C0ZBZ0001033	IC	1	
IC6541,	C0ZBZ0001033	IC	2	
42	COCRADGOCCE	TC	-1	
IC6543	COCBADCO0075	IC	1	
IC6581	NJM2903M	INTEGRATED CIRCUIT	1	
IC6601, 02	C0ZBZ0000895	IC	2	
IC6605, 06	C0JBAZ000005	IC	2	
IC6607	C0JBAA000174	IC	1	
IC6901- 04	AN16021A-VT	IC	4	
	AN16021A-VT	IC	4	
IC7101	C0JBAZ001120	IC	1	
IC7104-	C0JBAZ001120	IC	3	
06				
IC7201- 04	C0JBAZ001120	IC	4	
IC9001	TVRN460-1	IC	1	
IC9003	C2CBJG000660	IC	1	
IC9004	C0EBE0000120	IC	1	
IC9005, 06	C0JBAZ000856	IC	2	
IC9007	TVRN462	IC	1	
IC9008	C0DBEJG00001	IC	1	
IC9200	C1ZBZ0002769	IC	1	
IC9300	MN84512-A	IC	1	
IC9301	PST9128NR	IC (LOGIC)	1	
IC9302	C3ABQJ000031	IC	1	
IC9303	TVRN461-1	IC	1	
IC9500	C1ZBZ0002599	IC	1	
IC9502	C0JBAZ000856	IC	1	
IC9504	C0JBAZ000856	IC	1	
IC9700	C0DBEJG00001	IC	1	
IC9702	C0DBAZH00020	IC	1	
JK3100A	TJB0A639	TERMINAL	1	
70010	ED 130E**^	M. O. OTTM. 1 /1 CTT	-	
JS012	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS027	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS1000 JS1177	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	1	
JS2003 JS2026	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2031-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS2101,	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
02 JS2105,	ERJ3GEY0R00	м 0 ОНМ, 1/16W	2	
06				
JS2108	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2109	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS2111	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2114,	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
15	l			<u> </u>

Ref.	Part No.	Part Name &	Pcs	Remarks
	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
11				
JS2315 JS2317-	ERJ3GEY0R00	M 0 OHM, 1/16W	1 8	
24	ERJ6GEY0R00	M 0 OHM, 1/10W	,	
JS2329- 32	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS3001	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3010- 15	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
	ERJ3GEY0R00	м 0 ОНМ, 1/16W	2	
JS3202	J0JCC0000241	CHIP INDUCTOR	1	
JS3205	J0JCC0000241	CHIP INDUCTOR	1	
JS3206	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3208	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3244,	J0JCC0000241	CHIP INDUCTOR	2	
45 JS3248	ED TECEVODOO	M O OUM 1/10W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W		
JS3252 JS3255	ERJ6GEY0R00	M 0 OHM, 1/10W M 0 OHM, 1/10W	1	
JS3255 JS3265	ERJ6GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
04		·	11	
37	ERJ3GEY0R00	M 0 OHM, 1/16W	11	
45	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
JS3354- 57	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
JS3359	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3366- 68	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS3401- 08	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
JS3422- 24	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4002	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4004- 09	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
JS4012- 14	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4022, 23	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS4027- 30	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
JS4081	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4084 JS4087-	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	1 6	
92 JS4095,	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
96	ED 1205-00	N 0 0ms 1/55	_	
JS4901	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5602 JS5609-	ERJ3GEY0R00 ERJ6GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/10W	4	
12 JS5801,	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
02	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
08		M 0 OHM, 1/10W	9	
18	ERJ6GEY0R00	M 0 OHM, 1/10W	<i>3</i>	
K1	K1KA12BA0053	12P CONNECTOR	1	
L001	J0JGC0000021	CHIP INDUCTOR COIL	1	
L004,05	J0JHC0000078	CHIP INDUCTOR	2	
	EXC3BB221H	BEAD CHOKE	1	
L007	J0JCC0000241	CHIP INDUCTOR	4	
L007 L008-11				
	J0JCC0000241	CHIP INDUCTOR	1	
L008-11 L013 L015	J0JCC0000241 J0JGC0000021	CHIP INDUCTOR COIL	1	
L008-11 L013 L015 L018,19	J0JCC0000241 J0JGC0000021 J0JHC0000078	CHIP INDUCTOR COIL CHIP INDUCTOR	1 2	
L008-11 L013 L015 L018,19 L021,22	J0JCC0000241 J0JGC0000021 J0JHC0000078 J0JCC0000241	CHIP INDUCTOR COIL CHIP INDUCTOR CHIP INDUCTOR	1 2 2	
L008-11 L013 L015 L018,19	J0JCC0000241 J0JGC0000021 J0JHC0000078	CHIP INDUCTOR COIL CHIP INDUCTOR	1 2	

D-f	Doct 37	Down Marine	D- 1	De1
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	J0JGC0000021	CHIP INDUCTOR COIL	1	
		CHIP INDUCTOR	1	
L1110-	J0JHC0000078	CHIP INDUCTOR	5	
14				
		CHIP INDUCTOR	1	
L1170	J0JHC0000078	CHIP INDUCTOR	1	
	ELJFA8R2KB	CHIP INDUCTOR	1	
		CHIP INDUCTOR	1	
L1175,7	J0JHC0000078	CHIP INDUCTOR	2	
	EXC3BB221H	BEAD CHOKE	2	
_	EXC3BB221H	BEAD CHOKE	2	
F	EXC3BB221H	BEAD CHOKE	2	
L2015,1	EXC3BB221H	BEAD CHOKE	2	
L2107,0	J0JCC0000241	CHIP INDUCTOR	2	
-	TSK1032	BEAD CHOKE	2	
L2111,1 2	J0JCC0000241	CHIP INDUCTOR	2	
	TSK1032	BEAD CHOKE	2	
L2115,1	J0JCC0000241	CHIP INDUCTOR	2	
L2117	ELESE6R8KA	PEAKING COIL	1	
L2118	EXCELDR35C	BEAD CHOKE	1	
L2120	J0JCC0000241	CHIP INDUCTOR	1	
L2121	EXCELDR35C	BEAD CHOKE	1	
L2122	TSK1032	BEAD CHOKE	1	
L2123	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L2178,7 9	J0JCC0000241	CHIP INDUCTOR	2	
L2182- 87	J0JCC0000241	CHIP INDUCTOR	6	
L2204	J0JCC0000241	CHIP INDUCTOR	1	
L2305,0 6	G0A100ZA0033	CHOKE COIL	2	
L2312,1 3	G0A100ZA0033	CHOKE COIL	2	
L2316- 19	J0JJC0000011	CHIP INDUCTOR	4	
L3001- 03	EXC3BB221H	BEAD CHOKE	3	
L3009	J0JCC0000241	CHIP INDUCTOR	1	
L3010	EXC3BB221H	BEAD CHOKE	1	
L3011	ELJPA100KB	CHIP INDUCTOR	1	
L3013	EXC3BB221H	BEAD CHOKE	1	
L3211	ELJNC15NKB	CHIP COIL	1	
L3212 L3213	EXC3BB221H ELJNC15NKB	BEAD CHOKE	1	
L3213	J0JCC0000364	CHIP COIL	1	
L3214	J0JGC0000304	CHIP INDUCTOR COIL	1	
L3217	J0JCC0000364	CHIP INDUCTOR	1	
L3219	J0JGC0000021	CHIP INDUCTOR COIL	1	
L4001	Ј0ЈНС0000078	CHIP INDUCTOR	1	
L4003,0 4	Ј0ЈНС0000078	CHIP INDUCTOR	2	
L4006- 08	Ј0ЈНС0000078	CHIP INDUCTOR	3	
L4104	J0JCC0000241	CHIP INDUCTOR	1	
L4105	J0JHC0000078	CHIP INDUCTOR	1	
L4106	J0JCC0000241	CHIP INDUCTOR	1	
L4151	J0JCC0000241	CHIP INDUCTOR	1	
L4231	J0JCC0000241	CHIP INDUCTOR	1	
L4301	J0JHC0000078	CHIP INDUCTOR	1	
L4341- 43	J0JHC0000078	CHIP INDUCTOR	3	
L4344	J0JCC0000241	CHIP INDUCTOR	1	
L4345	J0JHC0000078	CHIP INDUCTOR	1	
L4346 L4347,4	J0JCC0000241	CHIP INDUCTOR COIL	2	
8 L4350	J0JHC0000078		1	
T-220	000EC0000078	CHIP INDUCTOR		L

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L4501	J0JHC0000078	CHIP INDUCTOR	1	
L4503,0	Ј0ЈНС0000078	CHIP INDUCTOR	2	
14505	J0JCC0000241	CHIP INDUCTOR	1	
L4506	J0JHC0000078	CHIP INDUCTOR	1	
L4508,0 9	Ј0ЈНС0000078	CHIP INDUCTOR	2	
L4510 L4511	J0JCC0000241	CHIP INDUCTOR	1	
L4511 L4701	J0JHC0000078 J0JHC0000078	CHIP INDUCTOR	1	
L4751	J0JCC0000241	CHIP INDUCTOR	1	
L4801- 03	Ј0ЈНС0000078	CHIP INDUCTOR	3	
L4861,6 2	Ј0ЈНС0000078	CHIP INDUCTOR	2	
L4900	J0JHC0000078	CHIP INDUCTOR	1	
L5604	G0A470GA0002	CHOKE COIL	1	
L5605	G1C1R0MA0072	CHOKE COIL	1	
L5606 L5607	TALL08N120KA G0C101K00023	PEAKING COIL	1	
L5608	G1C100MA0072	CHOKE COIL	1	
L5609	TALLO8N120KA	INDUCTION COIL	1	
L5610	G1C470MA0077	INDUCTION COIL	1	
L5611	G1A470ZA0007	CHOKE COIL	1	
L5612	G0A220GA0002	CHOKE COIL	1	
L5613,1 4	G1A470ZA0007	CHOKE COIL	2	
L5615	G0A220GA0002	CHOKE COIL	1	
L5616	G1A470ZA0007	CHOKE COIL	1	
L5808	G0A100GA0013	CHOKE COIL	1	
L5810 L6002-	G0ZZ00002183	CHOKE COIL PEAKING COIL	3	
04 L6005	G0C101K00023	PEAKING COIL	1	
L6011-	G0AR60MA0003	CHOKE COIL	3	
13 L6014	G0A1R0MA0003	CHOKE COIL	1	
L6014	GOA1ROMA0003	CHOKE COIL	+ + +	
L6017,1 8	J0JJC0000021	CHIP INDUCTOR	2	
L6019	G0ZZ00002183	PEAKING COIL	1	
L6022 L6024-	J0JJC0000021 G0ZZ00002183	CHIP INDUCTOR PEAKING COIL	1 4	
27	G0ZZ00002183		4	
37 L6042,4	J0JJC0000021	CHIP INDUCTOR	2	
3				
L6047 L6050	J0JJC0000021 G0ZZ00002183	CHIP INDUCTOR PEAKING COIL	1	
L6451	J0JJC000021	CHIP INDUCTOR	1	
L6453	J0JJC0000021	CHIP INDUCTOR	1	
L6471	J0JJC0000021	CHIP INDUCTOR	1	
L6472	G0ZZ00002183	PEAKING COIL	1	
L6602 L6604,0	G0ZZ00002183	PEAKING COIL PEAKING COIL	2	
5 L6611-	G0AR60MA0003	CHOKE COIL	3	
13 L6614	G0A1R0MA0003	CHOKE COIL	1	
L6616	G0A1R0MA0003	CHOKE COIL	1	
L6618	J0JJC0000021	CHIP INDUCTOR	1	
L6624- 27	G0ZZ00002183	PEAKING COIL	4	
L6634- 37	G0ZZ00002183	PEAKING COIL	4	
L6647	J0JJC0000021	CHIP INDUCTOR	1	
L9200	G1C150KA0038	INDUCTION COIL	1	
L9500,0 1	Ј0ЈНС0000078	CHIP INDUCTOR	2	
<b>L9700</b>	G1C4R3M00003	CHIP INDUCTOR	1	
L9701	G1C6R8M00009	CHIP INDUCTOR	1	
LL6605	G0ZZ00002183	PEAKING COIL	1	
PA7	K1KA08AA0192	8P CONNECTOR	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	FAIC NO.	Description	FCS	Remarks
PA10	K1KA06A00452	6P CONNECTOR	1	
PA20	K1MN30A00068	30P CONNECTOR	1	
PA30	K1MN30A00068	30P CONNECTOR	1	
PA5601,	K5H4022A0023	FUSE	2	
02				
PB5	K1KA11AA0194	11P CONNECTOR	1	
PB7	K1KA08AA0192	8P CONNECTOR	1	
PC6458	B3PBA0000223	IC	1	
PC6467	B3PBA0000223	IC	1	
PC6469	B3PBA0000223	IC	1	
PC6474	B3PBA0000223	IC	1	
PC6480	B3PBA0000223	IC	1	
PC6503	B3PBA0000233	IC	1	
PC6505	B3PBA0000233	IC	1	
PC6507	B3PBA0000233	IC	1	
PC6509,	B3PBA0000234	IC	2	
10			<u> </u>	
PC6517	B3PBA0000223	IC	1	
	006		$\vdash$	
Q1170	2SA207700L	TRANSISTOR	1	
Q1172	2SD601A	TRANSISTOR	1	
Q1174,7	2SD601A	TRANSISTOR	2	
5	TTATE 0.1.1	MD ANG TOWN	$\vdash$	
Q1176	UN5211	TRANSISTOR	1	
Q1177	UN5111	TRANSISTOR	1	
Q1178	UN5211	TRANSISTOR	1	
Q1180	UN5211	TRANSISTOR	1	
Q1182	2SD601A	TRANSISTOR	1	
Q1184	2SD601A	TRANSISTOR	1	
Q1200	2SD601A	TRANSISTOR	1	
Q2001,0	2SD601A	TRANSISTOR	2	
2	0		-	
Q2011	2SB709A	TRANSISTOR	1	
Q2012	2SD601A	TRANSISTOR	1	
Q2013	2SB709A	TRANSISTOR	1	
Q2102-	2SB709A	TRANSISTOR	4	
05 Q2300	2SC584500L	TRANSISTOR	1	
Q2301	2SD601A	TRANSISTOR	1	
Q2302	2SC584500L	TRANSISTOR	1	
02314-	2SC584500L	TRANSISTOR	4	
17	2303043001	TRANSISION	*	
Q2323	2SA207700L	TRANSISTOR	1	
Q2324	2SC584500L	TRANSISTOR	1	
Q2510,1	2SD601A	TRANSISTOR	2	
1	20000111	TIGHOTOTOK	~	
Q2519	2SB709A	TRANSISTOR	1	
Q3002	2SB709A	TRANSISTOR	1	
Q3008	2SB709A	TRANSISTOR	1	
Q3009	2SD601A	TRANSISTOR	1	
Q3010-	2SB709A	TRANSISTOR	6	
15				
Q3017,1	2SB709A	TRANSISTOR	2	
8				
Q3024	2SB709A	TRANSISTOR	1	
Q3204-	2SD601A	TRANSISTOR	4	
07				
Q3208-	2SB709A	TRANSISTOR	4	
11	2006013	MD ANGTOMOD	-	
Q4006	2SD601A	TRANSISTOR	1	
Q4010- 12	2SD601A	TRANSISTOR	3	
	2SA207700L	TRANSISTOR	1	
Q4013			1	
Q4015	2SB1218ARL	TRANSISTOR	<del>                                     </del>	
Q4016	2SA207700L	TRANSISTOR	1	
Q4068	2SD601A	TRANSISTOR	1	
Q4101	2SD601A	TRANSISTOR	1	
Q4103,0 4	2SD601A	TRANSISTOR	2	
Q4106,0	2SD601A	TRANSISTOR	2	
7				
Q4109-	2SD601A	TRANSISTOR	4	
12				

Ref.	Don't No	Dont Name C	l Baa l	Domo mla o
No.	Part No.	Part Name & Description	Pcs	Remarks
Q4301- 03	2SD601A	TRANSISTOR	3	
Q4306- 08	2SA207700L	TRANSISTOR	3	
Q4309	2SD1030	TRANSISTOR	1	
Q4310,1 1	2SD601A	TRANSISTOR	2	
Q4900	2SD601A	TRANSISTOR	1	
Q5601	B1DHDC000028	TRANSISTOR	1 1	
Q5602 Q5603	2SC584500L B1DHDC000028	TRANSISTOR TRANSISTOR	1	
Q5604,0	2SC584500L	TRANSISTOR	2	
5			<b> </b>	
Q5606	B1DHDC000028	TRANSISTOR	1 1	
Q5607	2SC584500L 2SC584500L	TRANSISTOR TRANSISTOR	1 1	
Q5613 Q5614	2SK3065T100	FET	1	
Q5641-	2SA207700L	TRANSISTOR	3	
43	2005045007	MD ANG TOMOD		
Q5644 Q6001-	2SC584500L B1JADN000001	TRANSISTOR TRANSISTOR	3	
03				
Q6006- 08	B1JADN000001	TRANSISTOR	3	
Q6011	2SD2185	TRANSISTOR	1	
Q6012	2SB1073001TV	TRANSISTOR	1	
Q6013	2SD2185	TRANSISTOR	1	
Q6014	2SB1073001TV	TRANSISTOR	1	
Q6021 Q6024	2SK3996000VP 2SK3996000VP	FET	1 1	
Q6024 Q6025	2SK620	FET	1	
Q6041,4	2SK373100L	FET	2	
2 Q6045	2SK326800L	FET	1	
Q6045	2SK373100L	FET	1	
Q6051	2SD1263A	TRANSISTOR	1	
Q6052	2SC1473A	TRANSISTOR	1	
Q6056	2SD601A	TRANSISTOR	1	
Q6451	2SD1263A	TRANSISTOR	1	
Q6454	2SC1473A	TRANSISTOR	1	
Q6461	B1BBCJ000004	TRANSISTOR	1	
Q6462	2SB0709A	TRANSISTOR	1	
Q6463 Q6471	2SD601A B1BBCJ000004	TRANSISTOR TRANSISTOR	1 1	
Q6471 Q6472	2SB0709A	TRANSISTOR	1	
Q6474	2SD814A	TRANSISTOR	1	
Q6476,7	2SD601A	TRANSISTOR	2	
Q6491	2SD1263A	TRANSISTOR	1	
Q6492	2SC1473A	TRANSISTOR	1	
Q6501- 05	2SK620	FET	5	
Q6511,1 2	B1DFGL000008	TRANSISTOR	2	
Q6520	2SD601A	TRANSISTOR	1	
Q6521	B1DFES000002	TRANSISTOR	1	
Q6522- 28	2SK400000L	FET	7	
Q6530	2SB1073001TV	TRANSISTOR	1	
Q6541	2SB1073001TV	TRANSISTOR	1	
Q6542	2SK399500L	FET	1	
Q6544- 46	2SK399500L	FET	3	
Q6548	2SK399500L	FET	1	
Q6551	2SD601A	TRANSISTOR	1	
Q6552	B1DEET000002	TRANSISTOR	1 1	
Q6553 Q6554	2SB1073001TV 2SD2185	TRANSISTOR TRANSISTOR	1	
Q6555	B1DFES000002	TRANSISTOR	1	
Q6581	2SD601A	TRANSISTOR	1	
Q6583,8 4	2SK620	FET	2	
Q6601- 03	B1JADN000001	TRANSISTOR	3	
Q6606-	B1JADN000001	TRANSISTOR	3	
08	<u> </u>		1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
Q6611	2SD2185	TRANSISTOR	1	
Q6612	2SB1073001TV	TRANSISTOR	1	
Q6613	2SD2185	TRANSISTOR	1	
Q6614	2SB1073001TV	TRANSISTOR	1	
Q6621	2SK3996000VP	FET	1	
Q6624	2SK3996000VP	FET	1	
Q6901	2SK620	FET	1	
Q9000,0 1	2SD601A	TRANSISTOR	2	
Q9003	B1DHCC000034	TRANSISTOR	1	
Q9004	2SB709A	TRANSISTOR	1	
Q9008,0 9	2SK2731T146	FET	2	
Q9010,1	2SD601A	TRANSISTOR	2	
Q9012,1	2SK2731T146	FET	2	
Q9020- 23	2SD601A	TRANSISTOR	4	
Q9500	2SK2731T146	FET	1	
Q9700	2SD601A	TRANSISTOR	1	
Q9701,0	B1MBCDA00002	TRANSISTOR	2	
2 Q9703,0	2SD601A	TRANSISTOR	2	
4	200 601 7	mpanaramon	_	
Q9900,0 1	2SD601A	TRANSISTOR	2	
<del></del>	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R011,12	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R013,14	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1110,1 1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1115	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1123	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R1125	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R1127	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R1134	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R1146	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1149	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R1168	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1170	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1171	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R1172	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R1173	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1175	ERJ3GEYJ392	м 3.9KOHM, J, 1/16W	1	
R1177	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R1178	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R1180	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1185	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1186	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R1187	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1188	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R1189	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1190- 97	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R1199	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1200	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1201	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1202-	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
04				
R1206	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1208,0 9	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1213	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R1214	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R1215	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R1216	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1219	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1221	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1222	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1224- 26	ERJ3GEYJ683	м 68KOHM,J,1/16W	3	
R1227	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1228	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
		. , , = , =		

Ref.	Part No.	Part Name &	Pcs	Remarks
No. R1229	ED 13CEVODOO	Description	1	
	ERJ3GEY0R00 ERJ3GEYJ104	M 0 OHM, 1/16W M 100KOHM,J,1/16W	1	
	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
<b>—</b>	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1238	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1240	EXB2HV680J	RESISTOR ARRAY	1	
R1242,4	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R1244	EXB38V680J	RESISTOR ARRAY	1	
	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R1250	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R1251	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1253	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1255	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R1258	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R1263	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
	EXB2HV680J	RESISTOR ARRAY	1	
-	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
	EXB2HV680J	RESISTOR ARRAY	1	
	ERJ3GEYJ820	M 82 OHM, J, 1/16W	1	
t	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1272,7 3	D1HG5608A002	NETWORK RESISTER	2	
		M 0 OHM, 1/16W	1	
	тајаан0101ју	M 100 OHM, J, 1/16W	1	
	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1280,8 1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1285,8 6	TAJAAH0680JV	M 68 OHM,J,1/16W	2	
		M 100 OHM, J, 1/16W	1	
<b></b>	TAJAAH0680JV	M 68 OHM, J, 1/16W	1	
R1289,9 0	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R1291- 94	тајаан0101ју	M 100 OHM,J,1/16W	4	
<del>                                     </del>	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
		M 100 OHM, J, 1/16W	1	
t	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
H + + + + + + + + + + + + + + + + + + +	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
H + + + + + + + + + + + + + + + + + + +	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
<del>                                     </del>	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
	ERJ3GEYJ102 TAJAAH0680JV	M 1KOHM,J,1/16W M 68 OHM,J,1/16W	2	
9				
H + + + + + + + + + + + + + + + + + + +	ERJ3GEYJ201	M 200 OHM, J, 1/16W	1	
<del>                                     </del>	TAJAAH0101JV ERJ3GEYJ103	M 100 OHM,J,1/16W M 10KOHM,J,1/16W	2	
7				
	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
- t	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
H + + + + + + + + + + + + + + + + + + +	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
4	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	2	
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1326,2 7				
7 R1329	ERJ3GEY0R00	м 0 ОНМ, 1/16W	1	
7 R1329	ERJ3GEY0R00 TAJAAH0101JV	M 0 OHM, 1/16W M 100 OHM, J, 1/16W	1 2	
7 R1329 R1330,3			_	
7 R1329 R1330,3 1 R1332,3 3	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
7 R1329 R1330,3 1 R1332,3 3 R1334	TAJAAH0101JV ERJ3GEY0R00	M 100 OHM, J,1/16W M 0 OHM, 1/16W	2	
7 R1329 R1330,3 1 R1332,3 3 R1334 R1336,3 7	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ473	M 100 OHM,J,1/16W M 0 OHM, 1/16W M 47KOHM,J,1/16W	2 2 1	
7 R1329 R1330,3 1 R1332,3 3 R1334 R1336,3 7	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ473 ERJ3GEY0R00	M 100 OHM, J, 1/16W  M 0 OHM, 1/16W  M 47KOHM, J, 1/16W  M 0 OHM, 1/16W	2 2 1 2	

Ref. No.	Part No.	Part Name &	Pcs	Remarks
R1343,4	ERJ3GEYJ332	Description M 3.3KOHM,J,1/16W	2	
4 D1245 4	ERJ3GEYJ103	M 1000HM T 1/16W	2	
R1345,4	ERU3GE10103	M 10KOHM,J,1/16W		
R1347,4 8	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R1351	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R1355	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R1359,6	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
0 R1361	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1365,6	EXB2HV680J	RESISTOR ARRAY	2	
6	TD TO THE TO S	1 10mom - 1 /1 cm		
R1372- 74	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R1380,8	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R1384	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1389	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R1390	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2005	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2006-	ERJ6GEYJ223	M 22KOHM,J,1/10W	6	
11 R2012	ERJ3GEYJ104	м 100конм, J, 1/16W	1	
R2013,1	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
4 D2015 1	ED 12CEV 1221		2	
R2015,1 6	ERJ3GEYJ331	M 330 OHM,J,1/16W		
R2042	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R2043	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2044	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2045,4 6	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2047	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R2048	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2049,5	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2053	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2054	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2113	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2124,2 5	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2126,2	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R2128,2	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
9 R2130,3	ERJ3GEYJ103	м 10конм, J, 1/16W	2	
1	ED 1305 100	w 22moms = 1/1/	-	
R2132	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2133 R2137	ERJ3GEY0R00 ERJ3GEYJ333	M 0 OHM, 1/16W M 33KOHM,J,1/16W	1	
R2137	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2147	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R2148,4	ERJ3GEYJ273	M 27KOHM, J, 1/16W	2	
9	ED 1205-00	M 0 0ms 1/55-		
R2151	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2152	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R2153 R2154	ERJ3GEYJ221 TAJAAH0470JV	M 220 OHM,J,1/16W M 47 OHM,J,1/16W	1	
R2155,5	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
6		,, 2, 2, 2011		
R2158	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2164	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2165,6 6	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2167	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2168,6	ERJ3GEYJ472	м 4.7конм, ј, 1/16w	2	
R2172,7	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
3 R2180	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R2182,8	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
3				
R2184-	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2192,9 3	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	

		1		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2195,9	J0JCC0000241	CHIP INDUCTOR	2	
R2197	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2198	ERJ6ENF1781	M1.78KOHM, 1/10W	1	
R2200	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2201	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R2202	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2224,2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
5 R2302	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2303	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R2304	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2305	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R2306	ERJ6GEYJ821	M 820 OHM, J, 1/10W	1	
R2307	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2308,0	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	2	
R2310	ERJ3GEYJ184	M 180KOHM, J, 1/16W	1	
R2311	ERJ12YJ821	M 820 OHM,J, 1/2W	1	
R2312,1	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
3				
R2314,1 5	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R2320	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R2321	ERJ3GEYJ393	м 39КОНМ, J, 1/16W	1	
R2322	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2323	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2324	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2325	ERJ3GEYJ913	M 91KOHM,J,1/16W	1	
R2326	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2328	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2329	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R2330	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R2331	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R2332	ERJ3GEYJ913	M 91KOHM,J,1/16W	1	
R2335	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2336	ERJ3GEYJ393	м 39КОНМ, J, 1/16W	1	
R2337	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R2338	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2339	ERJ3GEYJ913	M 91KOHM,J,1/16W	1	
R2342,4 3	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2344	ERJ3GEYJ913	M 91KOHM,J,1/16W	1	
R2345,4	ERJ3GEYJ563	M 56KOHM,J,1/16W	2	
6 R2377,7	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
8 R2381,8	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
2				
R2388,8 9	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R2390	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R2391	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2392	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2393	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2394	ERJ3GEYJ203	M 20KOHM, J, 1/16W	1	
R2395,9 6	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2397,9 8	ERJ3GEYJ473	м 47КОНМ, J, 1/16W	2	
R2412	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2414	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2437,3	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
8 R2444,4	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
5 R2448,4	ERJ6GEYJ510	M 51 OHM,J,1/10W	2	
9				
R2450	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2451,5 2	ERJ6GEYJ510	M 51 OHM,J,1/10W	2	
R2453	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2460	ERJ6ENF1373	M 137KOHM, 1/10W	1	
R2461	ERJ6ENF1103	M 110KOHM, 1/10W	1	
R2464,6	ERJ6GEYJ120	M 12 OHM,J,1/10W	2	
5				

		ı	_	
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R2468,6	ERJ6GEYJ112	M 1.1KOHM,J,1/10W	2	
9				
R2488,8	ERJ6GEYJ120	M 12 OHM,J,1/10W	2	
9	210000210120	12 0111/0/1/1011	_	
		14 A THOMA T 1/1/07	-	
R2499	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2516	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2517	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2520	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R2524	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2525	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R2526	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
			1	
R2542	ERJ6GEYJ101	M 100 OHM,J,1/10W		
R2545	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2550	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2553	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	t			
R2557	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
R3001-	ERJ6ENF75R0	M 75 OHM, 1/10W	10	
10				
R3012	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
	<b>†</b>			
R3020	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R3021,2	ERJ3GEYJ103	м 10конм, J, 1/16W	2	
2				
R3027	ERJ6ENF75R0	м 75 ОНМ, 1/10W	1	
R3039	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
5				
R3047	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3048	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R3049-	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
51				
R3053	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3054	ERJ3GEY0R00	м 0 ОНМ, 1/16W	1	
	ED 13EKEE 600	· ·	1	
R3055	ERJ3EKF5600	M 560 OHM, 1/16W		
R3057,5	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
8				
R3059	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3064	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3065	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3067	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R3069	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R3071	ERJ3GEYJ103	м 10КОНМ, J, 1/16W	1	
	<b>†</b>			
R3074,7	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
5				
R3076	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3086	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3087	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3089,9	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
0				
R3092	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R3094,9	ERUJGETUZZI	M 220 OHM, 5,1/10W	_	
R3099-	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
02				
R3115-	TAJAAH0101JV	M 100 OHM,J,1/16W	4	
18				
R3119,2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
0			_	
	ED 135551 000	M 100 OW 1/10	1	
R3121	ERJ3EKF1000	M 100 OHM, 1/16W	1	
R3122	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R3123	ERJ3EKF82R0	M 82 OHM, 1/16W	1	
R3124	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R3125	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3126	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R3127	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3128	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	1	
R3129	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R3130	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3131	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3132	ERJ3EKF5600	M 560 OHM, 1/16W	1	
R3133	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3134	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R3135	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3138	ERJ3EKF82R0	M 82 OHM, 1/16W	1	
R3139	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R3140	ERJ3EKF1000	M 100 OHM, 1/16W	1	
R3141	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R3142	ERJ6GEYJ152	M 1.5KOHM, J, 1/16W	2	
R3152,5	TAJAAHU4/UJV	M 47 OHM, J, 1/16W	2	
R3158	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R3159	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R3164	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R3166,6 7	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R3206	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R3213-	ERJ3GEY0R00	M 0 OHM, 1/16W	10	
22		·		
R3224- 29	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3237	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R3238- 45	ERJ3GEYJ103	M 10KOHM,J,1/16W	8	
R3246	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3247	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3249	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
1 R3252,5	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
3			-	
R3254	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3255	ERJ6GEYJ561	M 560 OHM, J, 1/16W	1	
R3256	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3257 R3258-	ERJ3GEYJ472 ERJ3GEY0R00	M 4.7KOHM,J,1/16W M 0 OHM, 1/16W	7	
64	FEORETOROU	I O OHM, I/IOW		
R3320	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3323,2 4	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R3401- 07	ERJ6GEY0R00	M 0 OHM, 1/10W	7	
R3408,0 9	ERJ3GEYJ361	M 360 OHM,J,1/16W	2	
R3750	ERJ6ENF6802	M 68KOHM, 1/10W	1	
R3751	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R3752	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3753	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
R3754	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R4001	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4014 R4016,1	ERJ3EKF1500 ERJ3EKF5760	M 150 OHM, 1/16W M 576 OHM, 1/16W	2	
7				
R4027 R4029,3	ERJ3EKF1500 ERJ3EKF1581	M 150 OHM, 1/16W M1.58KOHM, 1/10W	2	
0	ERUSERF 1561	MI. JOKOHM, 1/10W		
R4031	ERJ3EKF4220	M 422 OHM, 1/10W	1	
R4033	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4035,3 6	ERJ3EKF3001	M 3KOHM, 1/16W	2	
R4037	ERJ3EKF5600	M 560 OHM, 1/16W	1	
R4039	ERJ3EKF4220	M 422 OHM, 1/10W	1	
R4041	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R4043,4 4	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R4045	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4046	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R4047	ERJ3EKF5600	M 560 OHM, 1/16W	1	
R4049	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4050	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R4051,5 2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4053	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R4054	ERJ3EKF1600	M 160 OHM, 1/16W	1	
R4055	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4056,5	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R4059	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R4060	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4062	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4064	ERJ3EKF1371	M 13.7 OHM, 1/16W	1	
R4068	ERJ3EKF1691	M1.69KOHM, 1/16W	1	

Ref. No.	Part No.	Part Name &	Pcs	Remarks
R4069-	ERJ3GEYJ220	M 22 OHM,J,1/16W	4	
72				
R4075	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4076,7	EXB38V220J	RESISTOR ARRAY	2	
R4078	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4079-	EXB38V220J	RESISTOR ARRAY	3	
81	== =2 === = = = = = = = = = = = = = = =	14 00 0m4 T 1/16T	_	
R4082- 84	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R4086-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
88		1/1/2	_	
R4091- 95	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4100	ERJ3GEYJ183	м 18КОНМ, J, 1/16W	1	
R4101	ERJ3GEYJ822	M 8.2KOHM, J, 1/16W	1	
R4102	ERJ3GEYJ183	M 18KOHM, J, 1/16W	1	
R4103	ERJ3GEYJ822	M 8.2KOHM, J, 1/16W	1	
R4104 R4106	ERJ3GEYJ183 ERJ3GEYJ822	M 18KOHM,J,1/16W M 8.2KOHM,J,1/16W	1	
R4107-	ERJ3GEYJ330	M 33 OHM, J, 1/16W	3	
09		, , .		
R4110	ERJ3GEYJ751	M 750 OHM,J,1/16W	1	
R4111 R4112	ERJ3EKF5601 ERJ3GEYJ751	M 5.6KOHM, 1/16W	1	
R4112 R4113	ERJ3GEYJ751 ERJ3EKF5601	M 750 OHM,J,1/16W M 5.6KOHM, 1/16W	1	
R4113	ERJ3EKF5601 ERJ3GEYJ751	M 750 OHM, J, 1/16W	1	
R4115	ERJ3EKF5601	M 5.6KOHM, 1/16W	1	
R4117	ERJ6ENF5600	M 560 OHM, 1/10W	1	
R4118	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4120	ERJ6ENF5600	M 560 OHM, 1/10W	1	
R4123	ERJ6ENF5600	M 560 OHM, 1/10W	1	
R4125- 27	ERJ6GEYJ471	M 470 OHM,J,1/10W	3	
R4128	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4130	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4132	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4134- 36	TAJAAH0680JV	M 68 OHM,J,1/16W	3	
R4137-	ERJ3GEYJ330	M 33 OHM,J,1/16W	3	
39 R4140	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4143	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4144-	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	
46				
R4147- 49	ERJ3GEYJ153	M 15KOHM,J,1/16W	3	
R4150	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4151,5	ERJ3EKF2200	M 220 OHM, 1/16W	2	
2 R4153	ERJ3EKF1020	M 102 OHM, 1/16W	1	
R4153	ERJ3GEYJ220	M 22 OHM, J,1/16W	1	
R4155	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4157,5	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
8 R4159	ERJ3EKF1200	M 120 OHM, 1/16W	1	
R4159	ERJ3EKF1020	M 102 OHM, 1/16W	1	
R4161	ERJ3EKF1200	M 120 OHM, 1/16W	1	
R4163	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4165	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R4167	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4169 R4173	ERJ3GEY0R00 ERJ3GEYJ271	M 0 OHM, 1/16W M 270 OHM,J,1/16W	1	
R4174,7	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
5		,		
R4177	TAJAAH0680JV	M 68 OHM, J, 1/16W	1	
R4182	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4184 R4186	TAJAAH0680JV ERJ3GEY0R00	M 68 OHM, J, 1/16W M 0 OHM, 1/16W	1	
R4188	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4194-	TAJAAH0680JV	M 68 OHM, J, 1/16W	4	
97	TD 707	v 100 cm - 5 /5 cm		
R4199 R4203	ERJ3EKF1200 ERJ3EKF1020	M 120 OHM, 1/16W M 102 OHM, 1/16W	1	
R4203	ERJ3GEYJ510	M 51 OHM, J,1/16W	1	
R4207	ERJ3EKF1500	M 150 OHM, 1/16W	1	
	-	-		

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description	_	
R4208	ERJ3GEYJ510	M 51 OHM, J, 1/16W	1	
R4209	ERJ3EKF2200	M 220 OHM, 1/16W	1	
R4210 R4211	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4211 R4228	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	1	
R4236-	ERJ3GEY0R00	M O OHM, 1/16W	3	
38	EROSGETOROO	H 0 0M1, 1,10W		
R4244	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4249	EXB38V680J	RESISTOR ARRAY	1	
R4253	EXB38V680J	RESISTOR ARRAY	1	
R4255	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4259	EXB38V680J	RESISTOR ARRAY	1	
R4301	ERJ3GEYJ361	M 360 OHM,J,1/16W	1	
R4303	ERJ3GEYJ181	M 180 OHM,J,1/16W	1	
R4305	ERJ3GEYJ181	M 180 OHM,J,1/16W	1	
R4307	ERJ6GEYJ361	M 360 OHM, J, 1/10W	1	
R4308,0 9	ERJ6GEYJ561	M 560 OHM, J, 1/10W	2	
R4315	ERJ3EKF8450	M 845 OHM, 1/16W	1	
R4318,1	ERJ3EKF4700	M 470 OHM, 1/16W	2	
9	_1.0 JHRE 4 / 00	JIM, 1/10W		
R4320,2	ERJ3EKF3601	M 3.6KOHM, 1/16W	2	
1				
R4325	ERJ3EKF1331	M13.3KOHM, 1/16W	1	
R4326,2	ERJ6GEYJ821	M 820 OHM,J,1/10W	2	
7		W 600 6 115	<u> </u>	
R4328	ERJ6GEYJ681	M 680 OHM, J, 1/10W	1 2	
R4329- 31	ERJ3GEYJ330	M 33 OHM,J,1/16W	3	
R4332	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R4333	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4334,3	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	
5				
R4336- 41	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R4342- 44	ERJ3EKF33R0	M 33 OHM, 1/16W	3	
R4345	ERJ3EKF1401	M 1.4KOHM, 1/16W	1	
R4346-	ERJ3EKF33R0	M 33 OHM, 1/16W	3	
48		1 /1 CT		
R4349	ERJ3EKF2701	M 2.7KOHM, 1/16W	1	
R4350 R4351-	ERJ3EKF4700 ERJ3EKF1500	M 470 OHM, 1/16W M 150 OHM, 1/16W	3	
53	EROSERF 1300	M 150 OHM, 1/10W		
R4354	ERJ3EKF1001	M 1KOHM, 1/16W	1	
R4355-	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
59				
R4360	ERJ3GEYJ911	M 910 OHM, J, 1/16W	1	
R4361,6 2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
2 R4363	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4364,6	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
5				
R4367	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4368,6	ERJ3GEYJ560	M 56 OHM,J,1/16W	2	
9				
R4370	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R4372	D1HG5608A002	NETWORK RESISTER	1	
		DEGETORCE	1	
R4373,7	EXB38V560J	RESISTOR ARRAY	2	
R4373,7 4 R4379,8	EXB38V560J ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4373,7 4				
R4373,7 4 R4379,8 0 R4381- 83	ERJ3GEYJ220 ERJ3GEYJ221	M 22 OHM,J,1/16W M 220 OHM,J,1/16W	2	
R4373,7 4 R4379,8 0 R4381- 83 R4501	ERJ3GEYJ220 ERJ3GEYJ221 TAJAAH0470JV	M 22 OHM,J,1/16W  M 220 OHM,J,1/16W  M 47 OHM,J,1/16W	3	
R4373,7 4 R4379,8 0 R4381- 83 R4501 R4502	ERJ3GEYJ220 ERJ3GEYJ221 TAJAAH0470JV ERJ3GEYJ103	M 22 OHM,J,1/16W  M 220 OHM,J,1/16W  M 47 OHM,J,1/16W  M 10KOHM,J,1/16W	2 3 1 1	
R4373,7 4 R4379,8 0 R4381- 83 R4501 R4502 R4503	ERJ3GEYJ220 ERJ3GEYJ221 TAJAAH0470JV ERJ3GEYJ103 ERJ3EKF1202	M 22 OHM, J, 1/16W  M 220 OHM, J, 1/16W  M 47 OHM, J, 1/16W  M 10KOHM, J, 1/16W  M 12KOHM, 1/16W	2 3 1 1	
R4373,7 4 R4379,8 0 R4381- 83 R4501 R4502 R4503 R4504	ERJ3GEYJ220 ERJ3GEYJ221 TAJAAH0470JV ERJ3GEYJ103 ERJ3EKF1202 ERJ3EKF1800	M 22 OHM, J, 1/16W  M 220 OHM, J, 1/16W  M 47 OHM, J, 1/16W  M 10KOHM, J, 1/16W  M 12KOHM, 1/16W  M 180 OHM, 1/16W	2 3 1 1 1 1	
R4373,7 4 R4379,8 0 R4381- 83 R4501 R4502 R4503 R4504 R4505	ERJ3GEYJ220 ERJ3GEYJ221 TAJAAH0470JV ERJ3GEYJ103 ERJ3EKF1202 ERJ3EKF1800 ERJ3EKF2001	M 22 OHM, J, 1/16W  M 220 OHM, J, 1/16W  M 47 OHM, J, 1/16W  M 10KOHM, J, 1/16W  M 12KOHM, 1/16W  M 180 OHM, 1/16W  M 2KOHM, 1/16W	2 3 1 1 1 1	
R4373,7 4 R4379,8 0 R4381- 83 R4501 R4502 R4503 R4504 R4505 R4506	ERJ3GEYJ220 ERJ3GEYJ221 TAJAAH0470JV ERJ3GEYJ103 ERJ3EKF1202 ERJ3EKF1800 ERJ3EKF2001 ERJ3EKF4302	M 22 OHM, J, 1/16W  M 220 OHM, J, 1/16W  M 47 OHM, J, 1/16W  M 10KOHM, J, 1/16W  M 12KOHM, 1/16W  M 180 OHM, 1/16W  M 2KOHM, 1/16W  M 43KOHM, 1/16W	2 3 1 1 1 1 1	
R4373,7 4 R4379,8 0 R4381- 83 R4501 R4502 R4503 R4504 R4505	ERJ3GEYJ220 ERJ3GEYJ221 TAJAAH0470JV ERJ3GEYJ103 ERJ3EKF1202 ERJ3EKF1800 ERJ3EKF2001	M 22 OHM, J, 1/16W  M 220 OHM, J, 1/16W  M 47 OHM, J, 1/16W  M 10KOHM, J, 1/16W  M 12KOHM, 1/16W  M 180 OHM, 1/16W  M 2KOHM, 1/16W	2 3 1 1 1 1	
R4373,7 4 R4379,8 0 R4381- 83 R4501 R4502 R4503 R4504 R4505 R4506 R4508,0	ERJ3GEYJ220 ERJ3GEYJ221 TAJAAH0470JV ERJ3GEYJ103 ERJ3EKF1202 ERJ3EKF1800 ERJ3EKF2001 ERJ3EKF4302	M 22 OHM, J, 1/16W  M 220 OHM, J, 1/16W  M 47 OHM, J, 1/16W  M 10KOHM, J, 1/16W  M 12KOHM, 1/16W  M 180 OHM, 1/16W  M 2KOHM, 1/16W  M 43KOHM, 1/16W	2 3 1 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	ED TOCEVODOO	Description	2	
9	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4520,2	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4522	ERJ3GEYJ750	M 75 OHM,J,1/16W	1	
R4523,2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4525	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4526	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R4527	ERJ3GEYJ393	M 39KOHM, J, 1/16W	1	
R4528	ERJ3EKF1001	M 1KOHM, 1/16W	1	
	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
2 R4533	ERJ3EKF9100	M 910 OHM, 1/16W	1	
	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
5	ZRO SOZI OZZO	11 22 Olla, 0, 1, 10H	_	
R4575,7	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4577,7 8	TAJAAH0680JV	M 68 OHM,J,1/16W	2	
R4583- 03	TAJAAH0680JV	M 68 OHM,J,1/16W	21	
R4604- 06	EXB38V680J	RESISTOR ARRAY	3	
R4609	ERJ3GEY0R00	м 0 ОНМ, 1/16W	1	
R4610- 13	TAJAAH0680JV	M 68 OHM,J,1/16W	4	
R4614- 17	EXB2HV680J	RESISTOR ARRAY	4	
R4618	EXB38V680J	RESISTOR ARRAY	1	
R4619	EXB2HV680J	RESISTOR ARRAY	1	
R4620	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4659	TAJAAH0680JV	M 68 OHM, J, 1/16W	1	
R4661	TAJAAH0680JV	M 68 OHM, J, 1/16W	1	
R4662,6 3	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4664	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4671	EXB38V680J	RESISTOR ARRAY	1	
R4672	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4701,0 2	ERJ3EKF3002	м 30конм, 1/16W	2	
R4704,0 5	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
R4706- 10	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4756- 58	ERJ3GEYJ330	M 33 OHM,J,1/16W	3	
R4759	ERJ3GEYJ510	M 51 OHM,J,1/16W	1	
R4760	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4762	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4763	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4766	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4768 R4769	ERJ3GEY0R00 ERJ3GEYJ151	M 0 OHM, 1/16W M 150 OHM,J,1/16W	1	
R4802	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4805	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4807,0	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R4810	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4821- 23	EXB38VR000	RESISTOR ARRAY	3	
R4834	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4851	ERJ3GEYJ821	M 820 OHM,J,1/16W	1	
R4884	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4887,8	ERJ3GEY0R00	м 0 ОНМ, 1/16W	2	
R4897,9 8	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4920,2 1	J0JCC0000241	CHIP INDUCTOR	2	
R4922- 26	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4927 R4928- 34	J0JCC0000241 ERJ3GEY0R00	CHIP INDUCTOR M 0 OHM, 1/16W	7	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	PAIC NO.	Description	FCS	Remaiks
R4936- 42	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
R4943	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R4944,4 5	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4946	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4947	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4948,4 9	ERJ3EKF3002	M 30KOHM, 1/16W	2	
R4950	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4951	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4952	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R4954,5 5	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R5601	ERJ6ENF4532	M4.53KOHM, 1/10W	1	
R5603	ERJ6ENF2550	M 255 OHM, 1/10W	1	
R5605	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R5606 R5607	ERJ6GEYJ103 ERJ6ENF1871	M 10KOHM, J, 1/10W	1	
R5607	ERJ6ENF1871	M1.87KOHM, 1/10W M1.87KOHM, 1/10W	1	
R5610	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
R5610	ERJ6ENF8202	M 82KOHM, 1/10W	1	
R5612	ERJ6ENF1652	M16.5KOHM, 1/10W	1	
R5615,1	ERJ6GEYJ223	M 22KOHM, J, 1/10W	2	
6 R5617,1	ERJ6GEYJ221	M 220 OHM, J, 1/10W	2	
8				
R5621	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5623,2 4	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R5625- 27	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	3	
R5630	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5632	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5633	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5634	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R5635	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R5636 R5637,3	ERJ6GEYJ471 ERJ6GEYJ103	M 470 OHM,J,1/10W M 10KOHM,J,1/10W	2	
8 R5639	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R5640	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R5641	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5642	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5643	ERJ6GEYJ681	M 680 OHM, J, 1/10W	1	
R5644	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5645,4 6	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R5647	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R5648	ERJ6GEYJ392	M 3.9KOHM, J, 1/10W	1	
R5649 R5650	ERJ6GEYJ104	M 100KOHM, J, 1/10W M 220 OHM, J, 1/10W	1	
R5650	ERJ6GEYJ221 ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5653- 56	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
R5657,5	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R5660	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5662	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5670	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5672	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R5675	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5680	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5692	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5693	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R5694,9 5	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R5696	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R5815	ERJ6ENF3900	M 390 OHM, 1/10W	1	
R5819	ERJ6ENF2941	M2.94KOHM, 1/10W	1	
R5820	ERX3FJSR22D	M 2.2 OHM, J, 3W	1	
R6001 R6002-	ERJ6GEYJ104	M 100KOHM,J,1/10W M 150 OHM,J,1/10W	4	
05	ERJ6GEYJ151			
R6006,0 7	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6008,0	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
9 R6011-	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
16 R6019-	ERJ14YJ150U	M 15 OHM, J,1/4W	4	
22				
R6023	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6024	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6025	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6026	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6027,2 8	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R6029- 31	ERJ6GEYJ103	м 10конм, J, 1/10W	3	
R6033	ERJ14YJ204	M 200KOHM, J,1/4W	1	
R6034,3 5	ERJ14YJ150U	м 15 ОНМ, J,1/4W	2	
R6041,4 2	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
R6049,5 0	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
R6055	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6056	ERJ6GEYJ104	м 100конм, J, 1/10W	1	
R6057	ERG1FJS470D	M 47 OHM, J, 1W	1	
R6059,6	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R6061	ERJ6ENF1001	M 1KOHM, 1/10W	1	
	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6067	ERG1FJS472D	M 4.7KOHM, J, 1W	1	
R6068	ERG2FJS123D	M 12KOHM, J, 2W	1	
R6069,7	ERJ6ENF2202	M 2.2KOHM, 1/10W	2	
R6073	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6074	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R6076	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6077,7	ERX3FJSR22D	M 2.2 OHM, J, 3W	2	
R6079,8	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6081 R6082,8 3	ERJ6GEYJ222 TAJAAH0101JV	M 2.2KOHM,J,1/10W M 100 OHM,J,1/16W	2	
R6084	ERJ14YJ224	M 220KOHM, J,1/4W	1	
R6085,8	ERJ6GEYJ470	M 47 OHM, J, 1/10W	2	
R6087	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6088	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6089	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6092	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6101	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R6102	EXB38V470J	RESISTOR ARRAY	1	
R6104	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R6105	EXB38V472J	RESISTOR ARRAY	1	
R6107	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R6110	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R6118,1	ERJ6ENF3902	м 39конм, 1/10w	2	
R6120	ERJ6ENF7501	м 7.5конм, 1/10w	1	
R6121	ERJ6GEYJ103	м 10конм, J, 1/10W	1	
R6123	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6124	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6125	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6126	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	1	
R6431	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6433	ERJ6GEY0R00	M 0 OHM, 1/10W	1	-
R6439,4 0	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6450	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R6451	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6452	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R6453 R6454,5	ERJ6GEYJ472 ERJ14YJ103	M 4.7KOHM,J,1/10W M 10KOHM, J,1/4W	2	
5	_			
R6456 R6457,5	ERJ6ENF1183 ERJ6ENF2551	M 118KOHM, 1/10W M2.55KOHM, 1/10W	2	
8				

No.	Part No.	Part Name & Description	Pcs	Remarks
R6459	ERJ14YJ104	M 100KOHM, J,1/4W	1	
R6460	ERJ14YJ203U	M 20KOHM, 1/2W	1	
R6461	ERG1FJS471D	M 470 OHM, J, 1W	1	
R6463	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6464	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6465	ERG3FNJS8R2E	M 8.2 OHM, J, 3W	1	
R6466	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6467	ERJ6GEYJ122	M 1.2KOHM, J,1/10W	1 1	
R6468 R6469	ERJ6GEYJ472 ERJ6ENF1602	M 4.7KOHM,J,1/10W M 16KOHM, 1/10W	1	
R6471	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R6472	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6473	ERJ6GEYJ822	M 8.2KOHM, J, 1/10W	1	
R6474	ERG1FJS121D	M 120 OHM, J, 1W	1	
R6475	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6476	ERJ6ENF2743	M 274KOHM, 1/10W	1	
R6478	ERJ6ENF6981	M6.98KOHM, 1/10W	1	
R6479	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6480	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6481	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R6482	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6483	ERJ14YJ752	м 75конм, J,1/4W	1	
R6484	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6485,8	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
6		M 4 Treems = 1/11	$\vdash$	
R6487	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6488	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6489	ERJ6GEYJ472	M 4.7KOHM, J,1/10W	1 1	
R6491 R6492	ERJ14YJ104 ERJ6ENF2003	M 100KOHM, J,1/4W M 200KOHM, 1/10W	1 1	
R6493	ERJ6ENF2703	M 270KOHM, 1/10W	1	
	ERJ6GEYJ154	M 150KOHM, J, 1/10W	2	
6			-	
R6497	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6498,9	ERG2FNJS8R2E	M 8.2 OHM, J, 2W	2	
9				
R6500	ERJ6GEYJ122	M 1.2KOHM, J, 1/10W	1	
R6501- 09	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	9	
R6510	ERX3FJS2R2D	M 2 2 OUM T 3W	1	
R6511	ERJ6GEYJ100	M 2.2 OHM, J, 3W M 10 OHM,J,1/10W	1	
R6512	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6513	ERX3FJS2R2D	M 2.2 OHM, J, 3W	1	
R6514	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6515	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6516	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6517	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6518	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R6519	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6520	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6521	ERJ6GEYJ104	м 100КОНМ, J, 1/10W	1	
R6521 R6524	ERJ6GEYJ104 ERJ6ENF3001		<del>                                     </del>	
		M 100KOHM,J,1/10W	1	
R6524 R6525	ERJ6ENF3001	M 100КОНМ, J, 1/10W M 3КОНМ, 1/10W	1	
R6524 R6525 R6526	ERJ6ENF3001 ERJ6GEYJ104	M 100KOHM, J, 1/10W M 3KOHM, 1/10W M 100KOHM, J, 1/10W	1 1 1	
R6524 R6525 R6526 R6527 R6528	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102	M 100KOHM, J, 1/10W M 3KOHM, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/4W M 1KOHM, J, 1/10W	1 1 1 1 1	
R6524 R6525 R6526 R6527 R6528 R6529-	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102	M 100KOHM, J, 1/10W M 3KOHM, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/4W	1 1 1 1	
R6524 R6525 R6526 R6527 R6528 R6529- 36	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ470	M 100KOHM, J, 1/10W M 3KOHM, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/4W M 1KOHM, J, 1/10W M 47 OHM, J, 1/10W	1 1 1 1 1 1 8	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ470 ERJ6GEYJ102	M 100KOHM, J, 1/10W M 3KOHM, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/4W M 1KOHM, J, 1/10W M 47 OHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W	1 1 1 1 1 1 8	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538 R6539	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 TAJAAH0101JV	M 100KOHM, J, 1/10W M 3KOHM, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/4W M 1KOHM, J, 1/10W M 47 OHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 100 OHM, J, 1/16W	1 1 1 1 1 1 8	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538 R6539 R6540	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ470 ERJ6GEYJ102 TAJAAH0101JV ERJ6GEYJ104	M 100KOHM, J, 1/10W M 3KOHM, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/4W M 1KOHM, J, 1/10W M 47 OHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 100 OHM, J, 1/16W M 100KOHM, J, 1/10W	1 1 1 1 1 1 8 1 1 1	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538 R6539 R6540 R6541	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ102 TAJAAH0101JV ERJ6GEYJ104 ERJ6GEYJ470	M 100KOHM, J, 1/10W M 3KOHM, J, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 47 OHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 100 OHM, J, 1/16W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W	1 1 1 1 1 1 8	
R6524	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ102 TAJAAH0101JV ERJ6GEYJ104 ERJ6GEYJ100 ERJ6GEYJ100	M 100KOHM, J, 1/10W M 3KOHM, J, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 100 OHM, J, 1/16W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 47 OHM, J, 1/10W M 10 OHM, J, 1/10W	1 1 1 1 1 1 8 8	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538 R6539 R6540 R6541 R6542	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ102 TAJAAH0101JV ERJ6GEYJ104 ERJ6GEYJ470	M 100KOHM, J, 1/10W M 3KOHM, J, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 47 OHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 100 OHM, J, 1/16W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W	1 1 1 1 1 1 8 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538 R6539 R6540 R6541 R6542 R6544-	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ102 TAJAAH0101JV ERJ6GEYJ104 ERJ6GEYJ100 ERJ6GEYJ100	M 100KOHM, J, 1/10W M 3KOHM, J, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 100 OHM, J, 1/16W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 47 OHM, J, 1/10W M 10 OHM, J, 1/10W	1 1 1 1 1 1 8 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538 R6539 R6540 R6541 R6542 R6544-	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ102 TAJAAH0101JV ERJ6GEYJ104 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100	M 100KOHM, J, 1/10W M 3KOHM, J, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 47 OHM, J, 1/10W M 47 OHM, J, 1/10W M 10 OHM, J, 1/10W M 10 OHM, J, 1/10W M 10 OHM, J, 1/10W	1 1 1 1 1 1 1 8 1 1 1 1 1 1 1 1 1 1 1 1	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538 R6539 R6540 R6541 R6542 R6544- 46 R6548 R6550	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ102 TAJAAH0101JV ERJ6GEYJ104 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100	M 100KOHM, J, 1/10W M 3KOHM, J, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/4W M 1KOHM, J, 1/10W M 47 OHM, J, 1/10W M 47 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 10 OHM, J, 1/10W	1 1 1 1 1 1 1 8 8 1 1 1 1 1 1 3	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538 R6539 R6540 R6541 R6542 R6544- 46 R6548 R6550 R6551 R6552,5	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ102 TAJAAH0101JV ERJ6GEYJ104 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100	M 100KOHM, J, 1/10W M 3KOHM, J, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/4W M 1KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 10 OHM, J, 1/10W M 22KOHM, J, 1/10W	1 1 1 1 1 1 1 8 8 1 1 1 1 1 3	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538 R6539 R6540 R6541 R6542 R6544- 46 R6548 R6550 R6551 R6552,5	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ102 TAJAH0101JV ERJ6GEYJ104 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100	M 100KOHM, J, 1/10W M 3KOHM, J, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 10 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W	1 1 1 1 1 1 8 8 1 1 1 1 1 1 3 1 1 1 1 1	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538 R6539 R6540 R6541 R6542 R6544- 46 R6548 R6550 R6551 R6552,5 3 R6554	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ102 TAJAH0101JV ERJ6GEYJ104 ERJ6GEYJ100 ERJ6GEYJ101 ERJ6GEYJ101	M 100KOHM, J, 1/10W M 3KOHM, J, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 47 OHM, J, 1/10W M 47 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 10 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W	1 1 1 1 1 1 1 8 8 1 1 1 1 1 1 3 1 1 1 1	
R6524 R6525 R6526 R6527 R6528 R6529- 36 R6538 R6539 R6540 R6541 R6542 R6544- 46 R6548 R6550 R6551 R6552,5	ERJ6ENF3001 ERJ6GEYJ104 ERJ6GEYJ470 ERJ14YJ102 ERJ6GEYJ102 ERJ6GEYJ102 TAJAH0101JV ERJ6GEYJ104 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100	M 100KOHM, J, 1/10W M 3KOHM, J, 1/10W M 100KOHM, J, 1/10W M 47 OHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 10 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W	1 1 1 1 1 1 8 8 1 1 1 1 1 1 3 1 1 1 1 1	

	1	1		
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R6559	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6560,6	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
1	EROUGETOTIO	H 47 OHH, 8, 17 10W	_	
F		1 1 1 TOWN 7 1 /1 OT	-	
R6562	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6563	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	1	
R6565	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6566	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R6567,6	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
8				
R6570	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6571-	ERJ6GEYJ471	M 470 OHM, J, 1/10W	8	
78				
R6580	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6581	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
	<del> </del>			
R6582,8	ERJ6ENF3902	м 39конм, 1/10w	2	
3				
R6584	ERJ6ENF7501	м 7.5KOHM, 1/10W	1	
R6585	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6586	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
	<b>+</b>			
R6587	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6588,8	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
9				
R6590	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6591	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
	-			
R6592,9	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
3				
R6594	ERJ14YJ104	M 100KOHM, J,1/4W	1	
R6595	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
R6596	ERJ6ENF5231	M5.23KOHM, 1/10W	1	
	<del> </del>	· · · · · · · · · · · · · · · · · · ·		
R6598	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6599,0	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
0				
R6604	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6605-	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
07	EROUGETUZZA	F 220KOIM1,0,1,10W	,	
		4 4 (0	_	
R6608,0	ERJ12YJ1R0	M 1 OHM, J,1/2W	2	
9				
R6610	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6611-	ERJ14YJ150U	M 15 OHM, J,1/4W	4	
14				
R6615	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6616	ERDS1FJ221	C 220 OHM, J,1/2W	1	
R6617,1	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	2	
8				
R6619,2	ERJ14YJ150U	M 15 OHM, J,1/4W	2	
0				
R6621	ERJ6ENF1543	M 154KOHM, 1/10W	1	
R6622,2	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
3				
R6624	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6625	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6626	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6627,2	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
8	11102411010101	11 100 OH1,0,1/10W		
	ED TERMONO	M 0 07000 1/10	4	
R6629	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R6630	ERJ14YJ204	м 200КОНМ, J,1/4W	1	
R6635-	ERJ14YJ150U	M 15 OHM, J,1/4W	4	
38		· ·		
R6641,4	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
2			_	
	ED T1 42 T1 FAT	M 15 OFF 7 1/4	_	
R6643,4	ERJ14YJ150U	M 15 OHM, J,1/4W	2	
4	_			
R6645,4	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
6				
R6647,4	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
8				
R6649	EXB38V680J	RESISTOR ARRAY	1	
R6653	EXB38V680J	RESISTOR ARRAY	1	
R6655	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6656	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6659,6	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
0				
	ERJ6GEYJ151	м 150 ошм т 1/10гг	2	
R6661,6 2	ENGOGETOTOL	M 150 OHM,J,1/10W		
	EVD 20**472 =	DEGLOSCO SECTION	-	
R6663	EXB38V472J	RESISTOR ARRAY	1	
R6664	EXB38V470J	RESISTOR ARRAY	1	

	1	ı		_
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6667,6 8	ERJ6GEYJ151	M 150 OHM, J, 1/10W	2	
R6669	EXB38V472J	RESISTOR ARRAY	1	
R6670	EXB38V470J	RESISTOR ARRAY	1	
R6675	EXB38V472J	RESISTOR ARRAY	1	
R6676	EXB38V470J	RESISTOR ARRAY	1	
R6683	EXB38V470J	RESISTOR ARRAY	1	
R6686	EXB38V472J	RESISTOR ARRAY	1	
R6696	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6699	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6901	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6902-	ERJ6GEYJ221	M 220 OHM, J, 1/10W	3	
04 R6910,1	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
1				
R6912	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6913	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6920-	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
23		N 000mc 115	-	
R6924	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6955	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6956-	ERJ6GEYJ221	M 220 OHM,J,1/10W	3	
58		M 000mc	-	
R6959	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6975- 78	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6979	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R7102,0	ERJ14YJ220	M 22 OHM, J,1/4W	2	
3				
R7104	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R7105	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7106,0 7	ERJ14YJ220	M 22 OHM, J,1/4W	2	
R7110,1 1	ERJ14YJ220	M 22 OHM, J,1/4W	2	
R7117	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7121-	ERJ8GEY0R00	M 0 OHM, 1/8W	3	
23			•	
R7125	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7126-	TAJAAH0470JV	M 47 OHM, J, 1/16W	3	
28		1/1/57	_	
R7130	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7132- 35	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7136- 41	ERJ14YJ220	M 22 OHM, J,1/4W	6	
R7142- 46	EXB38V470J	RESISTOR ARRAY	5	
R7161	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7162,6 3	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7166,6	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7170,7	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7175-	ERJ6GEY0R00	м 0 ОНМ, 1/10W	3	
R7187	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7188	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R7192	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7194	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7196,9	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
7 R7202,0 3	ERJ14YJ220	M 22 OHM, J,1/4W	2	
R7204	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R7206,0	ERJ14YJ220	M 22 OHM, J,1/4W	2	
7 R7210,1	ERJ14YJ220	M 22 OHM, J,1/4W	2	
R7214,1	ERJ14YJ220	M 22 OHM, J,1/4W	2	
5 P7217	ED TECEV TOO 4	м 220копы т 1/10	1	
R7217 R7218-	ERJ6GEYJ224 ERJ8GEY0R00	M 220KOHM, J,1/10W M 0 OHM, 1/8W	4	
21 R7225	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7226-	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
29	INUMATU4/UUV	ra 4 / Onn, U, 1/10W	4	

-				
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7230	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7232	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7233-	ERJ14YJ220	M 22 OHM, J,1/4W	8	
R7241,4	EXB38V470J	RESISTOR ARRAY	2	
R7243- 46	ERJ3GEY0R00	м 0 ОНМ, 1/16W	4	
R7247	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7248	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R7249,5	EXB38V470J	RESISTOR ARRAY	2	
R7251- 53	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
R7254	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7255	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R7257,5	EXB38V470J	RESISTOR ARRAY	2	
R7259- 65	ERJ6GEY0R00	M 0 OHM, 1/10W	7	
R7289,9 0	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7293	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7296,9 7	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7298,9	ERJ3GEY0R00	м 0 ОНМ, 1/16W	2	
R9002	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9004-	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
06 R9007	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9009	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9010	EXB2HV272JV	RESISTOR ARRAY	1	
R9012	EXB2HV272JV	RESISTOR ARRAY	1	
R9013	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9015- 18	ERJ3GEYJ103	м 10конм, J, 1/16W	4	
R9019	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9020,2	ERJ3GEYJ102	м 1конм, ј, 1/16w	2	
R9022	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9023	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R9024	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9026	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9028	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
0	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9031,3	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9033,3	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9035,3	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9039	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9040	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9041	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9042 R9043,4	ERJ3GEYJ102 TAJAAH0101JV	M 1KOHM,J,1/16W M 100 OHM,J,1/16W	2	
4 P0045	ED T3CEVT100	M 1KOUM T 1/10W	1	
R9045 R9046	ERJ3GEYJ102 ERJ3GEYJ123	M 1KOHM,J,1/16W M 12KOHM,J,1/16W	1	
R9047-	TAJAAH0101JV	M 100 OHM,J,1/16W	4	
50 R9052	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9053	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9054,5	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	2	
5 R9056,5	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
7 R9058,5	ERJ3GEYJ562	м 5.6конм, J, 1/16W	2	
9 R9060-	TAJAAH0101JV	M 100 OHM,J,1/16W	8	
67 R9068-	ERJ3GEYJ103	м 10конм, J, 1/16W	5	
72 R9073	EXB2HV470JV	RESISTOR ARRAY	1	
R9074	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9075	EXB2HV470JV	RESISTOR ARRAY	1	

	· - ·	T	- 1	
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9076	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9077- 79	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9080	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9081	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9082- 89	TAJAAH0101JV	M 100 OHM,J,1/16W	8	
R9090	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9091,9	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
2	ED 120EV 1472	M 4770794 T 1/1677		
R9093 R9094	ERJ3GEYJ473 ERJ6GEY0R00	M 47KOHM,J,1/16W M 0 OHM, 1/10W	1 1	
R9095-	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
98				
R9102- 04	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
R9105	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9107- 09	ERJ3GEYJ393	M 39KOHM,J,1/16W	3	
R9110	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9111,1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
2	ED 130EV 1100	M 10FORM T 1/10T		
R9113	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1 2	
R9114- 16	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9117,1 8	EXB38VR000	RESISTOR ARRAY	2	
8 R9119	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9120,2	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
1 P0122-	ED.T3CEV T1 0 2	м 10корм т 1/16ы	-	
R9122- 24	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9125,2	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R9127,2 8	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9130	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9131- 33	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	3	
R9134- 36	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
R9137	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9140-	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
42	TD TO CTU T1 0 0			
R9145- 47	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9160,6 1	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9162,6 3	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9164,6 5	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R9200- 02	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
R9204	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R9205	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9208	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9210	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9300- 04	D1HG33080001	NETWORK RESISTER	5	
R9305	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9306,0 7	D1HG33080001	NETWORK RESISTER	2	
R9308	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9309	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9313- 16	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9318,1	ERJ3GEY0R00	м 0 ОНМ, 1/16W	2	
R9321	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9323	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9324- 28	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9329	ERJ3GEYJ103	м 10КОНМ,J,1/16W	1	
R9330-	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
33	L		ш	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R9335,3 6	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9337	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
R9338	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
R9339- 42	ERJ6ENF1001	M 1KOHM, 1/10W	4	
R9500- 03	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R9505- 10	TAJAAH0101JV	M 100 OHM,J,1/16W	6	
R9511	EXB2HV272JV	RESISTOR ARRAY	1	
R9512	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9513	EXB2HV272JV	RESISTOR ARRAY	1	
R9515	EXB2HV272JV	RESISTOR ARRAY	1	
7	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9518	EXB2HV470JV	RESISTOR ARRAY	1	
R9519- 21	EXB38V470J	RESISTOR ARRAY	3	
R9522,2 3	EXB2HV470JV	RESISTOR ARRAY	2	
R9524- 26	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
	EXB38V470J	RESISTOR ARRAY	1	
R9528,2	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
9				
	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9533,3 4	ERJ3GEYJ103	м 10конм, J, 1/16W	2	
R9536	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R9537,3 8	ERJ3GEYJ103	м 10конм, J, 1/16W	2	
R9540	ERJ3GEYJ304V	M 300KOHM,J,1/16W	1	
R9544	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9547	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9700	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9702- 04	ERJ3GEYJ103	м 10конм, J, 1/16W	3	
R9706,0 7	ERJ6ENF1001	м 1конм, 1/10w	2	
R9708	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9709	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9714	ERJ3GEY0R00 ERJL14KJ33M	M 0 OHM, 1/16W M 33 OHM, J,1/4W	2	
R9716,1	ERODIAROSSM			
	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9716,1 7		M 20KOHM, 1/10W M17.4KOHM, 1/10W	1	
R9716,1 7 R9718	ERJ6ENF2002	M17.4KOHM, 1/10W		
R9716,1 7 R9718 R9719	ERJ6ENF2002 ERJ6ENF1742		1	
R9716,1 7 R9718 R9719 R9720	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342	M17.4KOHM, 1/10W M6.34KOHM, 1/10W	1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W	1 1 1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100 TAJAAH0101JV ERJ3GEYJ104	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W	1 1 2 1 1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100 TAJAAH0101JV ERJ3GEYJ104 ERJ3GEYJ100	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W	1 1 2 1 1 2	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ104 ERJ3GEYJ100 ERJ6ENF2002	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 20KOHM, 1/10W	1 1 2 1 1 2	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ104 ERJ3GEYJ100 ERJ3GEYJ100 ERJ6ENF2002	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 10 OHM,J,1/16W M 10 OHM,J,1/16W	1 1 2 1 1 2 2	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ104 ERJ3GEYJ100 ERJ6ENF2002	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 20KOHM, 1/10W	1 1 2 1 1 2	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9 R9738,3 9 R9740- 42 R9824	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ104 ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEY0R00 ERJ6GEY0R00 ERJ6GEY0R00	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10 OHM, 1/10W M 10KOHM,J,1/16W	1 1 2 1 1 2 2	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9 R9738,3 9 R9740-42 R9824 R9830	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ104 ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEY0R00 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEY0R00	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 10 OHM,J,1/16W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM,J,1/16W M 10KOHM,J,1/16W	1 1 1 2 1 1 1 2 2 2 2 3	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9 R9738,3 9 R9740- 42 R9824 R9830 R9900	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ104 ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEY0R00 ERJ6GEY0R00 ERJ6GEY0R00 ERJ3GEYJ103 EXB2HV470JV ERJ3GEYJ472	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM,J,1/16W M 10KOHM,J,1/16W	1 1 1 2 1 1 2 2 2 2 3 1 1 1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9 R9738,3 9 R9740-42 R9824 R9830 R9900 R9901	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ104 ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEY0R00 ERJ6GEY0R00 ERJ6GEY0R00 ERJ3GEYJ103 EXB2HV470JV ERJ3GEYJ103 EXB2HV470JV ERJ3GEYJ103	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 10 OHM,J,1/16W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W	1 1 1 2 1 1 2 2 2 2 3 1 1 1 1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9 R9738,3 9 R9740- 42 R9824 R9830 R9900 R9901 R9902	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ104 ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEY0R00 ERJ6GEY0R00 ERJ6GEY0R00 ERJ3GEYJ103 EXB2HV470JV ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 10 OHM,J,1/16W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM,J,1/16W	1 1 1 2 1 1 2 2 2 2 3 1 1 1 1 1 1 1 1 1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9738,3 9 R9740-42 R9824 R9830 R9900 R9901 R9902 R9903	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEYJ100 ERJ6GEY0R00 ERJ6GEY0R00 ERJ3GEYJ103 EXB2HV470JV ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ104 ERJ3GEYJ104	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 10 OHM,J,1/16W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM,J,1/16W M 4.7KOHM,J,1/16W	1 1 1 2 2 2 2 2 3 1 1 1 1 1 1 1 1 1 1 1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9 R9738,3 9 R9740-42 R9824 R9830 R9900 R9901 R9902 R9903 R9904	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEY0R00 ERJ6GEY0R00 ERJ3GEYJ103 EXB2HV470JV ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ104 ERJ3GEYJ104 ERJ3GEYJ103	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 10 OHM,J,1/16W M 0 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM,J,1/16W	1 1 1 2 1 1 2 2 2 2 3 1 1 1 1 1 1 1 1 1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9738,3 9 R9740-42 R9824 R9830 R9900 R9901 R9902 R9903	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEYJ100 ERJ6GEY0R00 ERJ6GEY0R00 ERJ3GEYJ103 EXB2HV470JV ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ104 ERJ3GEYJ104	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 10 OHM,J,1/16W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM,J,1/16W M 4.7KOHM,J,1/16W	1 1 1 2 2 2 2 2 3 1 1 1 1 1 1 1 1 1 1 1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9 R9738,3 9 R9740-42 R9824 R9830 R9900 R9901 R9902 R9901 R9902 R9903 R9904 R9905 R9906	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ104 ERJ3GEYJ104 ERJ3GEYJ104 ERJ3GEYJ103 ERJ3GEYJ104	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 10 OHM,J,1/16W M 100KOHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 20KOHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/16W M 10KOHM,J,1/16W	1 1 1 2 2 2 2 2 3 1 1 1 1 1 1 1 1 1 1 1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9 R9738,3 9 R9740- 42 R9824 R9824 R9930 R9901 R9902 R9903 R9904 R9905 R9904 R9905 R9906 R9907 R9908,0	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEY0R00 ERJ6GEY0R00 ERJ3GEYJ103 EXB2HV470JV ERJ3GEYJ103 ERJ3GEYJ104 ERJ3GEYJ104 ERJ3GEYJ103 ERJ3GEYJ104 ERJ3GEYJ104 ERJ3GEYJ104 ERJ3GEYJ104	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 10 OHM,J,1/16W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM,J,1/16W	1 1 1 2 2 2 2 2 3 1 1 1 1 1 1 1 1 1 1 1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9 R9738,3 9 R9740- 42 R9824 R9824 R9930 R9901 R9902 R9903 R9904 R9905 R9906 R9907 R9908,0	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEYJ100 ERJ6ENF2002 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ104	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 10 OHM,J,1/16W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM,J,1/16W	1 1 1 2 2 2 2 2 3 1 1 1 1 1 1 1 1 1 1 1	
R9716,1 7 R9718 R9719 R9720 R9721 R9722,2 3 R9724 R9725 R9726,2 7 R9728,2 9 R9738,3 9 R9740-42 R9824 R9830 R9900 R9901 R9902 R9903 R9904 R9905 R9906 R9907 R9908,0 9 R9901,1	ERJ6ENF2002 ERJ6ENF1742 ERJ6ENF6342 ERJ6ENF6342 ERJ6ENF2002 ERJ3GEYJ100  TAJAAH0101JV ERJ3GEYJ104 ERJ3GEYJ100  ERJ6ENF2002 ERJ6ENF2002  ERJ6EYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ104 ERJ3GEYJ103 ERJ3GEYJ104	M17.4KOHM, 1/10W M6.34KOHM, 1/10W M 20KOHM, 1/10W M 10 OHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 100KOHM,J,1/16W M 10 OHM,J,1/16W M 0 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM,J,1/16W M 20KOHM,J,1/16W M 10KOHM,J,1/16W	1 1 1 2 2 2 2 2 3 1 1 1 1 1 1 1 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R9914	EXB38V470J	RESISTOR ARRAY	1	
R9915,1	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9917-	EXB2HV470JV	RESISTOR ARRAY	3	
19				
R9922	EXB2HV470JV	RESISTOR ARRAY	1	
R9923	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
D10510	DV2 4 CO1140 F TTV	DELLOGO DEGETTED	-	
RM2510	PNA4601M05TV	REMOCO RECEIVER	1	
RTL	TNPA3523AE	CIRCUIT BOARD H	1	Δ
RTL	TNPA3620AB	CIRCUIT BOARD PA	1	Δ
RTL	TNPA3621AE	CIRCUIT BOARD Z	1	Δ
RTL	TNPA3519AK	CIRCUIT BOARD DG	1	тн-37ра50н 🛆
RTL	TZTNP01YFSM	CIRCUIT BOARD DG	1	TH-37PA50M ⚠
RTL	TNPA3524	CIRCUIT BOARD TB	1	Δ
RTL	TNPA3541	CIRCUIT BOARD C1	1	<u> </u>
RTL RTL	TNPA3542 TZTNP010YFS	CIRCUIT BOARD C2	1	<u> </u>
RTL	TNPA3570	CIRCUIT BOARD D	1	<u>△</u>
RTL	TNPA3643AB	CIRCUIT BOARD PB	1	$\triangle$
RTL	TNPA3543AB	CIRCUIT BOARD SC	1	Δ
RTL	TNPA3233	CIRCUIT BOARD SD	1	Δ
RTL	TNPA3544AB	CIRCUIT BOARD SS	1	Δ
RTL	TNPA3232	CIRCUIT BOARD SU	1	Δ
RTL	TXN/K1YFSA	CIRCUIT BOARD K	1	$\triangle$
RTL	TNPA3604AB	CIRCUIT BOARD S	1	Δ
21	**1 *** 0 0 2 2 0 1 0 0	an governmen	-	
S1	K1KA03AA0193	3P CONNECTOR	1	
SC2	K1KA06AA0192	6P CONNECTOR	1	
SC20	K1KA20AA0008	20P CONNECTOR	1	
SC23	K1KA03AA0193	3P CONNECTOR	1	
sc30	K1KA03AA0193	3P CONNECTOR	1	
SC41,42	K1ML80BA0001	80P CONNECTOR	2	
SC45,46	K1KA10A00431	10P CONNECTOR	2	
SD1-D3	K1MN80B00004	80P CONNECTOR	3	
SD1-D3	K1KA10B00209	10P CONNECTOR	1	
SS11	K1KA07AA0192	7P CONNECTOR	1	
SS12	K1KA05AA0192	5P CONNECTOR	1	
SS23	K1KA12AA0194	12P CONNECTOR	1	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS41A- 4A	K1MN13B00020	13P CONNECTOR	4	
SU1-U3	K1MN80B00004	80P CONNECTOR	3	
SU45	K1KA10B00209	10P CONNECTOR	1	
SW2500 SW3751-	K0F162B00002 EVQ11G05R	SWITCH SWITCH	5	
55	LVQIIOUSK	J. T. C.		
T6461	ETS13TB139AP	SWITCHING TRANS	1	
T6471	ETS19AA259AC	SWITCHING TRANS	1	
TB5,B6	K1KB15B00013	15P CONNECTOR	2	
200,00	X1XD13B00013	TOP CONNECTOR	<del></del>	
TU001	ENGF9301GF	TUNER	1	Δ
TU002	ENG39A01GF	TUNER	1	Δ
			<u> </u>	
VR6074	EVMEASA00B14	CONTROL 10KOHMB	1	
VR6477	EVMEASA00B23	CONTROL 2KOHMB	1	
VR6557	EVMEASA00B14	CONTROL 10KOHMB	1	
		v.Jn		
X1101	ној600400006	CRYSTAL	1	
X2101	TSSA128	CRYSTAL	1	
X4001	ној202500016	CRYSTAL	1	
X4002	H0J270500087	CRYSTAL	1	
X9000	H2D2705A0004	CRYSTAL	1	

			-	
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
X9200	ној200500038	_	1	
Z2	K1KA05AA0192	5P CONNECTOR	1	
<b>z</b> 50	K1MN35A00013	35P CONNECTOR	1	
ZA5601-	K9ZZ00000424	CONNECTOR	4	
04				
ZA5801- 04	K9ZZ00000424	CONNECTOR	4	
	K4CD01000013	TERMINAL	1	
ZA6004	K4CD01000013	TERMINAL	1	
	K4CD01000013	TERMINAL	3	
03				
ZA7101	K4CD01000013	TERMINAL	1	
ZA7103	K4CD01000013	TERMINAL	1	
ZA7201	K4CD01000013	TERMINAL	1	
ZA7203	K4CD01000013	TERMINAL	1	
ZA9001	K4CD01000013	TERMINAL	1	
ZMM1	TMM25401	CLAMPER	1	
C400	EC TOYO1 "1 01 -	C 100DE T 50T	-	
C402		C 100PF, J, 50V	1	A
C403	ECKCNA222MEB	·	1	<u> </u>
C404 C405	F0CAF105A021 ECJ2XB1H103K	C 1UF, 250V C 0.01UF, K, 50V	1	\
C405	ECA2WHG220	E 22UF, 450V	1	
C409	F0CAF105A021	C 1UF, 250V	1	Δ
C410	ECJ3YB1E105K	C 1UF, K, 25V	1	
	ECJ2XB1H103K		4	
	F1A3A102A040	C 1000PF, J, 1KV	2	
C417	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C418	F1J1C1050011	C 1UF, Z, 50V	1	
C419	F1A3A102A040	C 1000PF, J, 1KV	1	
C421,22	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C423	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C424	F1A3A102A040	C 1000PF, J, 1KV	1	
C425	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C426	ECJ2XC1H471J	C 470PF, J, 50V	1	
C427	F1J1C1050011	C 1UF, Z, 50V	1	
		C 220PF, J, 50V	1	
	F1K2J1530002		2	
C431	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C432-34 C436	F1J1C1050011 F1J1C1050011	C 1UF, Z, 50V	3 1	
C440	ECA1HM100	C 1UF, Z, 50V E 10UF, 50V	1	
C443,44	F1A3A102A040	C 1000F, J, 1KV	2	
C445	F1J1C1050011	C 1UF, Z, 50V	1	
C446	F2B2W3910005	C 390UF, 450V	1	
C451	F1A3A101A040	C 100PF, J, 1KV	1	
C457	ECWH12333RHV	P 0.013UF,J,1.2KV	1	
C459	F1K2J1530002	C 0.15PF, J,630V	1	
C460,61	F1A3A331A039	E 330UF, 1KV	2	
C462	ECJ3YB1E105K	C 1UF, K, 25V	1	
C463	ECJ2XC1H220J	C 22UF, J, 50V	1	
C465	ECKCNA221KB7	C 220PF, M,	1	Δ
C467	ECKCNA221KB7	C 220PF, M,	1	Δ
C468	ECJ2XB1H103K	C 0.01UF, K, 50V	1	_
C470	F0CAF105A021	C 1UF, 250V	1	Δ
C471	F1J1C1050011	C 1UF, Z, 50V	1	
C473	ECKCNA221KB7	C 220PF, M,	1	<u> </u>
C476	ECKCNA221KB7	C 220PF, M,	1	Δ
C482 C490	ECJ2XB1H104K ECJ2XC1H331J	C 0.1UF, K, 50V	1	
C490	ECJ2XCIH33IJ ECJ2XB1E104K	C 330PF, J, 50V C 0.1UF, K, 25V	1	
C491	ECJ2XC1H271J	C 270PF, J, 50V	1	
C493	ECA1EM101	E 100UF, 25V	1	
C494,95	ECJ2XC1H101J	C 100PF, J, 50V	2	
C496	F1J1C1050011	C 1UF, Z, 50V	1	
C497	ECA1EM221	E 220UF, 25V	1	
C498	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C501-03	ECJ2XB1H103K	C 0.01UF, K, 50V	3	
C504	F1J1C1050011	C 1UF, Z, 50V	1	
C505	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C506-08	ECJ2XB1H103K	C 0.01UF, K, 50V	3	

D- f	Don't No	Dank Name C	D	Dama ala
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C509	ECA1EM101	E 100UF, 25V	1	
C510	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C511	ECA1EM331	E 330UF, 25V	1	
C512-14	ECJ2XC1H471J	C 470PF, J, 50V	3	
C515	ECA1CM222	E 2200UF, 16V	1	
C516	ECJ2XB1C474K	C 0.47UF, K, 16V	1	
C517	F2D1E1010001	E 10UF, 25V	1	
C518,19	F1J1C1050011	C 1UF, Z, 50V	2	
C523	ECJ3YB1E105K	C 1UF, K, 25V	1	
C525	F2A1E8210012	E 820UF, 25V	1	
C526	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C527	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C528,29	F1J1C1050011	C 1UF, Z, 50V	2	
C530		C 0.033UF, K, 50V	1	
C533		C 0.01UF, K, 50V	1	
C534	ECJ2XC1H471J	C 470PF, J, 50V	1	
C546,47	ECJ2VB1H333K	C 0.033UF, K, 50V	2	
C548	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
	ECJ2XB1H104K	C 0.1UF, K, 50V	3	
C554	F1J1C1050011	C 1UF, Z, 50V	1	
C555		E 100UF, 100V	1	
C556		E 1500UF, 16V	1	
C557		E 1500UF, 25V	1	
C562		C 0.1UF, K, 50V	1	
C572		C 0.1UF, K, 50V	1	
C574 C577		C 0.1UF, K, 50V	1	
	ECA2AM330	E 33UF, 100V		
C581 C583	ECJ2XB1H223K ECJ2XB1H102K	C 1000PE K 50V	1	
	ECJ2XB1H102K ECJ2XB1H223K	C 1000PF, K, 50V	1	
C584 C587	ECJ2XB1H223K ECJ2XB1H103K	C 0.022UF, K, 50V C 0.01UF, K, 50V	1	
	F1K2J1530002		2	
C601	ECJ2XB1H103K	C 0.15PF, J,630V C 0.01UF, K, 50V	1	
C603	ECA1HM470	E 47UF, 50V	1	
	<del> </del>	E 150UF, 160V	2	
		C 1UF, Z, 50V	2	
C608,09	1	C 0.01UF, K, 50V	2	
C610	F1J1C1050011	C 1UF, Z, 50V	1	
C611	F2B2D1720001	E 1700UF,@ 200V	1	
C612	<del>†</del>	C 0.01UF, K, 50V	1	
C615	-	E 1700UF,@ 200V	1	
C616	F1A3A102A040	C 1000PF, J, 1KV	1	
C619		C 0.1UF, K, 50V	1	
C620	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C623	ECA1HM100	E 10UF, 50V	1	
C624	ECJ3YB1E105K	C 1UF, K, 25V	1	
C626	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C629		C 0.01UF, K, 50V	1	
C631	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C633	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C634	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C635	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C636	F1J1C1050011	C 1UF, Z, 50V	1	
C637	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C638,39	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C640		C 0.1UF, K, 50V	1	
C641	ECJ2XB1H102K	C 1000PF, K, 50V	1	
	ECA1HM470	E 47UF, 50V	1	
C646,47	ECJ2XC1H331J	C 330PF, J, 50V	2	
D401	B0FBAT000006	DIODE	1	
D402	MA4240MTA	ZENER DIODE	1	
D403	MA4051NM	ZENER DIODE	1	
D404	B0EBKT000007	DIODE	1	
	MA4200M	ZENER DIODE	1	
D406	MA188	DIODE	1	
D406 D407	121200		1	
	MA111	DIODE		
D407		DIODE	1	
D407 D410 D411	MA111 B0BB17000010			
D407 D410	MA111 B0BB17000010	DIODE	1	
D407 D410 D411 D412-14	MA111 B0BB17000010 MA111	DIODE DIODE	1	
D407 D410 D411 D412-14 D415	MA111 B0BB17000010 MA111 B0JAME000081 RU30A MA4082M	DIODE DIODE	1 3 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
	MA188	DIODE	1	
D425	MA188	DIODE	1	
	ERA15-10	DIODE	3	
	B0JCDD000002	DIODE	1	
D433	MA4150M	ZENER DIODE	1	
D434	MA4082M	ZENER DIODE	1	
D435 D436	ERA15-10 MA188	DIODE	1	
D436	MA4082M	DIODE ZENER DIODE	1	
D437	MA4150M	ZENER DIODE	1	
D439	MA4130HTA	ZENER DIODE	1	
D440	MA4300M	ZENER DIODE	1	
D441	B0HAMM000122		1	
D442	MA4075M	ZENER DIODE	1	
D443	MA4240MTA	ZENER DIODE	1	
D444	B0HAMM000122	DIODE	1	
D445	MA165	DIODE	1	
D459	MA188	DIODE	1	
D461	MA4082M	ZENER DIODE	1	
D462	MA142WKTX	ZENER DIODE	1	
D463-67	ERA15-10	DIODE	5	
D501	B0HANR000016	DIODE	1	
D503,04	MA165	DIODE	2	
D505	B0JAME000081	DIODE	1	
D506	MA4051NM	ZENER DIODE	1	
	MA4150M	ZENER DIODE	2	
	B0HANM000028		2	
D511	B0HBSM000043	DIODE	1	
D514	MA4062M	ZENER DIODE	1	
	B0HAMP000067	DIODE	1	
D528,29		DIODE	2	
D530	MA4100M	ZENER DIODE	2	
D531,32	B0HAPR000012 B0JBSG000026	DIODE	1	
D534 D535	MA188	DIODE	1	
D536	B0JBSL000013	DIODE	1	
D538	MA3051M	ZENER DIODE	1	
D539	B0HBRP000007		1	
D542	MA4180HTA	ZENER DIODE	1	
D543	MA4150M	ZENER DIODE	1	
	MA4180HTA	ZENER DIODE	2	
D549	MA4075M	ZENER DIODE	1	
D551	MA4130M	ZENER DIODE	1	
D552	MA4082M	ZENER DIODE	1	
D555	MA4075M	ZENER DIODE	1	
D559	MA4075M	ZENER DIODE	1	
D563	MA4062M	ZENER DIODE	1	
D564	MAZ72000AF	ZENER DIODE	1	
D565	MA4160M	ZENER DIODE	1	
D566	B0HAMM000122	DIODE	1	
D568	MA3J142D0L	DIODE	1	
D569-71	MA4300M	ZENER DIODE	3	
D572	MA188	DIODE	1	
D574	MA111	DIODE	1	
D575	MA188	DIODE	1	
D579	MA111	DIODE	1	
D582	MAZ705600F	ZENER DIODE	1	
D584	MA4075M	ZENER DIODE	1	
D586	B0HAMP000067	DIODE	1	
D587	MA188	DIODE	1	
IC401	CNC19171P	TC	1	Δ
IC401 IC402	CNC1S171R COBBAA000038	IC	1	د ا
IC402	CNC1S171R	IC	2	Δ
4	CHOISI / IR			شن
IC406	CODAZZZ00021	IC	1	
IC407	CODBAZZO0111	IC	1	
IC408,0	CNC1S171R	IC	2	Δ
1.4	CNCISITIE			1
9	CNC13171K			
IC411	C0BBAA000038	IC	1	
IC411 IC412	C0BBAA000038 CNC1S171R	IC	1	Δ
IC411	C0BBAA000038		+-	Δ

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC503,0 4	CODAEMB00004	IC	2	
IC505	CNC1S171R	IC	1	
IC506	C0ZBZ0000878	IC	1	
IC507	C0CBABE00023	IC	1	
IC509	C0DABZZ00010	IC	1	
IC512	CODAEMB00004	ıc	1	
IC520	C9ZB00000496	IC	1	
L402	EXCELSA24	BEAD CHOKE	1	
L403	EXCELSA24	BEAD CHOKE	1	
	G0B123K00003	INDUCTION COIL	2	Δ
L501	EXCELSA35	BEAD CHOKE	1	
L502	TALLO8N102JA	INDUCTION COIL	1	
L506	EXCELDR25C	BEAD CHOKE	1	
L509	J0JBC0000032	CHIP INDUCTOR	1	
L510	EXCELDR25C	BEAD CHOKE	1	
1310	EXCEEDINGS	BEAD CHOKE	+-	
P2	K1KA06AA0479	6D CONNECTION	1	
		6P CONNECTOR	_	
P5	K1KA11AA0183	11P CONNECTOR	1 1	
P9	K1KA03A00537	3P CONNECTOR	+-	
P10	K1KA06AA0182	6P CONNECTOR	1	
P11	K1KA07AA0192	7P CONNECTOR	1	
P12	K1KA05AA0192	5P CONNECTOR	1	
P23	K1KA03AA0182	3P CONNECTOR	1	
P25	K1KA20AA0178	20P CONNECTOR	1	
P30	K1KA05AA0182	5P CONNECTOR	1	
PR401	K5Y502BA0001	FUSE	1	
PR402	K5G202B00015	FUSE	1	
PR501	K5H502Z00003	FUSE	1	
PR503	K5H502Z00003	FUSE	1	
PR509	K5H501Z00005	FUSE	1	
PR601	K5G312B00012	FUSE	1	
Q401	B1CHND000004	TRANSISTOR	1	
Q403	B1CBGD000001	TRANSISTOR	1	
Q404	B1BCCF000022	TRANSISTOR	1	
Q406	B1DEHQ000007	TRANSISTOR	1	
Q407	XN4601	TRANSISTOR	1	
Q408,09	B1CHND000004	TRANSISTOR	2	
Q412,13	B1DAGQ000013	TRANSISTOR	2	
Q414	B1ABCF000134	TRANSISTOR	1	
Q415		MD 3 32G T G M G D		
0417	2SB1218ARL	TRANSISTOR	1	
Q417	2SB1218ARL B1CHND000004	TRANSISTOR	1	
Q417 Q418	+	+		
	B1CHND000004	TRANSISTOR	1	
Q418 Q420-22	B1CHND000004 2SD1819A 2SD1819A	TRANSISTOR TRANSISTOR TRANSISTOR	1	
Q418	B1CHND000004 2SD1819A	TRANSISTOR TRANSISTOR	1 1 3	
Q418 Q420-22 Q423,24	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	1 1 3 2	
Q418 Q420-22 Q423,24 Q430 Q431	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	1 1 3 2 1	
Q418 Q420-22 Q423,24 Q430	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	1 1 3 2 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	1 1 3 2 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q433	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002	TRANSISTOR	1 1 3 2 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001	TRANSISTOR	1 1 3 2 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002	TRANSISTOR	1 1 3 2 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438	B1CHND000004  2SD1819A  2SD1819A  B1CBGD000001  B1CEJQ000002  B1DEGS000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CHQ0000001 B1CHQ0000001	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CHND000004 2SD1819A 2SD1820A	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 1 2 2 2	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CHND000004 2SD1819A 2SD1820A KN0440100L	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 1 2 2 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CHND000004 2SD1819A 2SD1820A XN0440100L B1CEJQ000002	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 1 2 2 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505 Q506	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CHND000004 2SD1819A 2SD1820A XN0440100L B1CEJQ000002 B1CHND000004	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 1 2 2 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505 Q506 Q507	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CHND000004 2SD1819A 2SD1820A XN0440100L B1CEJQ000002 B1CHND000004 B1CHND000004 B1DAGQ000013	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505 Q506 Q507 Q508	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CHND000004 2SD1819A 2SD1820A XN0440100L B1CEJQ000002 B1CHND000004 B1DAGQ000013 XN0450100L	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505 Q506 Q507 Q508 Q509	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CHND000004 2SD1819A 2SD1820A XN0440100L B1CEJQ000002 B1CHND000004 B1DAGQ000013 XN0450100L XN0440100L	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505 Q506 Q507 Q508 Q509 Q510	B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CHND000004 2SD1819A 2SD1820A XN0440100L B1CEJQ000002 B1CHND000004 B1DAGQ000013 XN0450100L B1DHBD000004	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505 Q506 Q507 Q508 Q509 Q510 Q511	B1CHND000004  2SD1819A  2SD1819A  B1CBGD000001  B1CEJQ000002  B1DEGS000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CHND000004  B1CBJQ000002  B1CHND000004  B1CHND000004  B1CHND000004  B1DAGQ000013  XN04501001  XN04401001  B1DHBD000004  B1DHBD000004  B1CFND000005	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505 Q506 Q507 Q508 Q509 Q510 Q511 Q512	B1CHND000004  2SD1819A  2SD1819A  B1CBGD000001  B1CEJQ000002  B1DEGS000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CHND000004  2SD1819A  2SD1819A  2SD1820A  XN0440100L  B1CEJQ000002  B1CHND000004  B1DAGQ000013  XN0450100L  XN0440100L  B1DHBD000004  B1CFND000005  B1CFND000005  B1CBGD000001	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505 Q506 Q507 Q508 Q509 Q510 Q511 Q512 Q516	B1CHND000004  2SD1819A  2SD1819A  B1CBGD000001  B1CEJQ000002  B1DEGS000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CHND000004  2SD1819A  2SD1819A  2SD1820A  XN0440100L  B1CEJQ000002  B1CHND000004  B1DAGQ000013  XN0450100L  XN0440100L  B1DHBD000004  B1CFND000005  B1CBGD000001  B1DHBD000004	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505 Q506 Q507 Q508 Q509 Q510 Q511 Q512 Q516 Q517	B1CHND000004  2SD1819A  2SD1819A  B1CBGD000001  B1CEJQ000002  B1DEGS000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CHND000004  2SD1819A  2SD1820A  XN0440100L  B1CEJQ000002  B1CHND000004  B1DAGQ000013  XN0450100L  XN0440100L  B1DHBD000004  B1CFND000005  B1CBGD000001  B1DHBD000004  B1CFND000005  B1CBGD000001	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505 Q506 Q507 Q508 Q509 Q510 Q511 Q512 Q516 Q517 Q518	B1CHND000004  2SD1819A  2SD1819A  B1CBGD000001  B1CEJQ000002  B1DEGS000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CHND000004  2SD1819A  2SD1820A  XN0440100L  B1CEJQ000002  B1CHD000004  B1DAGQ000013  XN0450100L  XN0440100L  B1DHBD000004  B1CFND000005  B1CBGD000001  B1DHBD000004  B1CFND000005  B1CBGD000001  B1DHBD000004  B1DHBD000004  B1DHBD000004	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1	
Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436 Q438 Q439 Q440,41 Q501,02 Q503 Q505 Q506 Q507 Q508 Q509 Q510 Q511 Q512 Q516 Q517	B1CHND000004  2SD1819A  2SD1819A  B1CBGD000001  B1CEJQ000002  B1DEGS000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CEJQ000002  B1CBGD000001  B1CHND000004  2SD1819A  2SD1820A  XN0440100L  B1CEJQ000002  B1CHND000004  B1DAGQ000013  XN0450100L  XN0440100L  B1DHBD000004  B1CFND000005  B1CBGD000001  B1DHBD000004  B1CFND000005  B1CBGD000001	TRANSISTOR	1 1 3 2 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1	

	1	1		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q525	B1CBGD000001	TRANSISTOR	1	
Q527	B1DEHL000018	TRANSISTOR	1	
Q530	B1CBGD000001	TRANSISTOR	1	
Q535	2SD1819A	TRANSISTOR	1	
Q536-38	B1CFQD000001	TRANSISTOR	3	
Q541	B1CBGD00001	TRANSISTOR	1	
Q544	XN0440100L	TRANSISTOR	1	
Q550	B1CHGD000006	TRANSISTOR	1	
Q551,52	B1CBGD000001	TRANSISTOR	2	
Q553	2SD1819A	TRANSISTOR	1	
Q554	B1DHBD000004	TRANSISTOR	1	
Q557	2SD1819A	TRANSISTOR	1	
Q558	B1CHHG000002	TRANSISTOR	1	
Q559	2SD1819A	TRANSISTOR	1	
Q560	B1CHHG000002	TRANSISTOR	1	
Q561,62	2SD1819A	TRANSISTOR	2	
Q564,65	2SD1819A	TRANSISTOR	2	
Q567	B1CBGD000001	TRANSISTOR	1	
R401	ERJ6GEYJ472	M 4 7KOHM T 1/10W	1	
R401	ERJ6EKF6803	M 4.7KOHM, J, 1/10W M 680KOHM, 1/10W	1	
R402	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R404	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R405	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R407	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R408	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R410,11	D1F5100E0002	F 3.3 OHM, 5W	2	Δ
R412	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R413	D1F5100E0002	F 3.3 OHM, 5W	1	Δ
R414	ERJ8GEYJ153	M 15KOHM, J,1/8W	1	
R415	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R416	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R417	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R418	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R419	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R420	ERJ6GEYJ474	M 470KOHM, J, 1/10W	1	
R421	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R422	ERJ8GEYJ181	M 180 OHM, J,1/8W	1	
R423	ERJ6GEYJ154	M 150KOHM, J, 1/10W	1	
R424 R425	ERJ6GEYJ223	M 22KOHM,J,1/10W M 3.3KOHM,J,1/10W	1	
R425	ERJ6GEYJ332 ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R427	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R428	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R429	ERJ8GEYJ103	M 10KOHM, J,1/8W	1	
R430	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R431	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R432	ERJ8GEYJ103	M 10KOHM, J,1/8W	1	
R433	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R435	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R436	ERJ8GEYJ153	м 15конм, J,1/8W	1	
R437	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R438	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R439	ERG12SJ120	M 12 OHM, J,1/2W	1	
R440	ERJ8GEYJ474	M 470KOHM, J,1/8W	1	
R441,42	ERJ6EKF6803	M 680KOHM, 1/10W	2	
R443	EVMAASA00B23	CONTROL 2KOHMB	1	
R444	ERJ6GEYJ123	M 12KOHM, J, 1/10W	1	
R445	ERJ6ENF1003	M 100KOHM, 1/10W	1	
R446	ERX2SJR39H	M0.39 OHM, J, 2W	1	
R447	ERJ6ENF3302 D0XGR10JA007	M 33KOHM, 1/10W	2	
R448,49 R450	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R450	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R451	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R452	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R454	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R455	ERJ6GEYJ106	M 10MOHM, J, 1/10W	1	
R456,57	ERJ6GEYJ333	M 33KOHM,J,1/10W	2	
R458	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R461	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R462	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R463	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	

Ref.	Part No.	Part Name & Description	Pcs	Remarks
R464	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R465	ERJ6ENF5603	M 560KOHM, 1/10W	1	
R466,67	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R468	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R469	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R470	ERX2SJR39H	M0.39 OHM, J, 2W	1	
R471	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R472,73	ERJ6ENF5603	M 560KOHM, 1/10W	2	
R474	ERG1SJ104P	M 100KOHM, J, 1W	1	
R475	ERJ6EKF6803	M 680KOHM, 1/10W	2	
R476,77 R478	ERJ14YJ181U ERJ8GEYJ220	M 181 OHM, J,1/4W M 22 OHM, J,1/8W	1	
R479	ERG1SJ104P	M 100KOHM, J, 1W	1	
R480	ERJ6ENF9102	M91.0KOHM, 1/10W	1	
R481	ERJ6GEYJ106	M 10MOHM,J,1/10W	1	
R482	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R483	ERJ6GEYJ106	M 10MOHM,J,1/10W	1	
R485	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R486,87	ERJ6GEYJ682	M 6.8KOHM, J, 1/10W	2	
R488	ERJ6GEYJ106	M 10MOHM,J,1/10W	1	
R489	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R490,91	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R492	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
R493	ERG12SJ120	M 12 OHM, J,1/2W	1	
R494-96	ERJ6ENF5603	M 560KOHM, 1/10W	3	
R497	ERJ6ENF2402	M 24KOHM, 1/10W	1	
R501	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R502,03	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R504	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R505 R506	ERJ8GEYJ330 ERJ6GEYJ102	M 33 OHM, J,1/8W M 1KOHM,J,1/10W	1	
R500	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R508	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R509-11	ERJ6GEYJ104	M 100KOHM, J, 1/10W	3	
R512	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R513,14	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R515,16	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R517	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R518	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R519,20	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R521,22	ERJ8GEYJ100	M 10 OHM, J,1/8W	2	
R523	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R524	ERJ6GEYJ182	M 1.8KOHM, J, 1/10W	1	
R525	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R526,27 R528	ERJ8GEYJ224 ERJ6GEYJ4R7	M 220KOHM, J,1/8W M 4.7 OHM,J,1/10W	1	
R520	ERJ6RBD3302	M 3.3KOHM,F,1/10W	1	
R531	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R532	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R533	ERJ8GEYJ223	M 22KOHM, J,1/8W	_	
			1	
R534	ERJ8GEYJ224	M 220KOHM, J,1/8W	1	
R534 R535,36				
	ERJ8GEYJ224	M 220KOHM, J,1/8W	1	
R535,36	ERJ8GEYJ224 ERJ6GEYJ102	M 220KOHM, J,1/8W M 1KOHM,J,1/10W	1 2	
R535,36 R537 R538 R539	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, 1/10W M 100KOHM,J,1/10W M 1.0KOHM, 1/10W	1 2 1 1	
R535,36 R537 R538 R539 R540	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6RBD1002 ERJ6GEYJ103	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, 1/10W M 100KOHM,J,1/10W M 1.0KOHM, 1/10W M 10KOHM,J,1/10W	1 2 1 1 1	
R535,36 R537 R538 R539 R540	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6RBD1002 ERJ6GEYJ103 ERJ6GEYJ104	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, 1/10W M 100KOHM,J,1/10W M 1.0KOHM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W	1 2 1 1 1 1	
R535,36 R537 R538 R539 R540 R541 R542	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6RBD1002 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ104	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, 1/10W M 100KOHM,J,1/10W M 1.0KOHM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W	1 2 1 1 1 1 1	
R535,36 R537 R538 R539 R540 R541 R542 R543	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6RBD1002 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, 1/10W M 100KOHM,J,1/10W M 1.0KOHM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10XOHM,J,1/10W M 12.2KOHM,J,1/10W	1 2 1 1 1 1 1 1	
R535,36 R537 R538 R539 R540 R541 R542 R543	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ222 ERJ6GEYJ331	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, 1/10W M 100KOHM,J,1/10W M 1.0KOHM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 2.2KOHM,J,1/10W M 330 OHM,J,1/10W	1 2 1 1 1 1 1 1 1	
R535,36 R537 R538 R539 R540 R541 R542 R543 R544 R545	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ222 ERJ6GEYJ331 ERJ6GEYJ103	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, 1/10W M 100KOHM,J,1/10W M 1.0KOHM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 100KOHM,J,1/10W M 100KOHM,J,1/10W M 1XOHM,J,1/10W M 2.2KOHM,J,1/10W M 330 OHM,J,1/10W	1 2 1 1 1 1 1 1 1 1	
R535,36 R537 R538 R539 R540 R541 R542 R543 R544 R545 R544 R545	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, 1/10W M 100KOHM,J,1/10W M 1.0KOHM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 1KOHM,J,1/10W M 2.2KOHM,J,1/10W M 330 OHM,J,1/10W M 10KOHM,J,1/10W	1 2 1 1 1 1 1 1 1 1 1 2	
R535,36 R537 R538 R539 R540 R541 R542 R543 R544 R545 R544 R545 R546,47	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, 1/10W M 100KOHM,J,1/10W M 1.0KOHM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 2.2KOHM,J,1/10W M 330 OHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 1KOHM,J,1/10W	1 2 1 1 1 1 1 1 1 1 1 2	
R535,36 R537 R538 R539 R540 R541 R542 R543 R544 R544 R545 R546,47 R548 R549	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, J,1/10W M 100KOHM,J,1/10W M 1.0KOHM, J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 2.2KOHM,J,1/10W M 330 OHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 1KOHM,J,1/10W M 1KOHM,J,1/10W	1 2 1 1 1 1 1 1 1 1 1 2	
R535,36 R537 R538 R539 R540 R541 R542 R543 R544 R545 R544 R545 R546,47	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, 1/10W M 100KOHM,J,1/10W M 1.0KOHM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 2.2KOHM,J,1/10W M 330 OHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 1KOHM,J,1/10W	1 2 1 1 1 1 1 1 1 1 2 1	
R535,36 R537 R538 R539 R540 R541 R542 R543 R544 R545 R544 R545 R546,47 R548 R549 R550	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, J,1/10W M 100KOHM,J,1/10W M 1.0KOHM, J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 2.2KOHM,J,1/10W M 330 OHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 1KOHM,J,1/10W M 1KOHM,J,1/10W M 1KOHM,J,1/10W M 1KOHM,J,1/10W	1 2 1 1 1 1 1 1 1 1 1 2 1 1	
R535,36 R537 R538 R539 R540 R541 R542 R543 R544 R545 R546,47 R548 R549 R550 R551	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ8GEYJ102 ERJ6GEYJ102 ERJ6GEYJ104	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, J,1/10W M 100KOHM,J,1/10W M 1.0KOHM, J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 1KOHM,J,1/10W M 330 OHM,J,1/10W M 1KOHM,J,1/10W M 1MOHM,J,1/10W	1 2 1 1 1 1 1 1 1 1 2 1 1 1	
R535,36 R537 R538 R539 R540 R541 R542 R543 R544 R545 R546,47 R548 R549 R550 R551 R552	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ105 ERJ6GEYJ104	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, J,1/10W M 100KOHM,J,1/10W M 1.0KOHM, J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 1KOHM,J,1/10W M 330 OHM,J,1/10W M 1KOHM,J,1/10W M 1MOHM,J,1/10W	1 2 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1	
R535,36 R537 R538 R539 R540 R541 R542 R543 R544 R545 R546,47 R548 R549 R550 R551 R552 R553	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ105 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, J,1/10W M 100KOHM,J,1/10W M 1.0KOHM, J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 1MOHM,J,1/10W M 100KOHM,J,1/10W M 1XOHM,J,1/10W M 1XOHM,J,1/10W M 1KOHM,J,1/10W	1 2 1 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1 1	
R535,36 R537 R538 R539 R540 R541 R542 R543 R544 R545 R546,47 R548 R549 R550 R551 R552 R553 R554	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6ENF3602 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ105 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, J,1/10W M 100KOHM,J,1/10W M 1.0KOHM, J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 1MOHM,J,1/10W M 100KOHM,J,1/10W M 1XOHM,J,1/10W M 1XOHM,J,1/10W M 3.3KOHM,J,1/10W	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R535,36 R537 R538 R539 R540 R541 R542 R543 R544 R545 R546,47 R548 R5549 R550 R551 R552 R553 R554 R555,56	ERJ8GEYJ224 ERJ6GEYJ102 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ105 ERJ6GEYJ105 ERJ6GEYJ105 ERJ6GEYJ104 ERJ6GEYJ105 ERJ6GEYJ105 ERJ6GEYJ105 ERJ6GEYJ105 ERJ6GEYJ105 ERJ6GEYJ105	M 220KOHM, J,1/8W M 1KOHM,J,1/10W M 36KOHM, J,1/10W M 100KOHM,J,1/10W M 1.0KOHM, J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1KOHM,J,1/10W M 1MOHM,J,1/10W M 13.1/10W M 1KOHM,J,1/10W M 1.7KOHM,J,1/10W M 1.7KOHM,J,1/10W M 1.7KOHM,J,1/10W M 1MOHM,J,1/10W	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R560	ERJ6ENF1302	M 13KOHM, 1/10W	1	
R561	ERJ6ENF4301	M 4.3KOHM, 1/10W	1	
R562	ERJ6ENF1802	M 18KOHM, 1/10W	1	
R563	ERJ6GEYJ2R2	M 2.2 OHM, J, 1/10W	1	
R564	ERJ6GEYJ474	M 470KOHM, J, 1/10W	1	
R565 R566	ERJ6GEYJ334 ERJ6GEYJ104	M 330KOHM,J,1/10W M 100KOHM,J,1/10W	1	
R567	ERJ8GEYJ472		1	
R568,69	ERG2SJ181	M 4.7KOHM, J,1/8W M 180 OHM, J, 2W	2	
R570	ERJ8GEYJ102	M 1KOHM, J,1/8W	1	
R571	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R572,73	ERJ8ENF3900	M 390 OHM, 1/8W	2	
R574	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R575	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R576	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R577,78	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R579	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R580,81	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R582	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R583	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R584	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R585	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R586,87	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R588	ERJ8ENF3900	M 390 OHM, 1/8W	1	
R589,90	ERJ8GEYJ123	M 12KOHM, J,1/8W	2	
R591	ERJ6GEYJ105	M 1MOHM, J, 1/10W	1	
R592 R593	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R593	ERJ6ENF5601 ERJ6GEYJ103	M 5.6KOHM, 1/10W M 10KOHM,J,1/10W	1	
R595	ERJ8GEYJ222		1	
R596	ERJ6ENF1002	M 2.2KOHM, J,1/8W M 10KOHM, 1/10W	1	
R597,98	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R599,00	ERJ8GEYJ391	M 390 OHM, J,1/8W	2	
R601	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R602	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R603	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R604	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	
R606	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R607	ERJ6GEYJ822	M 8.2KOHM,J,1/10W	1	
R608	ERJ8GEYJ332	M 3.3KOHM, J,1/8W	1	
R609	ERJ6GEYJ822	M 8.2KOHM,J,1/10W	1	
R610,11	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R612	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R613	ERJ6ENF1602	M 16KOHM, 1/10W	1	
R614	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R615-17	ERJ6GEYJ103	M 10KOHM, J, 1/10W	3	
R618	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R619	ERJ8RQFR68	M 0.680HM, J,1/8W	1	
R620	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R621 R622	ERJ8GEYJ123 ERJ8ENF1503	M 12KOHM, J,1/8W M 15KOHM, 1/8W	1	
R623	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R624	ERX2SJR22	M0.22 OHM, J, 2W	1	
R625	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R626	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R627	ERJ6GEYJ822	M 8.2KOHM,J,1/10W	1	
R628	EVMAASA00B33	CONTROL 3KOHMB	1	
R629	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R630	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R631	ERJ8GEYJ333	м 33КОНМ, J,1/8W	1	
R632	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R633	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R634	ERJ8RQFR68	м 0.680HM, J,1/8W	1	
R636	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R637	ERJ8RQFR68	M 0.680HM, J,1/8W	1	
R640	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R641	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R642-44	ERJ8RQFR68	M 0.680HM, J,1/8W	3	
R645	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R646,47	ERJ6GEYJ223	M 22KOHM, J, 1/10W	2	
R648 R649	ERJ8ENF1503	M 15KOHM, 1/8W M 22KOHM,J,1/10W	1	
R650	ERJ6GEYJ223 ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
1-1000		101101111,0,1/10W		

Ref.	Part No.	Part Name &	Pcs	Remarks
No. R651	ERJ6GEYJ473	Description	1	
R652	ERJ6ENF9101	M 47KOHM,J,1/10W M 9.1KOHM, 1/10W	1	
R653	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R654	ERJ8GEYJ101	M 100 OHM, J,1/8W	1	
R655	ERJ8RQJR39	MO.39 OHM, 1/8W	1	
R656	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R657	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R658	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R659	ERJ6ENF3002	M 30KOHM, 1/10W	1	
R660	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R661	EVMAASA00B53	CONTROL 5KOHMB	1	
R662	ERJ6ENF1303	M 130KOHM, 1/10W	1	
R663	ERJ3GEYJ2R2	M 2.2 OHM, J, 1/16W	1	
R664	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R665 R666	EVMAASA00B23 ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R667,68	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
R669	ERJ6ENF1303	M 130KOHM, 1/10W	1	
R670	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R671	EVMAASA00B14	CONTROL 10KOHMB	1	
R674	ERJ8GEYJ333	м 33КОНМ, J,1/8W	1	
R675	ERJ3GEYJ2R2	M 2.2 OHM, J, 1/16W	1	
R676	ERJ8GEYJ333	м 33конм, J,1/8W	1	
R677	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R678	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R679,80	ERJ8RQJR39	MO.39 OHM, 1/8W	2	
R681	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R682	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R683	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R684	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R685	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R686	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R687 R688	ERJ6GEYJ103 ERJ6GEYJ223	M 10KOHM,J,1/10W M 22KOHM,J,1/10W	1	
R689	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R690	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R691	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R692,93	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
R694	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R695	ERJ6ENF1602	M 16KOHM, 1/10W	1	
R696	ERJ8GEYJ100	M 10 OHM, J,1/8W	1	
R697	ERJ6GEYJ104	м 100КОНМ,J,1/10W	1	
R698	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R702	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R703,04	ERG2SJ101	M 100 OHM, J, 2W	2	
R706	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R707 R708	ERJ6GEYJ102 ERJ6GEYJ104	M 1KOHM, J, 1/10W	1	
R712	ERJ6GEY0R00	M 100KOHM, J, 1/10W M 0 OHM, 1/10W	1	
R713	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R901	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R903-06	ERJ8ENF1203	M 12KOHM, 1/8W	4	
R907	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R908	ERJ6GEYJ335	M 3.3MOHM,J,1/10W	1	
R909-11	ERJ6GEYJ106	M 10MOHM,J,1/10W	3	
R912	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R913,14	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R915	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R916	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R917	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R918	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R920 R921	ERJ6GEYJ104 ERJ6RBD3092	M 100KOHM, J, 1/10W M30.9KOHM, F, 1/10W	1	
R921 R922	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R925	ERJ6GEYJ335	M 3.3MOHM, J, 1/10W	1	
R926,27	ERG2DJW224E	M 220KOHM, J, 2W	2	
R928-31	ERJ8ENF1203	M 12KOHM, 1/8W	4	
R932	ERJ6GEYJ105	M 1MOHM, J, 1/10W	1	
RL402	TSEH8011	RELAY	1	Δ
RL403	TSE10801	RELAY	1	Δ
S401,02	J0LT00000009	SWITCH	2	$\triangle$

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
T401	G4D4A0000107	SWITCHING	1	
		TRANSFORMER		
<b>T402</b>	G4D1A0000098	SWITCHING	1	$\triangle$
		TRANSFORMER		
T404	G4D4A0000109	SWITCHING TRANSFORMER	1	$\Delta$
<b>T4</b> 07	ETQ11K5AZ	CHOKE TRANS	1	$\triangle$
<b>T41</b> 0	G4D2A0000229	SWITCHING TRANSFORMER	1	Δ
T601	G4D2A0000227	SWITCHING TRANSFORMER	1	
W2	ERDS2TJ391	С 390 ОНМ, Ј,1/4W	1	
X501	H2B400400021	CRYSTAL	1	
Z1,Z2	K4ZZ01000206	TERMINAL	2	
<b>Z41</b> 0	TMM7464-2	CLAMPER	1	
Z411	TMME190	CLAMPER	1	
Z412	TMM7443-3	CLAMPER	1	
Z413	TMM7464-2	CLAMPER	1	
Z414	TMME190	CLAMPER	1	
Z420	TMM23417	CLAMPER	1	
Z450-53	EYF52BCY	FUSE HOLDER	4	
ZN401,0 2	D4EAD6210001	VARISTOR	2	Δ
ZN403	D4EA8511A001	VARISTOR	1	Δ
ZN404	D4EAB681A011	VARISTOR	1	Δ

## 16.3. Electrical Replacement Parts List (42inch)

## Note:

All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by AVC-SPC.

Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F401.40	K5D802BNA005	TIME LAG FUSE HIGH	2	<u> </u>
C001	ECJ1XC1H221J	C 220PF, J, 50V	1	TH-42PA50H/M
C001	ECA0JM102	E 1000UF, 6.3V	1	TH-42PA50A
C002	ECA1HM100	E 10UF, 50V	1	TH-42PA50H/M
	ECA1HM100	E 10UF, 50V	2	TH-42PA50A
C003	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	TH-42PA50H/M
				IH-42PAJOH/M
C004	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C005	ECJ1XC1H220J	C 22PF, J, 50V	1	
C006	ECA0JM102	E 1000UF, 6.3V	1	TH-42PA50H/M
C006	ECJ1XC1H220J	C 22PF, J, 50V	1	TH-42PA50A
C007	ECJ3VB1C474K	C 0.47UF, K, 16V	1	TH-42PA50H/M
C007	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-42PA50A
	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-42PA50H/M
C009	ECJ1XC1H101J	C 100PF, J, 50V	1	TH-42PA50H/M
C009	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	TH-42PA50A
C010,11	ECJ1XC1H330J	C 33PF, J, 50V	2	TH-42PA50H/M
C11	K1MN55BA0076	55P CONNECTOR	1	
C12	K1KA04BA0107	4P CONNECTOR	1	
C1MM2	TMME199	CLAMPER	1	
C013	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-42PA50A
C014	ECJ3YB0J335K	C 33UF, J, 25V	1	TH-42PA50H/M
C016	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-42PA50A
C017	ECJ3VB1C474K	C 0.47UF, K, 16V	1	TH-42PA50A
C018	ECJ1XC1H330J	C 33PF, J, 50V	2	TH-42PA50A
C019	ECJ1XC1H220J	C 22PF, J, 50V	1	TH-42PA50H/M
C019	ECJ1XC1H330J	C 33PF, J, 50V	2	TH-42PA50A
				<b>+</b>
C020	ECA0JM102	E 1000UF, 6.3V	1	TH-42PA50H/M
C020	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-42PA50A
C021	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-42PA50H/M
C021	ECJ1XC1H101J	C 100PF, J, 50V	1	TH-42PA50A
C21	K1MN55BA0076	55P CONNECTOR	1	
C022	ECJ1XC1H101J	C 100PF, J, 50V	1	TH-42PA50H/M
C022	ECJ3YB0J335K	C 33UF, J, 25V	1	TH-42PA50A
			-	IH-42FAJUA
C22	K1KA04BA0107	4P CONNECTOR	1	
	K1KA12AA0153	12P CONNECTOR	1	
C023	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	TH-42PA50A
C024	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	TH-42PA50H/M
C024	ECJ1XC1H221J	C 220PF, J, 50V	1	TH-42PA50A
	ECJ3YB0J335K	C 33UF, J, 25V	1	TH-42PA50H/M
	ECJ1XC1H330J	C 33PF, J, 50V	2	TH-42PA50H/M
			-	
C036	ECJ1XC1H221J	C 220PF, J, 50V	1	TH-42PA50H/M
C037	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	TH-42PA50H/M
C038	ECJ3VB1C474K	C 0.47UF, K, 16V	1	TH-42PA50H/M
C040	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	TH-42PA50H/M
C041-43	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	TH-42PA50H/M
C1100	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1101,0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
	ECUIABICIU4K	C 0.10F, Z, 16V		
2	EG T1 201 01 0 1 0	0.0.177	-	
C1104	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1105,0	ECJ1XB0J105K	C 1UF, K, 16V	2	
6				
C1107	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C1108-		C 0.1UF, Z, 16V	4	
11	ECJ1XB1C104K			I
	ECJ1XB1C104K			
C1112	EEEHB1C100R	C 10PF, J, 16V	1	
C1112		C 10PF, J, 16V	1 2	
C1112 C1113,1	EEEHB1C100R			
C1112 C1113,1 4	EEEHB1C100R ECJ1XB1C104K	C 10PF, J, 16V C 0.1UF, Z, 16V	2	
C1112 C1113,1 4 C1115	EEEHB1C100R ECJ1XB1C104K EEEHB0G101R	C 10PF, J, 16V C 0.1UF, Z, 16V C 100PF, J, 4V	2	
C1112 C1113,1 4 C1115 C1116	EEEHB1C100R ECJ1XB1C104K EEEHB0G101R ECJ1XC1H102J	C 10PF, J, 16V C 0.1UF, Z, 16V C 100PF, J, 4V C 1000PF, J, 50V	2 1 1	
C1112 C1113,1 4 C1115 C1116 C1117-	EEEHB1C100R ECJ1XB1C104K EEEHB0G101R	C 10PF, J, 16V C 0.1UF, Z, 16V C 100PF, J, 4V	2	
C1112 C1113,1 4 C1115 C1116 C1117- 19	EEEHB1C100R ECJ1XB1C104K EEEHB0G101R ECJ1XC1H102J ECJ1XB1C104K	C 10PF, J, 16V C 0.1UF, Z, 16V C 100PF, J, 4V C 1000PF, J, 50V C 0.1UF, Z, 16V	2 1 1 3	
C1112 C1113,1 4 C1115 C1116 C1117-	EEEHB1C100R ECJ1XB1C104K EEEHB0G101R ECJ1XC1H102J	C 10PF, J, 16V C 0.1UF, Z, 16V C 100PF, J, 4V C 1000PF, J, 50V	2 1 1	

(72111	· · · · ·			
Ref.	Part No.	Part Name &	Pcs	Remarks
No. C1123.2	ECJ1XB1C104K	Description C 0.1UF, Z, 16V	2	
4		0 0.101, 2, 101	_	
C1125	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C1126	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	i e	C 1000PF, J, 50V	1	
9	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1130	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C1131	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1132	EEEHB1C100R	C 10PF, J, 16V	1	
C1133,3	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1135		C 1000PF, J, 50V	1	
C1136- 39	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C1140	EEEHB1E330P	C 33PF, J, 25V	1	
C1141	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C1150	EEEHB1E330P	C 33PF, J, 25V	1	
C1152	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1155	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1170	EEUHP1C100R EEEHB1C470P	E 10UF, 16V	1	
C1171 C1172	ECJ1XB1C104K	C 47PF, J, 16V C 0.1UF, Z, 16V	1	
C1174	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1175	ECJ1XC1H151J	C 150PF, J, 50V	1	
C1178	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1181,8	EEEHB0G101R	C 100PF, J, 4V	2	
2 C1186	EC 11701 U1 03K	C 0 001HE K 50V	1	
C1187	ECJ1XC1H180J	C 0.001UF, K, 50V C 18PF, J, 50V	1	
C1188	ECJ1XC1H220J	C 22PF, J, 50V	1	
C1193	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1194	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C1195	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1196- 98	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C1200,0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1202	EEEHB0G101R	C 100PF, J, 4V	1	
C1203	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1204	ECJ1XB0J105K ECJ1XC1H271J	C 1UF, K, 16V C 270PF, J, 50V	2	
6	Ecomorniz / 10	0 270217 07 307	_	
		C 0.1UF, Z, 16V	1	
C1208	ECJ1XC1H271J	C 270PF, J, 50V	1	
C1209 C1211	EEEHB0G101R ECJ1XB1C104K	C 100PF, J, 4V C 0.1UF, Z, 16V	1	
C1212,1	ECJ1XC1H271J	C 270PF, J, 50V	2	
3 C1214-	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
16				
C1217,1 8	ECJ1XC1H271J	C 270PF, J, 50V	2	
C1219	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C1220,2 1	ECJ1XC1H101J	C 100PF, J, 50V	2	
C1222	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C1223-	ECJ1XC1H680J	C 68PF, J, 50V	3	
25 C2005,0	ECJ1XC1H561J	C 560PF, J, 50V	2	
6 C2010,1	ECJ1XC1H561J	C 560PF, J, 50V	2	
1 C2013,1	ECJ1XC1H561J	C 560PF, J, 50V	2	
	ECJ1XC1H561J	C 560PF, J, 50V	2	
7 C2019	ECA1CM221	E 220UF, 16V	1	
C2019	ECA1CM221 ECA1HM220	E 22UF, 50V	1	
C2111	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2116	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2118,1 9	ECEA1CN470U	E 47UF, 16V	2	
C2124	ECJ3XB1C106M	C 1.0UF, K, 16V	1	

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks
	ECJ1VB1H102K	С	1000PF, K, 50V	2	
C2127	ECA1CMH101	E	100UF, 16V	1	
C2128	ECJ2VF1C104Z	С	0.1UF, Z, 16V	1	
C2129,3	F1J1A1050002	С	1UF, Z, 50V	2	
C2131	ECJ2VF1C104Z	С	0.1UF, Z, 16V	1	
C2132	ECA1HM100	E	10UF, 50V	1	
C2133,3	ECJ1XC1H470J	С	47PF, J, 50V	2	
C2143	ECJ1VB1H103K	С	0.001UF, K, 50V	1	
C2146	ECJ2VF1C104Z	С	0.1UF, Z, 16V	1	
C2147	ECA1HM220	E	22UF, 50V	1	
C2148- 50	ECJ2FB1C105K	С	1UF, Z, 16V	3	
C2152	ECJ2FB1C105K	С	1UF, Z, 16V	1	
C2153	ECJ2FF1C475Z	_	0.047UF, Z, 16V	1	
C2154	ECJ2VF1C104Z	-	0.1UF, Z, 16V	1	
C2159,6 0	ECJ2FB1C105K	С	1UF, Z, 16V	2	
C2161	ECA1CMH101	1	100UF, 16V	1	
5	ECJ2FB1C105K		1UF, Z, 16V	2	
C2172	ECJ1VB1H102K	_	1000PF, K, 50V	1	
C2173	ECJ1VB1H103K		0.001UF, K, 50V	1	
C2174	ECJ1VB1H102K		1000PF, K, 50V	1	
C2175- 77	ECJ1VB1H103K		0.001UF, K, 50V	3	
C2178,7 9	ECA1HM100		10UF, 50V	2	
C2181	ECJ2VF1C104Z		0.1UF, Z, 16V	1	
C2183 C2184,8	ECA1HM3R3 ECJ2VF1C104Z		3.3UF, 50V 0.1UF, Z, 16V	2	
	ECJ2FB1C105K	С	1UF, Z, 16V	2	
0 C2191	ECJ2VF1C104Z	_	0.1UF, Z, 16V	1	
C2192	ECA1HM100		10UF, 50V	1	
	ECJ2FB1C105K		1UF, Z, 16V	2	TH-42PA50A
4					
C2195	ECJ1XC1H470J	С	47PF, J, 50V	1	
C2196	ECJ2VF1C104Z		0.1UF, Z, 16V	1	
C2197	ECJ2VF1C105Z		1UF, Z, 16V	1	
C2198	ECA1CMH101	_	100UF, 16V	1	
C2199 C2200		+	56PF, J, 50V	1	
2		_	47PF, J, 50V	1 2	
<u> </u>	ECJ1XC1H050C	_	5PF, C, 50V	2	
C2203	ECJ1XC1H050C ECJ1VC1H100C	c c	5PF, C, 50V 10PF, C, 50V	2	
C2203 C2204	ECJ1XC1H050C ECJ1VC1H100C ECJ1XC1H220J	c c c	5PF, C, 50V 10PF, C, 50V 22PF, J, 50V	2 1 1	
C2203 C2204 C2206	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101	C C E	5PF, C, 50V 10PF, C, 50V 22PF, J, 50V 100UF, 16V	2 1 1	
C2203 C2204 C2206 C2207	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z	C C E C	5PF, C, 50V 10PF, C, 50V 22PF, J, 50V 100UF, 16V 0.1UF, Z, 16V	2 1 1 1 1	MH_40D2502
C2203 C2204 C2206 C2207 C2208	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z	C C E C	5PF, C, 50V 10PF, C, 50V 22PF, J, 50V 100UF, 16V 0.1UF, Z, 16V 0.1UF, Z, 16V	1 1 1 1 1	TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z	C C C C	5PF, C, 50V 10PF, C, 50V 22PF, J, 50V 100UF, 16V 0.1UF, Z, 16V 0.1UF, Z, 16V 0.1UF, K, 16V	2 1 1 1 1 1 1	TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212	ECJ1XC1H050C ECJ1VC1H100C ECJ1XC1H220J ECA1CMH101 ECJ2VF1C104Z ECJ1XF1C104Z ECJ1VB1C104K ECJ1XF1C104Z	C C E C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, Z, 16V	1 1 1 1 1	TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z	C C C C C C	5PF, C, 50V 10PF, C, 50V 22PF, J, 50V 100UF, 16V 0.1UF, Z, 16V 0.1UF, Z, 16V 0.1UF, K, 16V	2 1 1 1 1 1 1 1	TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1VB1C104K  ECJ1XF1C104Z	C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, K, 16V	2 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1VB1C104K  ECJ1XF1C104Z  ECJ1VB1C104K  ECJ1VB1C104K	C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, K, 16V  10UF, K, 16V	1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1VB1C104K  ECJ1XF1C104Z  ECJ1VB1C104K  ECJ1VB1C104K  ECJ1VB1C104K	C C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, K, 16V	1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z	C C C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V	1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222 C2223 C2226	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XC1H390J  ECJ2FB1C105K  ECJ1VB1H102K	C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, K, 16V  1000PF, K, 50V  0.1UF, Z, 16V  39PF, J, 50V  1UF, Z, 16V  1000PF, K, 50V	2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222 C2223 C2223	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ2VF1C104Z  ECJ2VF1C104Z  ECJ2VF1C104Z  ECJ2VF1C105K	C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, K, 16V  1000PF, K, 50V  0.1UF, Z, 16V  39PF, J, 50V  1UF, Z, 16V	1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222 C2223 C2225 C2226 C2300,0 1 C2305	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1VB1C104K  ECJ1VB1C104K  ECJ1VB1C104K  ECJ1VB1C104C  ECJ2VF1C104Z  ECJ2VF1C104Z  ECJ2VF1C104Z  ECJ2VF1C104Z  ECJ1XC1H390J  ECJ2FB1C105K  ECJ1VB1H102K  ECJ1VB1H104Z	C C C C C C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, K, 16V  1000PF, K, 50V  0.1UF, Z, 16V  39PF, J, 50V  1000PF, K, 50V  0.1UF, Z, 16V  1000PF, K, 50V  0.1UF, Z, 16V  1000PF, K, 50V	2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222 C2223 C2225 C2226 C2300,0 1 C2305 C2306	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104K  ECJ1XF1C104K  ECJ1YB1C104K  ECJ1YB1C104K  ECJ1YB1C104K  ECJ1YB1C104K  ECJ1YB1C104C  ECJ1YB1C104Z  ECJ2VF1C104Z  ECJ2VF1C104Z  ECJ1XC1H390J  ECJ2FB1C105K  ECJ1VB1H102K  ECJ1VF1H104Z  ECJ1VF1H104Z	C C C C C C C C C C C C C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, K, 16V  1000PF, K, 50V  0.1UF, Z, 16V  39PF, J, 50V  1UF, Z, 16V  1000PF, K, 50V  0.1UF, Z, 16V  1000PF, K, 50V  1UF, Z, 16V  1000PF, K, 50V	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222 C2223 C2223 C2226 C2300,0 1 C2305 C2306 C2307	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1VB1C104K  ECJ1VB1C104K  ECJ1VB1C104Z  ECJ1VB1C104Z  ECJ1VB1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1XC1H390J  ECJ2FB1C105K  ECJ1VB1H104Z  ECJ1VB1H104Z  ECA1CMH101  ECJ1VB1H103K  ECA1CMH101	C C C C C C C C C C C C E C E	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, K, 16V  1000PF, K, 50V  0.1UF, Z, 16V  101F, Z, 16V  1000PF, K, 50V  1UF, Z, 16V  1000PF, K, 50V  1UF, Z, 16V  1000PF, K, 50V  1000PF, K, 50V  1000PF, K, 50V	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222 C2223 C2225 C2226 C2300,0 1 C2305 C2306	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104K  ECJ1XF1C104K  ECJ1YB1C104K  ECJ1YB1C104K  ECJ1YB1C104K  ECJ1YB1C104K  ECJ1YB1C104C  ECJ1YB1C104Z  ECJ2VF1C104Z  ECJ2VF1C104Z  ECJ1XC1H390J  ECJ2FB1C105K  ECJ1VB1H102K  ECJ1VF1H104Z  ECJ1VF1H104Z	C C C C C C C C C C C C C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, K, 16V  1000PF, K, 50V  0.1UF, Z, 16V  39PF, J, 50V  1UF, Z, 16V  1000PF, K, 50V  0.1UF, Z, 16V  1000PF, K, 50V  1UF, Z, 16V  1000PF, K, 50V	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222 C2223 C2225 C2226 C2300,0 1 C2305 C2306 C2307 C2308,0 9 C2310,1 1	ECJ1XC1H050C  ECJ1XC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1YB1C104K  ECJ1YB1C104K  ECJ1VB1H102K  ECJ1YF1C104Z  ECJ2VF1C104Z  ECJ2VF1C104Z  ECJ1XC1H390J  ECJ2FB1C105K  ECJ1VB1H102K  ECJ1VF1H104Z  ECJ1VF1H104Z  ECA1CMH101  ECJ1VB1H103K	C C E C C C C C C C C C C C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, K, 16V  1000PF, K, 50V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  1000PF, K, 50V  1UF, Z, 16V  1000PF, K, 50V  1UF, Z, 16V  1000PF, K, 50V  1000F, K, 50V  0.01UF, Z, 50V	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222 C2223 C2225 C2226 C2300,0 1 C2305 C2306 C2307 C2308,0 9 C2310,1 1 C2314	ECJ1XC1H050C  ECJ1VC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1YB1C104K  ECJ1YB1C104K  ECJ1VB1H102K  ECJ1VB1H102K  ECJ2VF1C104Z  ECJ1YB1C104Z  ECJ1YB1H102K  ECJ1YB1H103K  ECJ1VB1H103K  ECA1CMH101  ECJ1VB1H103K  ECJ1YB1H103K  ECJ1YB1H103K  ECJ1YB1H103K  ECJ1YB1H103K  ECJ1YB1H103K  ECJ1YB1H103K	C C C C C C C C C C C C C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, X, 16V  0.1UF, K, 16V  1000PF, K, 50V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  1000PF, K, 50V  1UF, Z, 16V  1000PF, K, 50V  1000PF, K, 50V  1000F, K, 50V  0.01UF, Z, 50V  0.001UF, X, 50V	2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222 C2223 C2225 C2226 C2300,0 1 C2305 C2308,0 9 C2310,1 1 C2314 C2315	ECJ1XC1H050C  ECJ1XC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1VB1C104K  ECJ1VB1C104K  ECJ1VB1C104Z  ECJ1VB1C104Z  ECJ1VB1C104Z  ECJ1VB1H102K  ECJ2VF1C104Z  ECJ1XC1H390J  ECJ2FB1C105K  ECJ1VB1H102K  ECJ1VB1H103K  ECJ1VB1H103K  ECA1CMH101  ECJ1VB1H103K  ECJ1VB1H103K  ECJ1VB1H103K  ECJ1VB1H562K  ECJ1VB1H562K  ECA1CHG470	C C C C C C C C C C C C C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  1000PF, K, 50V  1UF, Z, 16V  1000PF, K, 50V  1000F, K, 50V  0.1UF, Z, 50V  0.01UF, Z, 50V  0.001UF, K, 50V  0.001UF, K, 50V  0.001UF, K, 50V  0.001UF, K, 50V	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222 C2223 C2225 C2226 C2300,0 1 C2305 C2308,0 9 C2310,1 1 C2314 C2315 C2316	ECJ1XC1H050C  ECJ1XC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1YB1C104K  ECJ1YB1C104K  ECJ1VB1H102K  ECJ1VB1H102K  ECJ2VF1C104Z  ECJ1YB1C104Z  ECJ1YB1H102K  ECJ1YB1H102K  ECJ1YB1H103K  ECJ1YB1H103K  ECA1CMH101  ECJ1YB1H103K  ECJ1YB1H103K	C C E C C C C C C C C C C C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, X, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  1000PF, K, 50V  1UF, Z, 16V  1000PF, K, 50V  100UF, Z, 50V  100UF, K, 50V  0.01UF, X, 50V  0.01UF, X, 50V  0.001UF, K, 50V  5600PF, K, 50V  47UF, 16V  0.1UF, Z, 16V	2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
C2203 C2204 C2206 C2207 C2208 C2211 C2212 C2213 C2214 C2215 C2222 C2223 C2225 C2226 C2300,0 1 C2305 C2308,0 9 C2310,1 1 C2314 C2315	ECJ1XC1H050C  ECJ1XC1H100C  ECJ1XC1H220J  ECA1CMH101  ECJ2VF1C104Z  ECJ1XF1C104Z  ECJ1XF1C104Z  ECJ1VB1C104K  ECJ1VB1C104K  ECJ1VB1C104Z  ECJ1VB1C104Z  ECJ1VB1C104Z  ECJ1VB1H102K  ECJ2VF1C104Z  ECJ1XC1H390J  ECJ2FB1C105K  ECJ1VB1H102K  ECJ1VB1H103K  ECJ1VB1H103K  ECA1CMH101  ECJ1VB1H103K  ECJ1VB1H103K  ECJ1VB1H103K  ECJ1VB1H562K  ECJ1VB1H562K  ECA1CHG470	C C C C C C C C C C C C C C C C C C C	5PF, C, 50V  10PF, C, 50V  22PF, J, 50V  100UF, 16V  0.1UF, Z, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, K, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  0.1UF, Z, 16V  1000PF, K, 50V  1UF, Z, 16V  1000PF, K, 50V  1000F, K, 50V  0.1UF, Z, 50V  0.01UF, Z, 50V  0.001UF, K, 50V  0.001UF, K, 50V  0.001UF, K, 50V  0.001UF, K, 50V	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A

	T			
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2320	ECJ1VB1E473K	C 0.047UF, K, 25V	1	
C2322	ECJ1XC1H471J	C 470PF, J, 50V	1	
C2323	ECJ1VB1E473K	C 0.047UF, K, 25V	1	
C2324	ECJ1XC1H471J	C 470PF, J, 50V	1	
C2325	ECJ1VB1E473K	C 0.047UF, K, 25V	1	
C2327 C2328	ECJ1XC1H471J ECJ1VB1E473K	C 470PF, J, 50V C 0.047UF, K, 25V	1	
C2329-	ECJ1VB1H332K	C 3300PF, K, 50V	4	
32				
C2358	ECA1CMH101	E 100UF, 16V	1	
C2359	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2372 C2374	ECA1HHG100 ECA1HHG100	E 10UF, 50V E 10UF, 50V	1	
C2376- 79	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2384- 87	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2428,2 9	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C2430	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2433,3	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
C2441,4 2	ECJ1XC1H221J	C 220PF, J, 50V	2	
C2445,4	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2449,5 0	ECA1EHG331	E 330UF, 25V	2	
4	ECJ2FB1E105K	C 1UF, K, 25V	2	
8	ECJ2FB0J335K	C 3.3UF, K, 16V	2	
C2461,6 2	ECJ2XB1H332K	C 3300PF, K, 50V	2	
6	ECJ2FB1E105K	C 1UF, K, 25V	2	
0	ECJ2FB1E105K	C 1UF, K, 25V	2	
4	ECJ2FB1E105K	C 1UF, K, 25V	2	
8	ECJ2FB1E105K	C 1UF, K, 25V	2	
84	ECJ2FB1E224K	C 22UF, K, 25V	4	
0	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2497,9 8	ECJ2FB1E105K	C 10F, K, 25V	2	
C2512 C2515	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C3005	ECJ1VB1H103K ECJ2VF1C104Z	C 0.001UF, K, 50V C 0.1UF, Z, 16V	1	
C3005	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3021- 24	F1J1A1050002	C 1UF, Z, 50V	4	
C3032	ECJ2XB1A105K	C 1UF, K, 10V	1	
C3033	F1J1A1050002	C 1UF, Z, 50V	1	
C3035	F1J1A1050002	C 1UF, Z, 50V	1	
C3038	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3040	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3043 C3044	F1J1A1050002 ECJ2VF1C104Z	C 1UF, Z, 50V C 0.1UF, Z, 16V	1	
C3044	F1J1A1050002	C 1UF, Z, 50V	1	TH-42PA50H/M
C3047	F1J1A1050002	C 1UF, Z, 50V	1	
C3049,5	F1J1A1050002	C 1UF, Z, 50V	2	
C3054- 56	F1J1A1050002	C 1UF, Z, 50V	3	
C3058	ECA1CMH101	E 100UF, 16V	1	
C3059	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3060	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3062-	ECJ2VF1C104Z	C 0.1UF, Z, 16V	3	
C3066	ECJ2VF1C105Z	C 1UF, Z, 16V	1	mr. 40====================================
C3068	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	TH-42PA50H/M
C3069	ECA1EM471	E 470UF, 25V	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C3207	ECJ2FB1C105K	C 1UF, Z, 16V	1	
C3208	ECJ2XB1C474K	C 0.47UF, Z, 16V	1	
C3212	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3214	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C3216	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C3217,1 8	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
C3226- 29	ECJ2FF1A106Z	C 0.001UF, Z, 10V	4	
C3230	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3233	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3235	ECJ1VF1H104Z	· · · · · · · · · · · · · · · · · · ·	1	
C3236	ECA1HM100	E 10UF, 50V	1	
C3241- 43	ECJ2VF1C104Z	C 0.1UF, Z, 16V	3	
C3248	ECJ2FB1C105K	C 1UF, Z, 16V	1	TH-42PA50H/M
C3249	ECJ2XB1C474K	C 0.47UF, Z, 16V	1	TH-42PA50H/M
C3250	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-42PA50H/M
C3251	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3252	ECJ2FB1C105K	C 1UF, Z, 16V	1	TH-42PA50H/M
C3253- 55	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	TH-42PA50H/M
C3256	ECJ2FB1C105K	C 1UF, Z, 16V	1	TH-42PA50H/M
C3257- 61	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	TH-42PA50H/M
C3262- 64	ECJ1VB1H472K	C 4700PF, K, 50V	3	
C4001	EEVHB0G221P	E 220UF, 4V	1	
C4002	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4003	EEFCD0G560R	56UF,	1	
C4004	ECJ2YB0J225K	C 2.2UF, K, 6.3V	1	
C4005	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4006	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4014,1 5	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4016	ECJ1XC1H470J	C 47PF, J, 50V	1	
C4018	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4019	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C4020	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C4023,2 4	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4025	EEVHB0J470R	E 47UF, 6.3V	1	
C4026	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4027	EEEHB1E330P	C 33PF, J, 25V	1	
C4028,2 9	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C4030	EEEHB1C100R	C 10PF, J, 16V	1	
C4031- 33	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4035	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4036	EEVHB0J470R	E 47UF, 6.3V	1	
C4037	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4038,3	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4043- 45	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4047	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4048	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
			1	
C4049	ECJ1VB1H103K	C 0.001UF, K, 50V		
	ECJ1VB1H103K ECJ1XB1C104K	C 0.001UF, K, 50V C 0.1UF, Z, 16V	1	
C4050			<del>                                     </del>	
C4050 C4051	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4050 C4051 C4052 C4053,5	ECJ1XB1C104K ECJ1XC1H102J	C 0.1UF, Z, 16V C 1000PF, J, 50V	1	
C4050 C4051 C4052 C4053,5	ECJ1XB1C104K ECJ1XC1H102J ECJ1XB0J105K	C 0.1UF, Z, 16V C 1000PF, J, 50V C 1UF, K, 16V	1 1 1	
C4050 C4051 C4052 C4053,5 4 C4055	ECJ1XB1C104K ECJ1XC1H102J ECJ1XB0J105K ECJ1XB1C104K	C 0.1UF, Z, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.1UF, Z, 16V	1 1 1 2	
C4050 C4051 C4052 C4053,5 4 C4055 C4056 C4057,5	ECJ1XB1C104K ECJ1XC1H102J ECJ1XB0J105K ECJ1XB1C104K ECJ1VB1C823K	C 0.1UF, Z, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.1UF, Z, 16V C 0.082UF, K, 16V	1 1 1 2	
C4050 C4051 C4052 C4053,5 4 C4055 C4056 C4057,5	ECJ1XB1C104K ECJ1XC1H102J ECJ1XB0J105K ECJ1XB1C104K ECJ1VB1C823K ECJ1VB1H103K	C 0.1UF, Z, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.1UF, Z, 16V C 0.082UF, K, 16V C 0.001UF, K, 50V	1 1 1 2 1 1	
C4050 C4051 C4052 C4053,5 4 C4055 C4056 C4057,5 8 C4059	ECJ1XB1C104K ECJ1XC1H102J ECJ1XB0J105K ECJ1XB1C104K ECJ1VB1C823K ECJ1VB1H103K ECJ2VB1C104K	C 0.1UF, Z, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.1UF, Z, 16V C 0.082UF, K, 16V C 0.001UF, K, 50V C 0.1UF, K, 16V	1 1 2 1 1 1 2	
C4050 C4051 C4052 C4053,5 4 C4055 C4056 C4057,5 8 C4059	ECJ1XB1C104K ECJ1XC1H102J ECJ1XB0J105K ECJ1XB1C104K ECJ1VB1C823K ECJ1VB1H103K ECJ2VB1C104K	C 0.1UF, Z, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.1UF, Z, 16V C 0.082UF, K, 16V C 0.001UF, K, 50V C 0.1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V	1 1 2 1 1 2	
C4050 C4051 C4052 C4053,5 4 C4055 C4056 C4057,5 8 C4059 C4060 C4061	ECJ1XB1C104K ECJ1XC1H102J ECJ1XB0J105K ECJ1XB1C104K ECJ1VB1C823K ECJ1VB1H103K ECJ2VB1C104K EEVHB0J470R ECJ1XB1C104K	C 0.1UF, Z, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.1UF, Z, 16V C 0.082UF, K, 16V C 0.001UF, K, 50V C 0.1UF, K, 16V	1 1 2 1 1 2 1 2	
4 C4055 C4056	ECJ1XB1C104K ECJ1XC1H102J ECJ1XB0J105K ECJ1XB1C104K ECJ1VB1C823K ECJ1VB1H103K ECJ2VB1C104K EEVHB0J470R ECJ1XB1C104K EEVHB0J470R	C 0.1UF, Z, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.1UF, Z, 16V C 0.082UF, K, 16V C 0.001UF, K, 50V C 0.1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V E 47UF, 6.3V	1 1 2 1 1 2 1 1 1 1	
C4050 C4051 C4052 C4053,5 4 C4055 C4056 C4057,5 8 C4059 C4060 C4061 C4062 C4063	ECJ1XB1C104K ECJ1XC1H102J ECJ1XB0J105K ECJ1XB1C104K ECJ1VB1C823K ECJ1VB1H103K ECJ2VB1C104K EEVHB0J470R ECJ1XB1C104K EEVHB0J470R ECJ1XB1C104K	C 0.1UF, Z, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.1UF, Z, 16V C 0.082UF, K, 16V C 0.001UF, K, 50V C 0.1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V E 47UF, 6.3V C 0.1UF, Z, 16V	1 1 2 1 1 2 1 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C4072	ECJ2YB0J225K	C 2.2UF, K, 6.3V	1	
C4100-	ECJ3XB0J106M	C 10UF, M,6.3V	3	
02		1 ' '		
C4103	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4104	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4105	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4106	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4107	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4108	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4115-	ECJ3XB0J106M	C 10UF, M,6.3V	3	
17				
C4118-	ECJ1XC1H390J	C 39PF, J, 50V	3	
20				
C4121,2	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
2				
C4124	EEEHB1A101P	C 100PF, J, 10V	1	
	EEVHB0J470R	E 47UF, 6.3V	1	
C4127	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
			<del></del>	
C4128-	ECJ1VB1H103K	C 0.001UF, K, 50V	4	
31		<u> </u>	_	
C4132	EEEHB0G101R	C 100PF, J, 4V	1	
C4133	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4135	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4136	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4151	ECJ3YB0J335K	C 33UF, J, 25V	1	
C4152	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4153-	ECJ1VB1C105K	C 0.01UF, K, 16V	4	
56	TCOTABICIOSK	0.010F, R, 10V	"	
C4158-	ECJ1XC1H102J	C 1000PF, J, 50V	9	
66		J 10002E, 0, 50V	_	
	FC.T1YB1C104K	C 0.1UF, Z, 16V	1	
C4168	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C4170-	ECJ1VB1H103K	C 0.001UF, K, 50V	3	
72		- 0 4 46	_	
C4176	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
1 -	ECJ1VB1C105K	C 0.01UF, K, 16V	2	
8		<u> </u>	_	
C4179	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4180	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4181	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C4182	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4233	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4234	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4235	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4301,0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
2				
C4303	EEEHB1E330P	C 33PF, J, 25V	1	
C4306	ECJ1XC1H050C	C 5PF, C, 50V	1	
	ECJ1XC1H220J	C 22PF, J, 50V	2	
9	LCUIACINZZUU	5 22EE, U, 50V		
C4310-	ECJ1XB0J105K	C 1UF, K, 16V	4	
13	LOCIADOOTOSK	101, N, 10V	_	
C4314	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C4315-	ECJ1VF1A105Z	C 1UF, Z, 10V	3	
17	LCOIVEIRIUSZ	J 101, 2, 10V		
C4318	EEEHB1E330P	C 33DF .T 2517	1	
		C 33PF, J, 25V		
C4341	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4342	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4343	EEVHB0J470R	E 47UF, 6.3V	1	
C4345	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4346	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4348	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4350	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4351,5	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
2			<u></u>	
C4353	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4354	EEVHB0G221P	E 220UF, 4V	1	
C4355,5	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
6		<u> </u>		
C4358	ECJ1XC1H680J	C 68PF, J, 50V	1	
C4359-	ECJ1XB1C104K	C 0.1UF, Z, 16V	12	
70			L	
C4371	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4372-	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
74				
	ECJ1XB0J105K	C 1UF, K, 16V	1	

	Г	1		_
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4378	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4379	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4380	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4381	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4382	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4383	ECJ1VB1H562K	C 5600PF, K, 50V	1	
C4384- 88	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
1				
C4392,9	ECJ1VB0J225K	C 2.2UF, K, 6.3V	2	
	EEVHB0J470R	E 47UF, 6.3V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
3				
C4504	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4505	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4506	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4507 C4508	ECJ1XB1C104K ECJ1VB1C105K	C 0.1UF, Z, 16V C 0.01UF, K, 16V	1	
C4509	ECJ1XB1C104K	C 0.010F, R, 16V	1	
C4510	ECJ1VB1C104K	C 0.10F, Z, 16V	1	
C4511	ECJ1XB1C103K	C 0.1UF, Z, 16V	1	
C4512	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4513	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4514	EEVHB0J470R	E 47UF, 6.3V	1	
C4515	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4516-	ECJ1VB1C105K	C 0.01UF, K, 16V	3	
18		- 0 1 16		
C4519	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4521 C4522-	ECJ1XB0J105K ECJ1XB1C104K	C 1UF, K, 16V C 0.1UF, Z, 16V	3	
24	ECOTABICIO4K	C 0.10F, Z, 10V	,	
C4525	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4526	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4527,2	ECJ1XB0J105K	C 1UF, K, 16V	2	
lα		C 10F, K, 10V	-	
8 C4529				
8 C4529 C4530-	ECJ1VB1C105K ECJ1XB1C104K	C 0.01UF, K, 16V	1 5	
C4529	ECJ1VB1C105K		1	
C4529 C4530- 34 C4535	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K	C 0.01UF, K, 16V	1	
C4529 C4530- 34 C4535 C4536	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V	1 5 1	
C4529 C4530- 34 C4535 C4536 C4537	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V	1 5 1 1	
C4529 C4530- 34 C4535 C4536 C4537 C4538-	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V	1 5 1	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V	1 5 1 1	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R ECJ1XB1C104K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.01UF, K, 16V	1 5 1 1 1 14	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554-	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R ECJ1XB1C104K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V	1 5 1 1 1 14	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.01UF, K, 16V	1 5 1 1 1 14	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.01UF, K, 16V	1 5 1 1 14 2	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.01UF, K, 16V	1 5 1 1 14 2	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565-	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1VB1C105K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.01UF, K, 16V C 0.01UF, K, 50V	1 5 1 1 1 14 2	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1VB1C105K ECJ1XB1C105K ECJ1XB1C105K ECJ1XB1C104K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, X, 16V C 0.1UF, Z, 16V	1 5 1 1 1 14 2 3 2	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565-	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1VB1C105K ECJ1XB1C104K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.01UF, K, 16V C 0.01UF, K, 50V C 0.1UF, Z, 16V	1 5 1 1 14 2 3	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570-	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1VB1C105K ECJ1XB1C105K ECJ1XB1C105K ECJ1XB1C104K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, X, 16V C 0.1UF, Z, 16V	1 5 1 1 1 14 2 3 2	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576-	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1VB1C105K ECJ1XB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.1UF, J, 16V C 1000PF, J, 50V C 1000PF, J, 50V	1 5 1 1 1 1 14 2 3 2 1 4	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81	ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB0J105K ECYHB0J470R ECJ1XB1C104K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1H103K ECJ1XB0J105K ECJ1XC1H102J ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V	1 5 1 1 1 14 2 3 2 1 4 5	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582	ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB0J105K ECJ1XB0J105K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C105K ECJ1XC1H102J ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V	1 5 1 1 1 1 2 3 2 1 4 5 1 6	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81	ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB0J105K ECYHB0J470R ECJ1XB1C104K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1H103K ECJ1XB0J105K ECJ1XC1H102J ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V	1 5 1 1 1 14 2 3 2 1 4 5	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583-	ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB0J105K ECJ1XB0J105K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C105K ECJ1XC1H102J ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V	1 5 1 1 1 1 2 3 2 1 4 5 1 6	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583- 95	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K ECVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB1H103K ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, Z, 16V  C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1000PF, J, 50V C 1000PF, J, 50V	1 5 1 1 1 1 2 3 2 1 4 5 1 6 1 1 3	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583- 95 C4596	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1VB1H103K ECJ1XB0J105K EEVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB0J105K ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1VB1C105K ECJ1VB1C105K ECJ1VB1C105K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, Z, 16V  C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1000PF, J, 50V C 1000PF, J, 50V C 0.01UF, K, 16V C 0.001UF, K, 16V C 0.001UF, K, 16V	1 5 1 1 1 1 2 3 2 1 4 5 1 1 6	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583- 95 C4596 C4597 C4598 C4599,0	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K ECJ1XB0J105K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C105K ECJ1XB1C104K ECJ1XB1C105K ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.01UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, Z, 16V  C 10UF, Z, 16V  C 10UF, Z, 16V  C 10UF, Z, 16V  C 10UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1000PF, J, 50V C 1000PF, J, 50V C 0.01UF, K, 16V C 1000PF, J, 50V	1 5 1 1 1 1 1 2 3 2 1 4 5 1 1 6 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583- 95 C4596 C4597 C4598 C4599,0 0	ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB0J105K ECJ1XB0J105K ECVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C105K ECJ1XB1C105K ECJ1XB1C104K ECJ1XB0J105K ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, K, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V	1 5 1 1 1 1 2 2 3 2 1 4 5 1 1 6 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583- 95 C4596 C4597 C4598 C4599,0 0 C4601	ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB0J105K ECJ1XB0J105K ECVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C105K ECJ1XB1C104K ECJ1XB0J105K ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, K, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V	1 5 1 1 1 1 2 2 3 2 1 4 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583- 95 C4596 C4597 C4598 C4599,0 0 C4601 C4602	ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB0J105K ECYHB0J470R ECJ1XB1C104K ECJ1XB1C105K ECJ1XB1C105K ECJ1XB1C105K ECJ1XB1C105K ECJ1XB0J105K ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, K, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V C 33PF, J, 6.3V C 0.1UF, Z, 16V	1 5 1 1 1 1 2 3 2 1 4 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583- 95 C4596 C4597 C4598 C4599,0 0 C4601	ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB0J105K ECJ1XB0J105K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C105K ECJ1XB1C104K ECJ1XB0J105K ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, K, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V	1 5 1 1 1 1 2 2 3 2 1 4 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C4529 C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583- 95 C4596 C4597 C4598 C4599,0 0 C4601 C4602 C4605	ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB0J105K ECYHB0J470R ECJ1XB1C104K ECJ1XB1C105K ECJ1XB1C105K ECJ1XB1C105K ECJ1XB1C105K ECJ1XB0J105K ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, K, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V C 33PF, J, 6.3V C 0.1UF, Z, 16V	1 5 1 1 1 1 2 3 2 1 4 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583- 95 C4596 C4597 C4598 C4599,0 0 C4601 C4602 C4605 C4607-	ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C104K ECJ1XB0J105K ECJ1XB0J105K ECJ1XB1C104K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C105K ECJ1XB1C104K ECJ1XB0J105K ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.001UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, K, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V	1 5 1 1 1 1 2 3 2 1 4 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583- 95 C4596 C4596 C4599,0 0 C4601 C4602 C4605 C4607- 10	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K ECVHB0J470R ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C105K ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XB0J105K ECJ1XC1H102J ECJ1XB0J105K ECJ1XC1H102J ECJ1VB1C105K ECJ1XC1H102J ECJ1VB1C105K ECJ1XC1H102J	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.01UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, K, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V C 10TF, K, 16V C 1000PF, J, 50V C 10TF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 1000PF, J, 50V C 1UF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V C 0.001UF, K, 50V	1 5 1 1 1 1 2 3 2 1 4 4 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C4529 C4529 C4530- 34 C4535 C4536 C4537 C4538- 51 C4552,5 3 C4554- 56 C4560,6 1 C4562 C4565- 68 C4570- 74 C4575 C4576- 81 C4582 C4583- 95 C4596 C4597 C4598 C4599,0 0 C4601 C4602 C4605 C4607- 10 C4611	ECJ1VB1C105K ECJ1XB1C104K ECJ1VB1H103K ECJ1XB0J105K ECVHB0J470R ECJ1XB1C104K ECJ1XB1C104K ECJ1VB1C105K ECJ1XB1C104K ECJ1XB1C105K ECJ1XB1C104K ECJ1XB1C105K ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XC1H102J ECJ1XB0J105K ECJ1XC1H102J ECJ1XB0J105K ECJ1XC1H102J ECJ1XB0J105K	C 0.01UF, K, 16V C 0.1UF, Z, 16V C 0.01UF, K, 50V C 1UF, K, 16V E 47UF, 6.3V C 0.1UF, Z, 16V  C 0.01UF, K, 16V C 0.01UF, K, 16V C 0.01UF, K, 16V C 1000PF, J, 50V C 10TF, K, 16V C 0.001UF, K, 50V C 1UF, K, 16V C 33PF, J, 6.3V C 0.1UF, Z, 16V C 0.001UF, K, 50V	1 5 1 1 1 1 2 3 2 1 4 4 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	rare no.	Description	100	ROMOTAS
C4702	EEFCD0G560R	56UF,	1	
C4703	EEEHB0J220R	C 22PF, J, 6.3V	1	
C4704	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4709	EEVHB0J470R	E 47UF, 6.3V	1	
C4710,1	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
1 C4712	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4712	ECJ1XB1C103K	C 0.1UF, Z, 16V	1	
C4714	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4715	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4716	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4717	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4718	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4719-	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
22	E0.717E1.01.02E	C 0 010777 7 1677	-	
C4723	ECJ1VB1C103K ECJ1XB1C104K	C 0.010UF, K, 16V C 0.1UF, Z, 16V	1	
C4725	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4726	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4727	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4728	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4729	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4730	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4731	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4732	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4733	ECJ1VB1C103K	C 0.010UF, K, 16V	1	
C4734	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4735	ECJ1VB1C103K	C 0.010UF, K, 16V C 0.1UF, Z, 16V	1	
C4736 C4737	ECJ1XB1C104K ECJ1VB1C103K	C 0.10F, Z, 16V	1	
C4855,5	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
6			_	
C4858	EEVHB0G221P	E 220UF, 4V	1	
C4859	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4861	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4863	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4864	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C4867,6	ECJ1XC1H101J	C 100PF, J, 50V	2	
C4873	EEVHB0J470R	E 47UF, 6.3V	1	
C4874	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	ECJ2VB1C104K	C 0.1UF, K, 16V	2	
6				
	ECJ2XB1A105K	C 1UF, K, 10V C 0.1UF, K, 16V	1	
9	ECJ2VB1C104K	C U.10F, K, 16V	2	
C4880	ECJ2XB1A105K	C 1UF, K, 10V	1	
C4882	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4883	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4892	EEVHB0J470R	E 47UF, 6.3V	1	
C4893	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4898	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4899	ECJ1XB0J105K	C 10F, K, 16V	1	
C4901 C4902	EEEHB1C100R ECJ1VB1H103K	C 10PF, J, 16V C 0.001UF, K, 50V	1	
C4902	EEVHB0J470R	E 47UF, 6.3V	1	
C4924	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4925	EEEHB1C470P	C 47PF, J, 16V	1	
C4926	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4929	EEEHB1C100R	C 10PF, J, 16V	1	
C4939	EEVHB0G221P	E 220UF, 4V	1	
C4942	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4943	EEEHB1C470P	C 47PF, J, 16V	1	
C4945-	ECJ1XC1H102J	C 1000PF, J, 50V	4	
48 C4952	ECJ1XC1H101J	C 100PF, J, 50V	1	
C5601	ECA1HM220	E 22UF, 50V	1	
C5604	ECA1HHG100	E 10UF, 50V	1	
C5605	EEUFC1E102	E 1000UF, 25V	1	
C5606	EEUFC1C821	E 820UF, 16V	1	
C5608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5609	ECA1HM220	E 22UF, 50V	1	
C5611	EEUFC1E102	E 1000UF, 25V	1	
C5612	EEUFC1C821	E 820UF, 16V	1	

	T	1		
Ref.	Part No.	Part Name &	Pcs	Remarks
No. C5613	ECJ2XB1E104K	Description C 0.1UF, K, 25V	1	
C5616	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5617	EEUFC1C821	E 820UF, 16V	1	
	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
9				
C5622	EEUFC1C821	E 820UF, 16V	1	
C5623	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5626	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C5631	EEUFC1C102	E 1000UF, 16V	1	
C5637	ECJ2VF1C474Z ECJ2VF1C104Z	C 0.47UF, Z, 16V	1 4	
44	EC32VF1C104Z	C 0.1UF, Z, 16V	*	
C5670	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5672	ECA1HM220	E 22UF, 50V	1	
C5673	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5685	ECA1HHG100	E 10UF, 50V	1	
C5686	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5813	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5818	ECA1CM471	E 470UF, 16V	1	
C5820	ECJ2XB1E104K	E 1000UF, 16V	1	
C5821 C6001-	F2A2D221A022	C 0.1UF, K, 25V E 220UF, 200V	3	
03				
C6005	F1L1E4750004	C 4.7UF, 25V	1	
1 - '	ECA2CM101	E 100UF, 160V	2	
8				
C6009	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6011	F1L2J392A022	C 3900UF, K,6.3V	1	
C6012	F1L2J562A022	C 5600UF, K,6.3V	1	
C6016 C6017	F1L2J392A022 F1L2J562A022	C 3900UF, K,6.3V C 5600UF, K,6.3V	1	
C6021-	ECQE2105RKB	P 1UF, 250V	10	
30		2017 2007	-	
C6031,3	F1L1E4750004	C 4.7UF, 25V	2	
C6034,3	F1L1E4750004	C 4.7UF, 25V	2	
	ECQE2224KF	P 2.2UF, K,250V	1	
	F1L1E4750004	C 4.7UF, 25V	2	
C6046	F1L1E4750004	C 4.7UF, 25V	1	
C6047	F2A2D1510004	E 150UF, 200V	1	
C6048	EEUFC1E221	E 220UF, 25V	1	
C6049	F1L1E4750004	C 4.7UF, 25V	1	
C6050,5 1	TCUY1C105ZFN	C 1UF, 16V	2	
C6053,5	EEUFC1E221	E 220UF, 25V	2	
4				
C6055	ECJ3YB1E105K	C 1UF, K, 25V	1	
	ECJ3YB1E105K EEUFC1A101	C 1UF, K, 25V E 100UF, 10V	1 1	
C6055			_	
C6055 C6056 C6057 C6058	EEUFC1A101 F1L1E4750004 ECJ3YB1E105K	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V	1 1 1	
C6055 C6056 C6057 C6058	EEUFC1A101 F1L1E4750004	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K,6.3V	1	
C6055 C6056 C6057 C6058 C6060,6 1	EEUFC1A101 F1L1E4750004 ECJ3YB1E105K F1K2J471A014 ECA2CM101	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V E 100UF, 160V	1 1 1 2	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457	EEUFC1A101 F1L1E4750004 ECJ3YB1E105K F1K2J471A014 ECA2CM101 ECA2CHG100	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V E 100UF, 160V E 10UF, 160V	1 1 2 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457	EEUFC1A101 F1L1E4750004 ECJ3YB1E105K F1K2J471A014 ECA2CM101 ECA2CHG100 F1L1E4750004	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K,6.3V E 100UF, 160V E 10UF, 160V C 4.7UF, 25V	1 1 2 1 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458	EEUFC1A101 F1L1E4750004 ECJ3YB1E105K F1K2J471A014 ECA2CM101 ECA2CHG100 F1L1E4750004 EEUFC1E470	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V	1 1 2 1 1 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459	EEUFC1A101 F1L1E4750004 ECJ3YB1E105K F1K2J471A014 ECA2CM101 ECA2CHG100 F1L1E4750004 EEUFC1E470 ECA1HM101	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V	1 1 2 1 1 1 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65	EEUFC1A101 F1L1E4750004 ECJ3YB1E105K F1K2J471A014 ECA2CM101 ECA2CHG100 F1L1E4750004 EEUFC1E470 ECA1HM101 F1L1E4750004	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V	1 1 2 1 1 1 1 1 1 4	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466	EEUFC1A101 F1L1E4750004 ECJ3YB1E105K F1K2J471A014 ECA2CM101 ECA2CHG100 F1L1E4750004 EEUFC1E470 ECA1HM101 F1L1E4750004 ECJ2XB1H103K	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V	1 1 1 2 1 1 1 1 1 4	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466 C6467	EEUFC1A101 F1L1E4750004 ECJ3YB1E105K F1K2J471A014 ECA2CM101 ECA2CHG100 F1L1E4750004 EEUFC1E470 ECA1HM101 F1L1E4750004 ECJ2XB1H103K ECJ2XB1H103K	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V  E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V C 4700FF, K, 50V	1 1 1 2 1 1 1 1 1 4	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466 C6467 C6468	EEUFC1A101  F1L1E4750004  ECJ3YB1E105K  F1K2J471A014  ECA2CM101  ECA2CHG100  F1L1E4750004  EEUFC1E470  ECA1HM101  F1L1E4750004  ECJ2XB1H103K  ECJ2XB1H472K  TCUY1C105ZFN	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V  E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V C 4700FF, K, 50V C 1UF, 16V	1 1 1 2 1 1 1 1 1 4	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466 C6467 C6468 C6469	EEUFC1A101  F1L1E4750004  ECJ3YB1E105K  F1K2J471A014  ECA2CM101  ECA2CHG100  F1L1E4750004  EEUFC1E470  ECA1HM101  F1L1E4750004  ECJ2XB1H103K  ECJ2XB1H472K  TCUY1C105ZFN  EEUFC1E221	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V  E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V C 4700PF, K, 50V C 1UF, 16V E 220UF, 25V	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466 C6467 C6468 C6469 C6470	EEUFC1A101  F1L1E4750004  ECJ3YB1E105K  F1K2J471A014  ECA2CM101  ECA2CMG100  F1L1E4750004  EEUFC1E470  ECA1HM101  F1L1E4750004  ECJ2XB1H103K  ECJ2XB1H472K  TCUY1C105ZFN  EEUFC1E221  ECA1HM221	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V  E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V C 4700PF, K, 50V C 1UF, 16V E 220UF, 25V E 220UF, 50V	1 1 1 2 1 1 1 1 1 4 1 1 1 1 1 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466 C6467 C6468 C6469 C6470 C6471	EEUFC1A101  F1L1E4750004  ECJ3YB1E105K  F1K2J471A014  ECA2CM101  ECA2CMG100  F1L1E4750004  EEUFC1E470  ECA1HM101  F1L1E4750004  ECJ2XB1H103K  ECJ2XB1H2X  TCUY1C105ZFN  EEUFC1E221  ECA1HM221  TCUY1C105ZFN	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V  E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V C 4700PF, K, 50V C 1UF, 16V E 220UF, 25V E 220UF, 50V C 1UF, 16V	1 1 1 2 1 1 1 1 1 4 1 1 1 1 1 1 1 1 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466 C6467 C6468 C6469 C6470	EEUFC1A101  F1L1E4750004  ECJ3YB1E105K  F1K2J471A014  ECA2CM101  ECA2CMG100  F1L1E4750004  EEUFC1E470  ECA1HM101  F1L1E4750004  ECJ2XB1H103K  ECJ2XB1H472K  TCUY1C105ZFN  EEUFC1E221  ECA1HM221	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V  E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V C 4700PF, K, 50V C 1UF, 16V E 220UF, 25V E 220UF, 50V	1 1 1 2 1 1 1 1 1 4 1 1 1 1 1 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466 C6467 C6468 C6469 C6470 C6471 C6472	EEUFC1A101  F1L1E4750004  ECJ3YB1E105K  F1K2J471A014  ECA2CM101  ECA2CMG100  F1L1E4750004  EEUFC1E470  ECA1HM101  F1L1E4750004  ECJ2XB1H103K  ECJ2XB1H2X  TCUY1C105ZFN  EEUFC1E221  ECA1HM221  TCUY1C105ZFN  ECJ2VB1H333K	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V  E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V C 4700PF, K, 50V C 1UF, 16V E 220UF, 25V E 220UF, 50V C 1UF, 16V C 0.033UF, K, 50V	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466 C6467 C6468 C6469 C6470 C6471 C6472 C6473	EEUFC1A101  F1L1E4750004  ECJ3YB1E105K  F1K2J471A014  ECA2CM101  ECA2CMG100  F1L1E4750004  EEUFC1E470  ECA1HM101  F1L1E4750004  ECJ2XB1H103K  ECJ2XB1H472K  TCUY1C105ZFN  EEUFC1E221  ECA1HM221  TCUY1C105ZFN  ECJ2VB1H333K  TCUY1C105ZFN	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V  E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V C 4700PF, K, 50V C 1UF, 16V E 220UF, 25V E 220UF, 50V C 1UF, 16V C 0.033UF, K, 50V C 1UF, 16V	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466 C6467 C6468 C6469 C6470 C6471 C6472 C6473 C6474	EEUFC1A101  F1L1E4750004  ECJ3YB1E105K  F1K2J471A014  ECA2CM101  ECA2CMG100  F1L1E4750004  EEUFC1E470  ECA1HM101  F1L1E4750004  ECJ2XB1H103K  ECJ2XB1H472K  TCUY1C105ZFN  EEUFC1E221  ECA1HM221  TCUY1C105ZFN  ECJ2VB1H333K  TCUY1C105ZFN  ECJ2VB1H333K  TCUY1C105ZFN  ECJ2VB1H333K	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V  E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V C 4700PF, K, 50V C 1UF, 16V E 220UF, 25V E 220UF, 50V C 1UF, 16V C 0.033UF, K, 50V C 1UF, 16V C 0.033UF, K, 50V C 1UF, 16V	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466 C6467 C6468 C6467 C6470 C6471 C6472 C6473 C6474 C6475	EEUFC1A101  F1L1E4750004  ECJ3YB1E105K  F1K2J471A014  ECA2CM101  ECA2CMG100  F1L1E4750004  EEUFC1E470  ECA1HM101  F1L1E4750004  ECJ2XB1H103K  ECJ2XB1H472K  TCUY1C105ZFN  ECJ2VB1H333K  TCUY1C105ZFN  ECJ2VB1H333K  TCUY1C105ZFN  ECJ2XB1H103K  ECJ2XB1H103K  ECJ2XB1H333K  TCUY1C105ZFN  ECJ2XB1H103K  EUFC1E221	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V C 4700PF, K, 50V C 1UF, 16V E 220UF, 25V E 220UF, 50V C 1UF, 16V C 0.033UF, K, 50V C 1UF, 16V C 0.033UF, K, 50V C 1UF, 16V C 0.01UF, K, 50V	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C6055 C6056 C6057 C6058 C6060,6 1 C6456 C6457 C6458 C6459 C6461 C6462-65 C6466 C6467 C6468 C6467 C6470 C6471 C6472 C6473 C6474 C6475 C6476	EEUFC1A101  F1L1E4750004  ECJ3YB1E105K  F1K2J471A014  ECA2CM101  ECA2CMG100  F1L1E4750004  EEUFC1E470  ECA1HM101  F1L1E4750004  ECJ2XB1H103K  ECJ2XB1H472K  TCUY1C105ZFN  ECJ2VB1H333K  TCUY1C105ZFN  ECJ2VB1H333K  TCUY1C105ZFN  ECJ2XB1H103K  ECJ2XB1H103K	E 100UF, 10V C 4.7UF, 25V C 1UF, K, 25V C 470UF, K, 6.3V E 100UF, 160V E 10UF, 160V C 4.7UF, 25V E 47UF, 25V E 100UF, 50V C 4.7UF, 25V C 0.01UF, K, 50V C 4700PF, K, 50V C 1UF, 16V E 220UF, 25V E 220UF, 50V C 1UF, 16V C 0.033UF, K, 50V C 1UF, 16V C 0.01UF, K, 50V C 1UF, 16V C 0.033UF, K, 50V C 1UF, 16V C 0.01UF, K, 50V C 1UF, 16V C 0.01UF, K, 50V E 220UF, 25V E 220UF, 25V E 20UF, 25V E 20UF, 25V E 100UF, 160V	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	rare no.	Description	100	Remarks
C6491,9	F2A2G100A017	E 100UF, 400V	2	
2				
	ECJ3XB2J222K	C 2200PF, K,630V	1	
	ECJ2XB1H104K	C 0.1UF, K, 50V	3	
03	EG 70VD1 H10 4V	C 0 1775 77 F077	-	
	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
	ECJ2XB1H104K ECJ2XC1H102J	C 1000PF T 50V	1	
	F1L1E4750004	C 1000PF, J, 50V C 4.7UF, 25V	2	
2	F1E1E4/50004	C 4.70F, 25V		
	ECA2CM101	E 100UF, 160V	1	
	F1L1E4750004	C 4.7UF, 25V	1	
C6523	ECA1VM470	E 47UF, 35V	1	
	F1K2J471A014	C 470UF, K,6.3V	1	
C6526	ECA2EHG220	E 22UF, 250V	1	
C6529,3	F1K2J471A014	C 470UF, K,6.3V	2	
0				
	F1L1E4750004	C 4.7UF, 25V	2	
2				
1	F1K2J471A014	C 470UF, K,6.3V	2	
4 C6541	F1L1E4750004	C 4.7UF, 25V	1	
	F1L1E4750004 F1K2J102A014	C 1000PF,	2	
4	- INZUIUZMU14	C IOUCE,		
C6546	TCUY1C105ZFN	C 1UF, 16V	1	
	ECA2CM101	E 100UF, 160V	1	
	ECQE2224KF	P 2.2UF, K,250V	1	
C6571	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6575	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6577	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6580,8	TCUY1C105ZFN	C 1UF, 16V	2	
1				
C6584	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6585	TCUY1C105ZFN	C 1UF, 16V	1	
C6587	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6588	TCUY1C105ZFN	C 1UF, 16V	1	
C6589	F1L1E4750004	C 4.7UF, 25V	1	
C6590	TCUY1C105ZFN	C 1UF, 16V	1	
C6591	F1L1E4750004	C 4.7UF, 25V	1	
C6598	ECA1CM220	E 22UF, 16V	1	
C6601-	F2A2D221A022	E 220UF, 200V	3	
C6607	ECJ3YB1E105K	C 1UF, K, 25V	1	
	ECA1EM471	E 470UF, 25V	1	
C6611	F1L2J392A022	C 3900UF, K,6.3V	1	
C6612	F1L2J562A022	C 5600UF, K,6.3V	1	
C6615	F1L2J562A022	C 5600UF, K,6.3V	1	
C6616	F1L2J392A022	C 3900UF, K,6.3V	1	
C6617	F1L2J562A022	C 5600UF, K,6.3V	1	
C6621-	ECQE2105RKB	P 1UF, 250V	10	
30		·		
1	F1L1E4750004	C 4.7UF, 25V	2	
2			<u> </u>	
C6634,3	F1L1E4750004	C 4.7UF, 25V	2	
C6637	F1L1E4750004	C 4.7UF, 25V	1	
C6639	F1L1E4750004	C 4.7UF, 25V	1	
C6647	TCUY1C105ZFN	C 1UF, 16V	1	
C6650	ECQE2224KF	P 2.2UF, K,250V	1	
C6651,5	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
2		, , ,		
C6655,5	EEUFC1A101	E 100UF, 10V	2	
6				
1 -	F1K2J471A014	C 470UF, K,6.3V	2	
0	morry1 o1 of and	C 111E 1 CT	_	
C6901-	TCUY1C105ZFN	C 1UF, 16V	4	
	ECJ2XB1H102K	C 1000PF, K, 50V	2	
2			LĪ	
C6917	ECJ2XB1H221K	C 220PF, K, 50V	1	_
C6931	F1L2E1040002	E 1000UF, 25V	1	
C6933	F1L2E1040002	E 1000UF, 25V	1	
C6955-	TCUY1C105ZFN	C 1UF, 16V	4	
58	_			
	ECJ2XB1H102K	C 1000PF, K, 50V	2	
2	E11 2E104000	E 100011E 251	1	
C6977	F1L2E1040002	E 1000UF, 25V	_ +	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	raic no.	Description	103	Kemaiks
C6979		E 1000UF, 25V	1	
C7101	ECJ1XB1C104K	· · · · · · · · · · · · · · · · · · ·	1	
C7104- 06	TCUY1C105ZFN	C 1UF, 16V	3	
C7108- 10	TCUY1C105ZFN	C 1UF, 16V	3	
	ECJ1XB1C104K ECJ1XB1C104K	C 0.1UF, Z, 16V C 0.1UF, Z, 16V	2	
9				
C7153 C7161		C 100PF, J, 50V C 0.47UF, 6.3V	1	
C7161	ECJ3XB2A474K ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7165	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7182	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7186		C 100PF, J, 50V	1	
C7201	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7203-	TCUY1C105ZFN	C 1UF, 16V	4	
06 C7208,0	TCUY1C105ZFN	C 1UF, 16V	2	
9 C7218,1	TCUY1C105ZFN	C 1UF, 16V	2	
9				
C7222	TCUY1C105ZFN	C 1UF, 16V	1	
7			2	
C7235	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7237	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7239	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7242 C7253-	TCUY1C105ZFN	C 10F, 16V	4	
56	ECJ1XC1H101J	C 100PF, J, 50V	4	
C7266	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7268	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7270	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7272	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C9000	EEEHB1C470P	C 47PF, J, 16V	1	
C9001 C9004,0	ECJ1XF1C104Z ECJ1XF1C104Z	C 0.1UF, Z, 16V C 0.1UF, Z, 16V	2	
5 C9006	F1J0J1060004	C 0.010UF, K, 16V	1	
C9007	EEEHB1C470P	C 47PF, J, 16V	1	
C9008	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9009	F1J0J1060004	C 0.010UF, K, 16V	1	
C9010- 12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9013	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9014	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9015- 22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	8	
C9023	EEEHB1C470P	C 47PF, J, 16V	1	
C9024	ECJ1XC1H271J	C 270PF, J, 50V	1	
C9025	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9026,2 7	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C9028- 31	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9033	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9035,3	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9203	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9204	ECJ1VC1H080C	C 8PF, C, 50V	1	
C9205	F1J0J1060004	C 0.010UF, K, 16V	1	
C9206,0 7	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9303	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9304- 57	ECJ1XB1C104K	C 0.1UF, Z, 16V	54	
C9358	EEEHB0G221P	C 220PF, J, 4V	1	
C9359	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9360	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9500	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C9502	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C9503-	ECJ1XB1C104K	C 0.1UF, Z, 16V	10	
12			L	

Ref. No. No. No. Description C9513   RERBICATOP   C 47FF, J, 16V   1 C9514   ECJIXB1C104K   C 0.1UF, Z, 16V   1 C9515   ECHBICATOP   C 47FF, J, 16V   1 C9518   EEHBICATOP   C 47FF, J, 16V   1 C9701, 0 ECJIXCHINIOIK   C 100FF, K, 50V   1 C9701, 0 ECJIXF1C104Z   C 0.1UF, Z, 16V   2 C9703, 0 FIJOJI060004   C 0.010UF, K, 16V   1 C9701, 0 FIJOJI060004   C 0.010UF, K, 16V   1 C9707   EEHBICATOP   C 47FF, J, 16V   1 C9707   EEHBICATOP   C 47FF, J, 16V   1 C9712, 1 FIJOJI060004   C 0.010UF, K, 16V   2 S					
C9913		Part No.		Pcs	Remarks
C9518 EEEBBIC470P C 47PF, J, 16V 1 C9518 EEEBBIC470P C 47PF, J, 16V 1 C9519 CJIXCHIDIR C 100PF, K, 50V 1 C9701.0 ECJIXFEICH012 C 0.1UF, Z, 16V 2 C9703 FIJ0J1060004 C 0.010UF, K, 16V 1 C9705,0 FIJ0J1060004 C 0.010UF, K, 16V 1 C9705,0 FIJ0J1060004 C 0.010UF, K, 16V 2 6 C9707 EEEBBIC470P C 47PF, J, 16V 1 C9712.1 FIJ0J1060004 C 0.010UF, K, 16V 2 C9714.1 ECGRL0G680R C 68PF, J, 4V 2 C9714.2 ECJIXCH1220J C 22PF, J, 50V 1 C9718 ECJIXCH1220J C 22PF, J, 50V 1 C9719.2 ECJIXCH1220J C 1000PF, J, 50V 2 C9719.2 ECJIXCH1220J C 1000PF, J, 50V 2 C9721.2 ECJIXCH1002J C 1000PF, J, 50V 1 C9722 ECJIXCH1002J C 1000PF, J, 50V 1 C9723.2 ECJIXCH1002J C 1000PF, J, 50V 1 C9728.2 ECJIXCH1002J C 1000PF, J, 50V 1 C9733 ECJIXCH1002J C 0.01UF, Z, 16V 2 C9734.3 EEEBBIC470P C 47PF, J, 16V 2 C9734.4 ECJIXEH1004Z C 0.1UF, Z, 16V 1 C9734.3 EERBBIC470P C 4.7UF, Z, 16V 1 C9734.4 ECJIXEH1004Z C 0.01UF, Z, 16V 1 C9735.4 ECRICTOR 1 DE KIKASOAA0003 OP CONNECTOR 1 DE					
17					
C9518	1	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C9519		EEEUD10470D	C 47DE T 1677	-	
C9701,0 ECJIXF1C104Z C 0.1UF, Z, 16V 2 27073 F1J0J1060004 C 0.010UF, K, 16V 1 C9705,0 F1J0J1060004 C 0.010UF, K, 16V 1 C9707 FEREBLCATOP C 47FF, J, 16V 1 C9712,1 F1J0J1060004 C 0.010UF, K, 16V 2 C9711,1 F1J0J1060004 C 0.010UF, K, 16V 2 C9711,1 F1J0J1060004 C 0.010UF, K, 16V 2 C9711,1 ECGRLOGG80R C 68FF, J, 4V 2 C9714,1 ECGRLOGG80R C 68FF, J, 4V 2 C9716 ECJIXC1H220J C 22FF, J, 50V 1 C9718 ECJIXC1H220J C 22FF, J, 50V 1 C9719,2 ECJIXC1H210J C 1000FF, J, 50V 2 0 C9719,2 ECJIXC1H102J C 1000FF, J, 50V 2 C9721,2 ECJIXC1H102J C 1000FF, J, 50V 1 C9722,2 ECJIXC1H102J C 1000FF, J, 50V 1 C9723,2 ECJIXC1H102J C 1000FF, J, 50V 1 C9723,2 ECJIXC1H102J C 1000FF, J, 50V 1 C9723,2 ECJIXC1H102J C 1000FF, J, 50V 1 C9723 ECJIXC1H102J C 0.01UF, Z, 16V 2 9 C9733 ECJIXF1C104Z C 0.01UF, Z, 16V 1 C9733 ECJIXF1C104Z C 0.01UF, Z, 16V 1 C9733 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9733,4 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9741 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9742 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9742 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9743 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9744 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9745 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9746 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9747 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9748 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9749 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9740 ECJIXF1C104Z C 0.01UF, Z, 16V 1 C9741 ECJIXF1C104Z C 0.01UF, Z, 16V 1 C9742 ECJIXF1C104Z C 0.01UF, Z, 16V 1 C9743 ECJIXF1C104Z C 0.00FC C C C C C C C C C C C C C C C C C C				<u> </u>	
2				1	
C9703 F1J0J1060004 C 0.010UF, K, 16V 1 C9705, 0 F1J0J1060004 C 0.010UF, K, 16V 2 C9707 EEEHBLC470P C 47PF, J, 16V 1 C9712, 1 F1J0J1060004 C 0.010UF, K, 16V 2 3 C9714,1 ECGRL0G680R C 68PF, J, 4V 2 C9718, ECGRL0G680R C 68PF, J, 4V 2 C9718 ECJIXC1H220J C 22PF, J, 50V 1 C9719, ECJIXC1H220J C 22PF, J, 50V 1 C9719, ECJIXC1H220J C 1000PF, J, 50V 2 C9719, ECJIXC1H20J C 1000PF, J, 50V 2 C9721, ECJIXC1H20J C 1000PF, J, 50V 2 C9722, ECJIXF1C104Z C 0.1UF, K, 16V 2 C9723, ECJIXC1H102J C 1000PF, J, 50V 1 C9728, ECJIXC1H102J C 1000PF, J, 50V 1 C9728, ECJIXC1H102J C 1000PF, J, 50V 1 C9727 ECJIXC1H102J C 1000PF, J, 50V 1 C9728, ECJIXC1H102J C 1000PF, J, 50V 1 C9728, ECJIXC1H102J C 1000PF, J, 50V 1 C9723 ECJIXC1H102J C 1000PF, J, 50V 1 C9733 EEEHBLC470P C 47PF, J, 16V 2 C9733 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9733, EEEHBLC470P C 47PF, J, 16V 2 S C9736 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9739, ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9734, ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9741 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9742 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9743 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9744 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9743, ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9744 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9743, ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9743, ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9744 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9743, ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9743, ECJIXF1C105Z C 4.7UF, Z, 16V 1 C9744 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9745, ECJIXF1C105Z C 4.7UF, Z, 16V 1 C9746, ECJIXF1C105Z C 4.7UF, Z, 16V 1 C9747, ECJIXF1C105Z C 4.7UF, Z, 16V 1 C9748, ECJIXF1C105Z C 4.7UF, Z, 16V 1 C9749, ECJIXF1C105Z C 4.7UF, Z, 16V 1 C9740, ECJIXF1C105Z C 4.7UF, Z, 16V 1 C9741 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9741 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9742 ECJ1XF1C105Z C 4.7UF, Z, 16V 1 C9744 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9745, ECJIXF1C105Z C 4.7UF, Z, 16V 1 C9740 ECJIXF1C105Z C 4.7UF, Z, 16V 1 C9740 ECJIXF1C105Z C C 4.7UF, Z, 16V 1 C9740 ECJIXF1C105Z C C 4.7UF, Z, 16V 1 C97		ECJIXFICIU4Z	C U.1UF, Z, 16V	2	
C9705,0 F1J0J1060004 C 0.010UF, K, 16V 2 6 6 79707 EEEHBIC470P C 47PF, J, 16V 1 1		F1.T0.T1.060004	C 0 010IIF K 16V	1	
6				<del>                                     </del>	
C9707   EEHBIC470P   C 47PF, J, 16V   1   C9712,1   FJJ0J1060004   C 0.010UF, K, 16V   2   3   C9714,1   EGGRIOG680R   C 68PF, J, 4V   2   C9716   ECJIXC1H220J   C 22PF, J, 50V   1   C9718   ECJIXC1H220J   C 22PF, J, 50V   1   C9718   ECJIXC1H220J   C 1000PF, J, 50V   2   C97919,2   ECJIXC1H220J   C 1000PF, J, 50V   2   C9721,2   ECJIXF1C104Z   C 0.1UF, Z, 16V   2   C9723,2   ECJIXF1C104Z   C 1000PF, J, 50V   1   C9727   ECJIXC1H102J   C 1000PF, J, 50V   1   C9728   ECJIXC1H102J   C 1000PF, J, 50V   1   C9728   ECJIXC1H102J   C 1000PF, J, 50V   1   C9728,2   ECJIXF1C475Z   C 4.7UF, Z, 16V   2   C9730,3   EEEHB1C470P   C 47PF, J, 16V   2   C9733,3   EEEHB1C470P   C 47PF, J, 16V   2   C9733,4   ECJIXF1C104Z   C 0.1UF, Z, 16V   1   C9734,4   ECJIXF1C405Z   C 4.7UF, Z, 16V   2   C9744   ECJIXF1C475Z   C 4.7UF, Z, 16V   1   C9743,4   ECJIXF1C475Z   C 4.7UF, Z, 16V   1   C9900,0   ECJIVF1H03Z   C 0.010UF, Z, 50V   2   C 0.010U		11000100004	C 0.01001, R, 10V	_	
C9712,1 F1J0J1060004 C 0.010UF, K, 16V 2		EEEHB1C470P	C 47PF, J, 16V	1	
3				2	
S	3				
C9716 ECJIXC1B220J C 22PF, J, 50V 1 C9718 ECJIXC1B220J C 22PF, J, 50V 1 C9719, 2 ECJIXC1H102J C 1000PF, J, 50V 2 C9721, 2 ECJIXF1C104Z C 0.1UF, Z, 16V 2 C9723, 2 ECJIXC1H102J C 1000PF, J, 50V 1 C9727 ECJIXC1H102J C 1000PF, J, 50V 1 C9727 ECJIXC1H102J C 1000PF, J, 50V 1 C9728, 2 ECJIXC1H102J C 1000PF, J, 50V 1 C9728, 2 ECJIXC1H102J C 1000PF, J, 50V 1 C9729, 2 ECJIXC1H102J C 1000PF, J, 50V 1 C9730, 3 EEEHB1C470P C 47PF, J, 16V 2 C9731 ECJIXC1H103Z C 0.1UF, Z, 16V 1 C9732 ECJIXP1C104Z C 0.1UF, Z, 16V 1 C9733 ECCIIXP1C104Z C 0.1UF, Z, 16V 1 C9734 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9736 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9737 ECJIXF1C104Z C 0.1UF, Z, 16V 2 C9731 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9734 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9741 ECJIXF1C104Z C 0.1UF, Z, 16V 2 C9741 ECJIXF1C104Z C 0.1UF, Z, 16V 2 C9741 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9743, 4 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9743, 4 ECJIXF1C104Z C 0.1UF, Z, 16V 2 C9743, 6 ECJIXF1C475Z C 4.7UF, Z, 16V 2 C9741 ECJIXF1C475Z C 4.7UF, Z, 16V 1 C9743, 6 ECJIXF1C475Z C 4.7UF, Z, 16V 2 C9741 ECJIXF1C475Z C 1.0UF, Z, 16V 1 C9743, 7 ECJIXF1C475Z C 1.0UF, Z, 16V 2 C9741 ECJIXF1C475Z C 1.0UF, Z, 16V 1 C9743, 8 ECJIXF1C475Z C 1.0UF, Z, 16V 1 C9742 ECJIXF1C475Z C 1.0UF, Z, 16V 1 C9743, 8 ECJIXF1C475Z C 1.0UF, Z, 16V 1 C9744 ECJIXF1C475Z C 1.0UF, Z, 16V 1 C9745 ECJIXF1C475Z C 1.0UF, Z, 16V 1 C9746 ECJIXF1C475Z C 1.0UF, Z, 16V 1 C9747 ECJIXF1C475Z C 1.0UF, Z, 16V 1 C9748 ECJIXF1C475Z C 1.0UF, Z, 16V 1 C9749 ECJIXF1C104Z C 0.0UF, Z, 16V 1 C9740 ECJIXF1C104Z C 0.0UF, Z, 16V 1 C9741 ECJIXF1C475Z C 1.0UF, Z, 16V 1 C9741 ECJIXF1C475Z C 1.0	C9714,1	ECGRL0G680R	C 68PF, J, 4V	2	
C9718	5				
C9719, 2 ECJIXC1H102J C 1000PF, J, 50V 2 C9721, 2 ECJIXF1C104Z C 0.1UF, Z, 16V 2 C9723, 2 ECJZXB1H04K C 0.1UF, K, 50V 2 C9725 ECJIXC1H102J C 1000PF, J, 50V 1 C9726 ECJIXC1H102J C 1000PF, J, 50V 1 C9727 ECJIXC1H102J C 1000PF, J, 50V 1 C9728, 2 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 S	C9716	ECJ1XC1H220J	C 22PF, J, 50V	1	
C9721,2   ECJIXFICIO4Z   C 0.1UF, Z, 16V   2   2   2   2   2   2   2   2   2	C9718	ECJ1XC1H220J	C 22PF, J, 50V	1	
C9721,2 ECJIXF1C104Z C 0.1UF, Z, 16V 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	C9719,2	ECJ1XC1H102J	C 1000PF, J, 50V	2	
2	0				
C9723,2 ECJ2XB1H104K C 0.1UF, K, 50V 2 4 4 C9725 ECJ1XC1H102J C 1000PF, J, 50V 1 C9727 ECJ1XC1H102J C 1000PF, J, 50V 1 C9727 ECJ1XC1H102J C 1000PF, J, 50V 1 C9728,2 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 9 C9730,3 EEEHB1C470P C 47PF, J, 16V 2 1 C9733 ECJ1VF1H103Z C 0.010UF, Z, 50V 1 C9733 ECJ1XF1C104Z C 0.1UF, Z, 16V 1 C9733 ECJ1XF1C104Z C 0.1UF, Z, 16V 1 C9734,3 EEEHB1C470P C 47PF, J, 16V 2 5 C9736 ECJ1XF1C104Z C 0.1UF, Z, 16V 1 C9739,4 ECJ1XF1C104Z C 0.1UF, Z, 16V 2 0 C9741 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9742 ECJ1XF1C104Z C 0.1UF, Z, 16V 1 C9743,4 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9743,4 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 4 C9900,0 ECJ1VF1H103Z C 0.010UF, Z, 50V 2 1 CB1-B7 K1MN68BA0002 68P CONNECTOR 7 D003 MA152K DIODE 1 TH-42PA50A D3 K1KA30A0009 30P CONNECTOR 1 D5 K1KA31A00007 31P CONNECTOR 1 D6 K1KA20A00310 20P CONNECTOR 1 D6 K1KA20A00310 20P CONNECTOR 1 D8 K1KA30A0009 20P CONNECTOR 1 D8 K1KA20A0008 20P CONNECTOR 1 D8 K1KA20A0008 20P CONNECTOR 1 D925 K1KA20AA0008 20P CONNECTOR 1 D25 K1KA20AA0008 20P CONNECTOR 1 D33,34 K1MN55BA0076 55P CONNECTOR 1 D33,34 K1MN55BA0076 55P CONNECTOR 2 D1151 MA8120M ZENER DIODE 1 D1154- MA8062MTX ZENER DIODE 1 D1154- MA8062MTX ZENER DIODE 1 D2104 MA152K DIODE 1 D2116 MA8140M ZENER DIODE 1 D2117 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 MA8140M ZENER DIODE 1 D2110 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D2113 MA8140M ZENER DIODE 1 D2114 MA8140M ZENER DIODE 1 D2115 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2117 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 MA8140M ZENER DIODE 1 D2110 MA111 DIODE 2 6 D2303,0 MA111 DIODE 2 6 D2303,0 MA111 DIODE 2 6 D2315,1 BOJCDD000002 DIODE 2 6 D2315,1 BOJCDD000002 DIODE 2 6 D2332 MA111 DIODE 1	1 - '	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9725   ECJIXCIH102J   C 1000FF, J, 50V	F		0.0.122	<u> </u>	
C9727 ECJIXCIH102J C 1000PF, J, 50V 1 C9728, 2 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 9 C9730,3 EEEHB1C470P C 47PF, J, 16V 2 1 C9732 ECJIVF1H103Z C 0.1UF, Z, 50V 1 C9733 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9734,3 EEEHB1C470P C 47PF, J, 16V 2 5 C9736 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9737 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9739,4 ECJIXF1C104Z C 0.1UF, Z, 16V 2 0 C9741 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9742 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9742 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9743,4 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 4 C9900,0 ECJIVF1H103Z C 0.01UF, Z, 50V 2 1 CEB1-B7 KIMN68BA0002 68P CONNECTOR 7 CB1-B7 KIKA30A0009 30P CONNECTOR 1 D5 K1KA31A00007 31P CONNECTOR 1 D6 K1KA20A00310 20P CONNECTOR 1 D8 K1KA20A00310 20P CONNECTOR 1 D8 K1KA20A0008 20P CONNECTOR 1 D8 K1KA20A0009 20P CONNECTOR 1 D8 K1KA20A0009 20P CONNECTOR 1 D20 K1KA20A0009 20P CONNECTOR 1 D33,34 K1MM55BA0076 55P CONNECTOR 1 D33,34 K1MM55BA0076 55P CONNECTOR 2 D1151 MA8120M ZENER DIODE 1 D1154 MA8120M ZENER DIODE 1 D2101 MA111 DIODE 4 D2111 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D2113 MA8140M ZENER DIODE 1 D2114 MA8140M ZENER DIODE 1 D2115 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2117 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 B0BC01100001 ZENER DIODE 1 D2110 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D2113 MA8140M ZENER DIODE 1 D2114 MA8140M ZENER DIODE 1 D2115 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2117 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 B0BC01100001 ZENER DIODE 1 D2110 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D21303,0 MA111 DIODE 2 G D2303,0 MA111 DIODE 1 D2001 DIODE 2 G D2303 MA111 DIODE 1	C9723,2	ECJ2XB1H104K	C U.1UF, K, 50V	2	
C9727 ECJIXCIH102J C 1000PF, J, 50V 1 C9728, 2 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 9 C9730,3 EEEHB1C470P C 47PF, J, 16V 2 1 C9732 ECJIVF1H103Z C 0.1UF, Z, 50V 1 C9733 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9734,3 EEEHB1C470P C 47PF, J, 16V 2 5 C9736 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9737 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9739,4 ECJIXF1C104Z C 0.1UF, Z, 16V 2 0 C9741 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9742 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9742 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9743,4 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 4 C9900,0 ECJIVF1H103Z C 0.01UF, Z, 50V 2 1 CEB1-B7 KIMN68BA0002 68P CONNECTOR 7 CB1-B7 KIKA30A0009 30P CONNECTOR 1 D5 K1KA31A00007 31P CONNECTOR 1 D6 K1KA20A00310 20P CONNECTOR 1 D8 K1KA20A00310 20P CONNECTOR 1 D8 K1KA20A0008 20P CONNECTOR 1 D8 K1KA20A0009 20P CONNECTOR 1 D8 K1KA20A0009 20P CONNECTOR 1 D20 K1KA20A0009 20P CONNECTOR 1 D33,34 K1MM55BA0076 55P CONNECTOR 1 D33,34 K1MM55BA0076 55P CONNECTOR 2 D1151 MA8120M ZENER DIODE 1 D1154 MA8120M ZENER DIODE 1 D2101 MA111 DIODE 4 D2111 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D2113 MA8140M ZENER DIODE 1 D2114 MA8140M ZENER DIODE 1 D2115 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2117 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 B0BC01100001 ZENER DIODE 1 D2110 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D2113 MA8140M ZENER DIODE 1 D2114 MA8140M ZENER DIODE 1 D2115 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2117 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 B0BC01100001 ZENER DIODE 1 D2110 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D21303,0 MA111 DIODE 2 G D2303,0 MA111 DIODE 1 D2001 DIODE 2 G D2303 MA111 DIODE 1	C9725	EC.T1 VC1 P1 02 T	C 1000PF T 5077	1	
C9728,2 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 9 1 1 C9730,3 EEEHB1C470P C 47PF, J, 16V 2 1 C9731 ECJ1XF1C103Z C 0.010UF, Z, 50V 1 C9734,3 EEEHB1C470P C 47PF, J, 16V 2 5 C9734,3 EEEHB1C470P C 47PF, J, 16V 2 5 C9736 ECJ1XF1C104Z C 0.1UF, Z, 16V 1 C9739,4 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C9739,4 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C9741 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9742 ECJ1XF1C104Z C 0.1UF, Z, 16V 1 C9743,4 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 4 C9900,0 ECJ1VF1H103Z C 0.010UF, Z, 50V 2 1 CB1-B7 K1MN68BA0002 68P CONNECTOR 7 CB1-B7 K1MA68BA0002 68P CONNECTOR 7 D003 MA152K DIODE 1 TH-42PA50A D3 K1KA30A0009 30P CONNECTOR 1 D5 K1KA31A0007 31P CONNECTOR 1 D5 K1KA31A0007 31P CONNECTOR 1 D6 K1KA20A00310 20P CONNECTOR 1 D8 K1KA20A0008 20P CONNECTOR 1 D8 K1KA20A0009 20P CONNECTOR 1 D8 K1KA20A0009 20P CONNECTOR 1 D151 MA8120M ENER DIODE 1 D1151 MA8120M ZENER DIODE 1 D1151 MA8120M ZENER DIODE 1 D201 MA81440M ZENER DIODE 1 D2110 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D2113 MA8140M ZENER DIODE 1 D2114 MA8140M ZENER DIODE 1 D2115 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2117 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 B0EC0110001 ZENER DIODE 1 D2110 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D2113 MA8140M ZENER DIODE 1 D2114 MA8140M ZENER DIODE 1 D2115 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2117 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 B0EC01100010 ZENER DIODE 1 D2110 D2110 MA111 DIODE 2 6 D2333,0 MA111 DIODE 2 6 D2333,0 MA111 DIODE 2 0 D23332 MA111 DIODE 1		t		<del>-</del>	
9 C9730,3 EEEHB1C470P C 47PF, J, 16V 2 1 C9732 ECJIVF1H103Z C 0.010UF, Z, 50V 1 C9733 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9734,3 EEEHB1C470P C 47PF, J, 16V 2 5 C9736 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9739,4 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9739,4 ECJIXB1C104K C 0.1UF, Z, 16V 1 C97342 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9742 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9743,4 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 C9744 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 C9900,0 ECJIVF1H103Z C 0.010UF, Z, 50V 2 1 CB1-B7 K1MN68BA0002 68P CONNECTOR 7 CB1-B7 K1MA68BA0002 68P CONNECTOR 1 DA K1KA30A0009 30P CONNECTOR 1 DA K1KA31A00007 31P CONNECTOR 1 DB K1KA30A0009 20P CONNECTOR 1 DB K1KA30A0009 20P CONNECTOR 1 DB K1KA20A00310 20P CONNECTOR 1 DB K1KA20A0008 20P CONNECTOR 1 DB K1KA20A0008 20P CONNECTOR 1 DB K1KA20A0009 20P CONNECTOR 1 DB K1KA20A00009 20P CONNECTOR 1 DB K1KA20A0009 20P CONNECTOR 1 DB K1KA20A00009 20P CONNECTOR 1 DB K1KA20A0009 20P CONNECTOR 1 DB K1KA20A00009 20P CONNECTOR 1 DB C011-1 MA8120M ZENER DIODE 1 D1151 MA8120M ZENER DIODE 1 D1154 MA8120M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2117 MA8140M ZENER DIODE 1 D2110 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D2113 MA8140M ZENER DIODE 1 D2114 MA8140M ZENER DIODE 1 D2115 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2117 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 B0EC01100001 ZENER DIODE 1 D2119 B0EC01100001 ZENER DIODE 1 D2119 B0EC01100001 ZENER DIODE 1 D2110 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D2113 MA8140M ZENER DIODE 1 D21303,0 MA111 DIODE 2 6 D2315,1 B0JCDD000002 DIODE 2 6 D2332 MA111 DIODE 1				<b>-</b>	
C9730,3   EEEHBIC470P   C 47PF, J, 16V   2   1   1   1   1   1   1   1   1   1		ECJ3XF1C4/5Z	C 4.70F, Z, 16V	2	
C9732   ECJIVFIH103Z   C 0.010UF, Z, 50V   1		EEEHR1C470D	C 47PF .T 16V	2	
C9732 ECJIVFIH103Z C 0.010UF, Z, 50V 1 C9734, 3 EECHBIC470P C 47PF, J, 16V 2 5 C9736 ECJIXFIC104Z C 0.1UF, Z, 16V 1 C9739, 4 ECJIXFIC104Z C 0.1UF, Z, 16V 1 C9739, 4 ECJIXFIC104Z C 0.1UF, Z, 16V 1 C9739, 4 ECJIXFIC104Z C 0.1UF, Z, 16V 1 C9741 ECJ3XFIC475Z C 4.7UF, Z, 16V 1 C9742 ECJIXFIC104Z C 0.1UF, Z, 16V 1 C9743, 4 ECJ3XFIC475Z C 4.7UF, Z, 16V 1 C9743, 4 ECJ3XFIC475Z C 4.7UF, Z, 16V 2 4 C9900, 0 ECJIVFIH103Z C 0.010UF, Z, 50V 2 1 CB1-B7 KIMN68BA0002 68P CONNECTOR 7 CB1-B7 KIKA30A0009 30P CONNECTOR 1 D4 KIKA14A0024B 14P CONNECTOR 1 D5 KIKA31A0007 31P CONNECTOR 1 D6 KIKA20A00310 20P CONNECTOR 1 D8 KIKA30A0009 20P CONNECTOR 1 D8 KIKA30A0009 20P CONNECTOR 1 D8 KIKA20A0008 20P CONNECTOR 1 D33,34 KIMN55BA0076 55P CONNECTOR 1 D33,34 KIMN55BA0076 55P CONNECTOR 2 D1151 MA8120M ZENER DIODE 1 D1154- MA8062MTX ZENER DIODE 1 D2104 MA15ZK DIODE 1 D2107- MA8140M ZENER DIODE 1 D2107- MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D2113 MA8140M ZENER DIODE 1 D2114 MA8140M ZENER DIODE 1 D2115 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2117 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 BOBCOLIOU001 ZENER DIODE 1 D2110 MA815ZK DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA8140M ZENER DIODE 1 D2113 MA8140M ZENER DIODE 1 D2114 MA8140M ZENER DIODE 1 D2115 MA8140M ZENER DIODE 1 D2116 MA815ZK DIODE 1 D2117 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 BOBCOLIOU001 ZENER DIODE 1 D2110 MA15ZK DIODE 1 D2111 MA8140M ZENER DIODE 1 D2112 MA15ZK DIODE 1 D2113 MA8140M ZENER DIODE 1 D2114 MA8140M ZENER DIODE 1 D2115 MA815ZK DIODE 1 D2116 MA815ZK DIODE 1 D2117 DIODE 2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			3,11, 0, 10		
C9733		ECJ1VF1H103Z	C 0.010UF, Z. 50V	1	
C9734,3   EEEHB1C470P   C 47PF, J, 16V   2   5   5   6   6   7   7   7   7   7   7   7   7				<b>—</b>	
S				<del>-</del> -	
C9739,4 ECJIXBIC104K C 0.1UF, Z, 16V 2 0			0 11117 0, 101	-	
C9739,4 ECJIXB1C104K C 0.1UF, Z, 16V 2 0 C9741 ECJ3XF1C475Z C 4.7UF, Z, 16V 1 C9742 ECJIXF1C104Z C 0.1UF, Z, 16V 1 C9743,4 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 4 C9900,0 ECJIVF1H103Z C 0.010UF, Z, 50V 2 1	C9736	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
O	C9739,4	ECJ1XB1C104K		2	
C9742 ECJ1XF1C104Z C 0.1UF, Z, 16V 1 C9743,4 ECJ3XF1C475Z C 4.7UF, Z, 16V 2 4 C9900,0 ECJ1VF1H103Z C 0.010UF, Z, 50V 2 1 CB1-B7 K1MN68BA0002 68P CONNECTOR 7  D003 MA152K DIODE 1 TH-42PA50A D3 K1KA30A0009 30P CONNECTOR 1 D4 K1KA14A00248 14P CONNECTOR 1 D5 K1KA31A00007 31P CONNECTOR 1 D6 K1KA20A00310 20P CONNECTOR 1 D8 K1KA20AA0008 20P CONNECTOR 1 D9 K1KA20AA0008 20P CONNECTOR 1 D20 K1KA20AA0008 20P CONNECTOR 1 D33,34 K1MN55BA0076 55P CONNECTOR 1 D33,34 K1MN55BA0076 55P CONNECTOR 2 D1151 MA8120M ZENER DIODE 1 D1154- MA8062MTX ZENER DIODE 8 61 D2011- MA111 DIODE 4 D2107- MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2111 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 BOBC01100001 ZENER DIODE 1 D2303,0 MA111 DIODE 2 4 D2303,0 MA111 DIODE 2 0 D2315,1 B0JCDD000002 DIODE 2 0 D2332 MA111 DIODE 1			, ,		
C9743,4	C9741	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
A	C9742	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9900,0   ECJ1VF1H103Z   C 0.010UF, Z, 50V   2	C9743,4	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
CB1-B7	4				
CB1-B7 K1MN68BA0002 68P CONNECTOR 7  D003 MA152K DIODE 1 TH-42PA50A  D3 K1KA30AA0009 30P CONNECTOR 1  D4 K1KA14A00248 14P CONNECTOR 1  D5 K1KA31A00007 31P CONNECTOR 1  D6 K1KA20A00310 20P CONNECTOR 1  D8 K1KA08AA0104 8P CONNECTOR 1  D20 K1KA20AA0008 20P CONNECTOR 1  D25 K1KA20AA0008 20P CONNECTOR 1  D25 K1KA20AA0009 20P CONNECTOR 1  D33,34 K1MN55BA0076 55P CONNECTOR 2  D1151 MA8120M ZENER DIODE 1  D1154- MA8062MTX ZENER DIODE 8  61  D2011- MA111 DIODE 4  D2107- MA8140M ZENER DIODE 3  D2107- MA8140M ZENER DIODE 1  D2116 MA8140M ZENER DIODE 1  D2116 MA8140M ZENER DIODE 1  D2118 MA8140M ZENER DIODE 1  D2119 B0BC01100001 ZENER DIODE 1  D2119 B0BC01100001 ZENER DIODE 1  D2303,0 MA111 DIODE 2  0  D2319,2 B0JCDD000002 DIODE 2  0  D2332 MA111 DIODE 1		ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
D003   MA152K   DIODE   1   TH-42PA50A	1				
D003   MA152K   DIODE   1   TH-42PA50A				<u> </u>	
D3	CB1-B7	K1MN68BA0002	68P CONNECTOR	7	
D3				-	
D4 K1KA14A00248 14P CONNECTOR 1 D5 K1KA31A00007 31P CONNECTOR 1 D6 K1KA20A00310 20P CONNECTOR 1 D8 K1KA08AA0104 8P CONNECTOR 1 D20 K1KA20AA0008 20P CONNECTOR 1 D25 K1KA20AA0009 20P CONNECTOR 1 D33,34 K1MN55BA0076 55P CONNECTOR 2 D1151 MA8120M ZENER DIODE 1 D1154- MA8062MTX ZENER DIODE 8 61 D2011- MA111 DIODE 4 D2104 MA152K DIODE 1 D2107- MA8140M ZENER DIODE 3 09 D2111 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 B0BC01100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2130,0 MA111 DIODE 2 4 D2303,0 MA111 DIODE 2 6 D2319,2 B0JCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	D003			1	TH-42PA50A
D5 K1KA31A00007 31P CONNECTOR 1 D6 K1KA20A00310 20P CONNECTOR 1 D8 K1KA08AA0104 8P CONNECTOR 1 D20 K1KA20AA0008 20P CONNECTOR 1 D25 K1KA20AA0009 20P CONNECTOR 1 D33,34 K1MN55BA0076 55P CONNECTOR 2 D1151 MA8120M ZENER DIODE 1 D1154- MA8062MTX ZENER DIODE 8 61 D2011- MA111 DIODE 4 14 D2104 MA152K DIODE 1 D2107- MA8140M ZENER DIODE 3 09 D2111 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 BOBC01100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2330,0 MA111 DIODE 2 4 D23315,1 BOJCDD000002 DIODE 2 0 D2332 MA111 DIODE 1					
D6 K1KA20A00310 20P CONNECTOR 1 D8 K1KA08AA0104 8P CONNECTOR 1 D20 K1KA20AA0008 20P CONNECTOR 1 D25 K1KA20AA0009 20P CONNECTOR 1 D33,34 K1MN55BA0076 55P CONNECTOR 2 D1151 MA8120M ZENER DIODE 1 D1154- MA8062MTX ZENER DIODE 8 61 D2011- MA111 DIODE 4 14 D2104 MA152K DIODE 1 D2107- MA8140M ZENER DIODE 3 09 D2111 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 B0BC01100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2303,0 MA111 DIODE 2 4 D2315,1 B0JCDD000002 DIODE 2 0 D2332 MA111 DIODE 2	D4	K1KA14A00248	14P CONNECTOR	1	
D8	D5	-	31P CONNECTOR	1	
D20	D6	1	20P CONNECTOR	1	
D25 K1KA20AA0009 20P CONNECTOR 1 D33,34 K1MN55BA0076 55P CONNECTOR 2 D1151 MA8120M ZENER DIODE 1 D1154- MA8062MTX ZENER DIODE 8 61 D2011- MA111 DIODE 4 14 D2104 MA152K DIODE 1 D2107- MA8140M ZENER DIODE 3 09 D2111 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 BOBC01100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2303,0 MA111 DIODE 2 4 D2303,0 MA111 DIODE 2 6 D2319,2 BOJCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	D8	K1KA08AA0104	8P CONNECTOR	1	
D33,34	D20	K1KA20AA0008	20P CONNECTOR	1	
D1151   MA8120M   ZENER DIODE   1				1	
D1154-	D33,34	K1MN55BA0076	55P CONNECTOR	2	
61 D2011- D2104 MA111 DIODE D2107- MA8140M ZENER DIODE D2111 MA8140M ZENER DIODE D2111 MA8140M ZENER DIODE D2116 MA8140M ZENER DIODE D2118 MA8140M ZENER DIODE D2119 BOBC01100001 ZENER DIODE D2120 MA152K DIODE D2300,0 MA111 DIODE D2303,0 MA111 DIODE 2 4 D2315,1 BOJCDD000002 DIODE C2 D2319,2 BOJCDD000002 DIODE D2332 MA111 DIODE 1		MA8120M	ZENER DIODE	1	
D2011-	D1154-	MA8062MTX	ZENER DIODE	8	
14 D2104 MA152K DIODE 1 D2107- MA8140M ZENER DIODE 3 09 D2111 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 BOBCO1100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2300,0 MA111 DIODE 2 1 D2303,0 MA111 DIODE 2 4 D2315,1 BOJCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	1	-mioooziiin			I
D2104 MA152K DIODE 1 D2107- MA8140M ZENER DIODE 3 09 D2111 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 BOBC01100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2300,0 MA111 DIODE 2 1 D2303,0 MA111 DIODE 2 4 D2315,1 BOJCDD000002 DIODE 2 0 D2332 MA111 DIODE 1				-	
D2107- MA8140M ZENER DIODE 3 D2111 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 BOBC01100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2300,0 MA111 DIODE 2 1 D2303,0 MA111 DIODE 2 4 D2315,1 BOJCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	D2011-		DIODE	4	
09 D2111 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 B0BC01100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2300,0 MA111 DIODE 2 1 D2303,0 MA111 DIODE 2 4 D2315,1 B0JCDD000002 DIODE 2 6 D2319,2 B0JCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	D2011- 14	MA111			
D2111 MA8140M ZENER DIODE 1 D2116 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 BOBC01100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2300,0 MA111 DIODE 2 1 D2303,0 MA111 DIODE 2 4 D2315,1 BOJCDD000002 DIODE 2 6 D2319,2 BOJCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	D2011- 14 D2104	MA111 MA152K	DIODE	1	
D2116 MA8140M ZENER DIODE 1 D2118 MA8140M ZENER DIODE 1 D2119 BOBCO1100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2300,0 MA111 DIODE 2 1 D2303,0 MA111 DIODE 2 4 D2315,1 BOJCDD000002 DIODE 2 6 D2319,2 BOJCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	D2011- 14 D2104 D2107-	MA111 MA152K	DIODE	1	
D2118 MA8140M ZENER DIODE 1 D2119 B0BC01100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2300,0 MA111 DIODE 2 1 D2303,0 MA111 DIODE 2 4 D2315,1 B0JCDD000002 DIODE 2 6 D2319,2 B0JCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	D2011- 14 D2104 D2107- 09	MA111 MA152K MA8140M	DIODE ZENER DIODE	1 3	
D2119 B0BC01100001 ZENER DIODE 1 D2120 MA152K DIODE 1 D2300,0 MA111 DIODE 2 1 D2303,0 MA111 DIODE 2 4 D2315,1 B0JCDD000002 DIODE 2 6 D2319,2 B0JCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	D2011- 14 D2104 D2107- 09 D2111	MA111 MA152K MA8140M MA8140M	DIODE ZENER DIODE ZENER DIODE	1 3	
D2120 MA152K DIODE 1 D2300,0 MA111 DIODE 2 1 D2303,0 MA111 DIODE 2 4 D2315,1 B0JCDD000002 DIODE 2 6 D2319,2 B0JCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	D2011- 14 D2104 D2107- 09 D2111 D2116	MA111 MA152K MA8140M MA8140M MA8140M	DIODE ZENER DIODE ZENER DIODE ZENER DIODE	1 3	
D2300,0 MA111 DIODE 2  1 D2303,0 MA111 DIODE 2 4 D2315,1 B0JCDD0000002 DIODE 2 6 D2319,2 B0JCDD0000002 DIODE 2 0 D2332 MA111 DIODE 1	D2011- 14 D2104 D2107- 09 D2111 D2116 D2118	MA111 MA152K MA8140M MA8140M MA8140M MA8140M	DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE	1 3 1 1	
1 D2303,0 MA111 DIODE 2 4 D2315,1 B0JCDD000002 DIODE 2 6 D2319,2 B0JCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	D2011- 14 D2104 D2107- 09 D2111 D2116 D2118 D2119	MA111 MA152K MA8140M MA8140M MA8140M MA8140M BOBC01100001	DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE	1 3 1 1 1	
D2303,0 MA111 DIODE 2 4 D2315,1 B0JCDD000002 DIODE 2 6 D2319,2 B0JCDD000002 DIODE 2 0 D2332 MA111 DIODE 1	D2011- 14 D2104 D2107- 09 D2111 D2116 D2118 D2119	MA111 MA152K MA8140M MA8140M MA8140M MA8140M MA8140M BOBC01100001 MA152K	DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE DIODE	1 3 1 1 1 1 1	
4 D2315,1 B0JCDD000002 DIODE 2 C C C C C C C C C C C C C C C C C C	D2011- 14 D2104 D2107- 09 D2111 D2116 D2118 D2119 D2120 D2300,0	MA111 MA152K MA8140M MA8140M MA8140M MA8140M MA8140M BOBC01100001 MA152K	DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE DIODE	1 3 1 1 1 1 1	
6 D2319,2 B0JCDD000002 DIODE 2 DIODE 1 DIODE 1	D2011- 14 D2104 D2107- 09 D2111 D2116 D2118 D2119 D2120 D2300,0 1	MA111 MA152K MA8140M MA8140M MA8140M MA8140M BOBC01100001 MA152K MA111	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  DIODE  DIODE	1 3 1 1 1 1 1 2	
6 D2319,2 B0JCDD000002 DIODE 2 DIODE 1 DIODE 1	D2011- 14 D2104 D2107- 09 D2111 D2116 D2118 D2119 D2120 D2300,0 1	MA111 MA152K MA8140M MA8140M MA8140M MA8140M BOBC01100001 MA152K MA111	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  DIODE  DIODE	1 3 1 1 1 1 1 2	
0 D2332 MA111 DIODE 1	D2011- 14 D2104 D2107- 09 D2111 D2116 D2118 D2119 D2120 D2300,0 1 D2303,0 4	MA111  MA152K  MA8140M  MA8140M  MA8140M  MA8140M  MA81410M  MA111  MA111	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  DIODE  DIODE  DIODE	1 3 1 1 1 1 1 2	
D2332 MA111 DIODE 1	D2011- 14 D2104 D2107- 09 D2111 D2116 D2118 D2119 D2120 D2300,0 1 D2303,0 4 D2315,1	MA111  MA152K  MA8140M  MA8140M  MA8140M  MA8140M  MA81410M  MA111  MA111	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  DIODE  DIODE  DIODE	1 3 1 1 1 1 1 2	
	D2011- 14 D2104 D2107- 09 D2111 D2116 D2118 D2119 D2300,0 1 D2303,0 4 D2315,1 6	MA111  MA152K  MA8140M  MA8140M  MA8140M  MA8140M  MA81410M  BOBC01100001  MA152K  MA111  MA111  BOJCDD000002	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  DIODE  DIODE  DIODE  DIODE  DIODE	1 3 1 1 1 1 1 2 2	
D2512 MA8056M ZENER DIODE 1	D2011- 14 D2104 D2107- 09 D2111 D2116 D2118 D2119 D2120 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2	MA111  MA152K  MA8140M  MA8140M  MA8140M  MA8140M  MA81410M  BOBCO1100001  MA152K  MA111  MA111  BOJCDD000002  BOJCDD000002	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  DIODE  DIODE  DIODE  DIODE  DIODE	1 3 1 1 1 1 1 2 2	
	D2011- 14 D2104 D2107- 09 D2111 D2116 D2118 D2119 D2120 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2	MA111  MA152K  MA8140M  MA8140M  MA8140M  MA8140M  MA81410M  BOBCO1100001  MA152K  MA111  MA111  BOJCDD000002  BOJCDD000002	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  DIODE  DIODE  DIODE  DIODE  DIODE	1 3 1 1 1 1 1 2 2	

Ref.	Part No.	Part Name &	Pcs	Remarks
No. D2513,1	MA152K	Description DIODE	2	
4		51052	ļ-	
D2520	B3AAA0000770	LED	1	
D2523 D2524	MA152K MA8056M	DIODE ZENER DIODE	1	
D2529	MA8056-M	ZENER DIODE	1	
D3003	MA8140M	ZENER DIODE	1	
D3005,0	MA8140M	ZENER DIODE	2	
D3017	MA8140M	ZENER DIODE	1	
D3021	MA152	DIODE	1	
D3023	MA111	DIODE	1	
D3024 D3026	B0BC01100001 MA111	ZENER DIODE DIODE	1	
D3020	MA8140M	ZENER DIODE	11	
44			1	
D3100 D3237,3	MA8140M MA152K	ZENER DIODE DIODE	2	TH-42PA50H/M
D4231	MA111	DIODE	1	
D5610	MA3X78900L	ZENER DIODE	1	
D5614	B0BC6R600005	ZENER DIODE	1	
D5615	B0BC4R700007	ZENER DIODE	1	
D5616	B0BC6R600005	ZENER DIODE	1	
D5617	B0BC01100001	ZENER DIODE	1	
D5618 D5637,3	B0BC03900015 MA152	ZENER DIODE DIODE	2	
8	MAISZ	DIODE		
D5639	MA3047H	ZENER DIODE	1	
D5640	MA3068H	ZENER DIODE	1	
D5641 D5642	MA152 MA3100H	DIODE ZENER DIODE	1	
D5643	MA152	DIODE	1	
D5644	MA3068M	ZENER DIODE	1	
D5645-	MA152	DIODE	3	
47 D6001,0	B0HBSN000008	DIODE	2	
2			+_	
D6015 D6020		DIODE	1	
D6021	B0ECHP000003	DIODE	1	
D6022	B0HBSN000008	DIODE	1	
D6023	B0ECHP000003	DIODE	1	
D6024	B0HBSN000008	DIODE	1	
D6029	B0HBSN000008	DIODE	1	
D6035	MA8033L	ZENER DIODE	1	
D6036 D6040,4	MA111 B0ECHP000003	DIODE	2	
D6051	ВОЕСНЬОООООЗ	DIODE	1	
D6051 D6052,5	B0ECHP000003 B0JCME000037	DIODE	2	
D6054	B0ECHP000003	DIODE	1	
D6055	B0JCME000037	DIODE	1	
D6057	В0ЕСНР000003	DIODE	1	
D6058- 60	MA111	DIODE	3	
D6061	MA8082MTX	ZENER DIODE	1	
D6062	MA111	DIODE	1	
D6063	MA8051L	ZENER DIODE	1	
D6064 D6065	MA111 LNJ301MPUJA	LED	1	
D6065,6	MA8330M	ZENER DIODE	2	
D6070	MA111	DIODE	1	
D6451	B0JCME000037	DIODE	1	
D6452,5	MA111	DIODE	2	
D6455	MA111	DIODE	1	
D6456	B0ECHP000003	DIODE	1	
D6459	MA111	DIODE	1	
D6460,6 1	вонскѕооооо2	DIODE	2	
D6462	војсме000037	DIODE	1	
D6463	MA8056H	ZENER DIODE	1	
D6464	B0JCME000037	DIODE	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
D6465,6	MA8330M	ZENER DIODE	2	
D6467	B0ECHP000003	DIODE	1	
D6468	MA111	DIODE	1	
D6470,7 1	MA111	DIODE	2	
D6473	MA111	DIODE	1	
D6475	MA111	DIODE	1	
D6476	B0ECHP000003	<u> </u>	1	
D6477	MA111	DIODE	1	
D6478 D6479	B0HCKS000002 MA111	DIODE	1	
	MA8330M	ZENER DIODE	2	
D6483- 90	ма8056н	ZENER DIODE	8	
D6491,9 2	воеснроооооз	DIODE	2	
D6495	B0HCKS000002	DIODE	1	
D6496	В0ЈСМЕ000037	DIODE	1	
D6501,0 2	MA111	DIODE	2	
D6503	ма8056н	ZENER DIODE	1	
D6509	MA111	DIODE	1	
D6511	B0HCMM000014	DIODE	1	
D6512- 14	MA111	DIODE	3	
D6515	MA8240M	ZENER DIODE	1	
D6516 D6519	MA111 MA111	DIODE	1	
D6519	B0JCKG000002	DIODE	1	
D6521	B0ECHP000003	DIODE	1	
D6522	MA111	DIODE	1	
D6523	воеснроооооз	DIODE	1	
D6524	MA8051L	ZENER DIODE	1	
D6525	MA111	DIODE	1	
D6526	B0HCMM000014	DIODE	1	
D6527	MA111	DIODE	1	
D6529 D6541	B0JCME000037 B0HCKS000002	DIODE	1	
D6542	MA111	DIODE	1	
D6543	B0HCKS000002	DIODE	1	
D6544	MA111	DIODE	1	
D6545	MA8051L	ZENER DIODE	1	
D6546- 48	MA8330M	ZENER DIODE	3	
D6549,5 0	MA111	DIODE	2	
D6551	B0JCME000037	DIODE	1	
D6552,5	MA111	DIODE	2	
D6554	B0HCKS000002	DIODE	1	
D6570 D6572	B0HCMM000014 B0ECHP000003	DIODE	1	
D6582	MA8051L	DIODE ZENER DIODE	1	
D6583	LNJ301MPUJA	LED	1	
D6584	MA111	DIODE	1	
D6585,8 6	MA8330M	ZENER DIODE	2	
D6601,0 2	B0HBSN000008	DIODE	2	
D6615	В0ЕСНР000003	DIODE	1	
D6620	BOHBSN000008	DIODE	1	
D6621	BOECHPOOOOO3	DIODE	1	
D6622 D6623	B0HBSN000008 B0ECHP000003	DIODE	1	
D6624	B0HBSN000008	DIODE	1	
D6629	B0HBSN000008	DIODE	1	
D6635	MA8033L	ZENER DIODE	1	
D6636	MA111	DIODE	1	
D6640	B0ECHP000003	DIODE	1	
D6647	B0ECHP000003	DIODE	1	
D6901- 03	ма8056н	ZENER DIODE	3	
D6905	B0ECHP000003	DIODE	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No. D6909,1	B0ECHP000003	Description DIODE	2	
0 D6956,5	MA8056H	ZENER DIODE	2	
7 D6961,6	B0ECHP000003	DIODE	2	
D9000-	MA3033	ZENER DIODE	3	
D9011,1	MA728	DIODE	2	
D9015,1 6	MA152K	DIODE	2	
D9700,0	MA728	DIODE	2	
D9900,0	MA152K	DIODE	2	
DG2	K1MN40A00024	40P CONNECTOR	1	
DG3	K1KA20B00155	20P CONNECTOR	1	
DG5	K1KA21B00008	21P CONNECTOR	1	
DG20	K1MN30A00068	30P CONNECTOR	1	
DG32	K1KA08AA0150	8P CONNECTOR	1	
FL1100	J0HABH000012	LC FILTER	1	
FL4016,	Ј0НАВН000012	LC FILTER	2	
FL4020- 23	Ј0НАВН000012	LC FILTER	4	
FL7106	Ј0НАВН000013	LC FILTER	1	
FL7208	Ј0НАВН000013	LC FILTER	1	
FL9000-	Ј0НАВН000013	LC FILTER	5	
FL9300- 02	ЈОНАВНОООО13	LC FILTER	3	
FL9701,	Ј0НАВН000012	LC FILTER	2	
FL9703, 04	Ј0НАВН000013	LC FILTER	2	
FL9900,	J0HABH000013	LC FILTER	2	
01				
			+	
н2	K1MN40B00045	40P CONNECTOR	1	
н2 н5	K1KA15AA0288	15P CONNECTOR	1	
н2 н5 н6	K1KA15AA0288 K1KA09A00230	15P CONNECTOR 9P CONNECTOR	1	TH-42PA50A
H2 H5 H6	K1KA15AA0288 K1KA09A00230 K1KA15AA0288	15P CONNECTOR 9P CONNECTOR 15P CONNECTOR	1 1 1	TH-42PA50A TH-42PA50H/M
H2 H5 H6 H6A	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR	1 1 1 1	
H2 H5 H6 H6A H12	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR	1 1 1 1 1	
H2 H5 H6 H6A H12 H15 H30	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068	15P CONNECTOR 9P CONNECTOR 15P CONNECTOR 9P CONNECTOR 4P CONNECTOR 30P CONNECTOR	1 1 1 1 1 1	
H2 H5 H6 H6A H12 H15 H30	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013	15P CONNECTOR 9P CONNECTOR 15P CONNECTOR 9P CONNECTOR 4P CONNECTOR 30P CONNECTOR 35P CONNECTOR	1 1 1 1 1 1	
H2 H5 H6 H6A H12 H15 H30	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068	15P CONNECTOR 9P CONNECTOR 15P CONNECTOR 9P CONNECTOR 4P CONNECTOR 30P CONNECTOR	1 1 1 1 1 1	
H2 H5 H6 H6A H12 H15 H30	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013	15P CONNECTOR 9P CONNECTOR 15P CONNECTOR 9P CONNECTOR 4P CONNECTOR 30P CONNECTOR 35P CONNECTOR	1 1 1 1 1 1	
H2 H5 H6 H6A H12 H15 H30 H50 H53	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178 TMM25401	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  35P CONNECTOR	1 1 1 1 1 1 1	
H2 H5 H6 H6A H12 H15 H30 H50	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  35P CONNECTOR  12P CONNECTOR	1 1 1 1 1 1 1 1 1	
H2 H5 H6 H6A H12 H15 H30 H50 H53	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178 TMM25401 CODBEZG00013	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  35P CONNECTOR  12P CONNECTOR  CLAMPER	1 1 1 1 1 1 1 1 1 4	
H2 H5 H6 H6A H12 H15 H30 H50 H53 HMM1-M4	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178 TMM25401 CODBEZG00013 C2CBYF000032	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  35P CONNECTOR  12P CONNECTOR  CLAMPER  IC	1 1 1 1 1 1 1 1 4	
H2 H5 H6 H6A H12 H15 H30 H50 H53 HMM1-M4 IC1103 IC1104 IC1106	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178 TMM25401 CODBEZG00013 C2CBYF000032 CXA1875AM	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  12I CONNECTOR  IC LINEAR IC	1 1 1 1 1 1 1 1 4	TH-42PA50H/M
H2 H5 H6 H6A H12 H15 H30 H50 H53 HMM1-M4 IC1103 IC1104 IC1106 IC1107	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178 TMM25401 CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  12I CONNECTOR  IC  LINEAR IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	ТН-42РА50Н/М
H2 H5 H6 H6A H12 H15 H30 H50 H53 HMM1-M4 IC1103 IC1104 IC1106 IC1107 IC1107	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C IC  IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53 HMM1-M4 IC1103 IC1104 IC1106 IC1107 IC1107	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C IC  IC IC  IC IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53 HMM1-M4 IC1103 IC1104 IC1106 IC1107 IC1107 IC1107	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C IC IC IC IC IC IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53 HMM1-M4 IC1103 IC1104 IC1106 IC1107 IC1107 IC1107 IC1107	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  35P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53 HMM1-M4 IC1103 IC1104 IC1106 IC1107 IC1107 IC1107 IC1108 IC1109 IC1110	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281 C0CBCBD00043	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  12IC  LINEAR IC  IC  IC  IC  IC  IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53 HMM1-M4 IC1103 IC1104 IC1106 IC1107 IC1107 IC1107 IC1108 IC1109 IC1110	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281 C0CBCBD00043 C3ABPG000133	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  35P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53 HMM1-M4 IC1103 IC1104 IC1107 IC1107 IC1107 IC1108 IC1109 IC1110 IC1114 IC1115	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09A00190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281 C0CBCBD00043 C3ABPG000133 TVRN603-1	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C  IC  IC  IC  IC  IC  IC  IC  IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53 HMM1-M4 IC1103 IC1104 IC1107 IC1107 IC1107 IC1108 IC1109 IC1110 IC1114 IC1115 IC1117	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09A00190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281 C0CBCBD00043 C3ABPG000133 TVRN603-1 C0JBAZ002186	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C  IC  IC  IC  IC  IC  IC  IC  IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53  HMM1-M4 IC1103 IC1104 IC1107 IC1107 IC1107 IC1108 IC1109 IC1110 IC1114 IC1115 IC1117 IC1235	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09A00190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281 C0CBCBD00043 C3ABPG000133 TVRN603-1 C0JBAZ002186 C0ZBZ0001038	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C  IC  IC  IC  IC  IC  IC  IC  IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53  HMM1-M4 IC1103 IC1104 IC1107 IC1107 IC1107 IC1107 IC1108 IC1109 IC1110 IC1114 IC1115 IC1117 IC1235 IC2103	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09A00190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281 C0CBCBD00043 C3ABPG000133 TVRN603-1 C0JBAZ002186 C0ZBZ0001038 AN77L08M	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C  IC  IC  IC  IC  IC  IC  IC  IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53  HMM1-M4  IC1103 IC1104 IC1107 IC1107 IC1107 IC1108 IC1110 IC1114 IC1115 IC1117 IC1235 IC2103 IC2104	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09A00190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281 C0CBCBD00043 C3ABPG000133 TVRN603-1 C0JBAZ002186 C0ZBZ0001038 AN77L08M C0ABBB000038	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C  IC  IC  IC  IC  IC  IC  IC  IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53  HMM1-M4  IC1103 IC1104 IC1107 IC1107 IC1107 IC1108 IC1109 IC1110 IC1114 IC1115 IC1117 IC1235 IC2103 IC2104 IC2105	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09AA0190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281 C0CBCBD00043 C3ABPG000133 TVRN603-1 C0JBAZ002186 C0ZBZ0001038 AN77L08M C0ABBB000038 AN15861A-VT	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C  IC  IC  IC  IC  IC  IC  IC  IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53  HMM1-M4  IC1103 IC1104 IC1107 IC1107 IC1107 IC1107 IC1108 IC1114 IC1115 IC1117 IC1235 IC2103 IC2104 IC2105 IC2106	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09A00190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ0002181 C0CBCBD00043 C3ABPG000133 TVRN603-1 C0JBAZ002186 C0ZBZ0001038 AN77L08M C0ABBB000038 AN15861A-VT C1AB00002135	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C  IC  IC  IC  IC  IC  IC  IC  IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53  HMM1-M4  IC1103 IC1104 IC1107 IC1107 IC1107 IC1108 IC1110 IC1114 IC1115 IC1117 IC1235 IC2103 IC2104 IC2105 IC2106 IC2107	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09A00190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281 C0CBCBD00043 C3ABPG000133 TVRN603-1 C0JBAZ002186 C0ZBZ0001038 AN77L08M C0ABBB000038 AN15861A-VT C1AB00002135 CODBEZE00006	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53  HMM1-M4  IC1103 IC1104 IC1106 IC1107 IC1107 IC1107 IC1108 IC1114 IC1115 IC1117 IC1235 IC2103 IC2104 IC2105 IC2106 IC2107 IC2108	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09A00190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281 C0CBCBD00043 C3ABPG000133 TVRN603-1 C0JBAZ002186 C0ZBZ0001038 AN77L08M C0ABBB000038 AN15861A-VT C1AB00002135 CODBEZE00006 C0EBF0000354	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A
H2 H5 H6 H6A H12 H15 H30 H50 H53  HMM1-M4  IC1103 IC1104 IC1107 IC1107 IC1107 IC1107 IC1107 IC1107 IC11108 IC1114 IC1115 IC1117 IC1235 IC2103 IC2104 IC2105 IC2106 IC2107 IC2108 IC2300	K1KA15AA0288 K1KA09A00230 K1KA15AA0288 K1KA09A00190 K1KA04AA0150 K1MN30A00068 K1MN35A00013 K1KA12AA0178  TMM25401  CODBEZG00013 C2CBYF000032 CXA1875AM TVRN610 TVRN611 TVRN776 C0EBE0000336 C0JBBZ000281 C0CBCBD00043 C3ABPG000133 TVRN603-1 C0JBAZ002186 C0ZBZ0001038 AN77L08M C0ABBB000038 AN15861A-VT C1AB00002135 C0DBEZE00006 C0EBF0000354 C1BB00000800	15P CONNECTOR  9P CONNECTOR  15P CONNECTOR  9P CONNECTOR  4P CONNECTOR  30P CONNECTOR  12P CONNECTOR  12P CONNECTOR  1C	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50H/M TH-42PA50H TH-42PA50A

	I	I	_	
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC3005	AN15866A-VT	IC	1	
IC3005	CXA1315M	LINEAR IC	1	
IC4005	C1AB00002298	IC	1	
IC4008	C0CBCBD00008	IC	1	
IC4008	C0CBCAC00282	IC	1	
IC4011	C0CBCAC00282	IC	1	
IC4012	C1AB00001834	IC	1	
IC4013	C1AB00002202	IC	1	
IC4014	C0JBAZ002186			
IC4016	C0FBBD000195 C0JBAP000020	IC	1	
IC4021		IC	1	
IC4024	C0DBZFG00055	IC	1	
IC4025	COCBCACO0275	IC	1	
IC4041	COCBCACO0275	IC	1	
IC4042	CODBEJG00001	IC	1	
IC4044	COCBCACO0136	IC	1	
IC4048	C0DBEJG00001	IC	1	
IC4049	C0CBCBF00009	IC	1	
IC4051	C1ZBZ0002790	IC	1	
IC4054	C1AB00002234	IC	1	
IC4055	C3ABQJ000040	IC	1	
IC4063	C0EBC0000150	IC	1	
IC5601,	NOBF2DE00001	DC-DC CONVERTER	2	
02	G0DD7 700000	T.O.	-	
IC5603	CODBAJBOOOO4	IC	1	
IC5803	C0DAEZH00017	IC	1	
IC6001-	C0ZBZ0000895	IC	3	
03	G07770001000		-	
IC6004	C0ZBZ0001033	IC CONTROL OFFICE	1	
IC6005	NJM2903M	INTEGRATED CIRCUIT	1	
IC6006	C0JBAZ000005	IC	1	
IC6011	AN1431M	LINEAR IC	1	
IC6451	AN1431M	LINEAR IC	1	
IC6452,	C0CBALC00010	IC	2	
53	G0GD3DG0007E	TO	_	
IC6454,	C0CBADC00075	IC	2	
IC6456	AN1431M	LINEAR IC	1	
	AN1431M	LINEAR IC	2	
1004/1,	MILITA	DINEAR IC	_	
72				
<b>—</b>	AN1431M	LINEAR IC	1	
IC6491	AN1431M COJBAZ000994	_	1 2	
<b>—</b>	AN1431M COJBAZ000994	LINEAR IC		
IC6491 IC6501,		_		
IC6491 IC6501, 02	C0JBAZ000994	IC	2	
IC6491 IC6501, 02 IC6511	C0JBAZ000994 C0ZBZ0001033	IC IC	2	
IC6491 IC6501, 02 IC6511 IC6512 IC6521	C0JBAZ000994 C0ZBZ0001033 C0CBADC00075 C0ZBZ0001033	IC IC	2 1 1	
IC6491 IC6501, 02 IC6511 IC6512	C0JBAZ000994 C0ZBZ0001033 C0CBADC00075	IC IC	2 1 1	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541,	C0JBAZ000994 C0ZBZ0001033 C0CBADC00075 C0ZBZ0001033	IC IC	2 1 1	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42	COJBAZ000994  COZBZ0001033  COCBADC00075  COZBZ0001033  COZBZ0001033	IC IC IC IC	2 1 1 1 2	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543	COJBAZ000994  COZBZ0001033  COCBADC00075  COZBZ0001033  COZBZ0001033  COCBADC00075	IC IC IC IC	1 1 1 2	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581	COJBAZ000994  COZBZ0001033  COCBADC00075  COZBZ0001033  COZBZ0001033  COCBADC00075  NJM2903M	IC IC IC IC IC IC IC IC IC	1 1 1 2 1 1	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6601, 02	COJBAZ000994  COZBZ0001033  COCBADC00075  COZBZ0001033  COZBZ0001033  COCBADC00075  NJM2903M	IC IC IC IC IC IC IC IC IC	1 1 1 2 1 1	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6601, 02 IC6605, 06	COJBAZ000994  COZBZ0001033  COCBADC00075  COZBZ0001033  COZBZ0001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ000005	IC INTEGRATED CIRCUIT IC	1 1 1 2 1 1 2	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6601, 02 IC6605, 06	COJBAZ000994  COZBZ0001033  COCBADC00075  COZBZ0001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ00005  COJBAA000174	IC	2 1 1 2 1 1 2 2	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6601, 02 IC6605, 06 IC6607 IC6901-	COJBAZ000994  COZBZ0001033  COCBADC00075  COZBZ0001033  COZBZ0001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ000005	IC I	1 1 1 2 1 1 2	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6601, 02 IC6605, 06 IC6607 IC6901- 04	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZ0001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ000005  COJBAA000174  AN16021A-VT	IC INTEGRATED CIRCUIT IC IC IC	2 1 1 2 1 2 2 2 1 4	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6601, 02 IC6605, 06 IC6607 IC6901- 04	COJBAZ000994  COZBZ0001033  COCBADC00075  COZBZ0001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ00005  COJBAA000174	IC INTEGRATED CIRCUIT IC IC	2 1 1 2 1 1 2 2	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC6955- 58	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ000005  COJBAA000174  AN16021A-VT	IC IC IC IC IC IC IC IC IC IT INTEGRATED CIRCUIT IC IC IC IC	2 1 1 1 2 1 1 2 2 2 1 4	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC6955- 58	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COZBZO001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ000005  COJBAZ000174  AN16021A-VT  AN16021A-VT  COJBAZ001120	IC IC IC IC IC IC IC IC IC IT INTEGRATED CIRCUIT IC IC IC IC	1 1 1 2 1 1 2 2 2 1 4 4	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC6955- 58 IC7101 IC7104-	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ000005  COJBAA000174  AN16021A-VT	IC IC IC IC IC IC IC IC IC IT INTEGRATED CIRCUIT IC IC IC IC	2 1 1 1 2 1 1 2 2 2 1 4	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC6955- 58 IC7101 IC7104- 06	COJBAZ000994  COZBZ0001033  COCBADC00075  COZBZ0001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ00005  COJBAZ00174  AN16021A-VT  AN16021A-VT  COJBAZ001120  COJBAZ001120	IC I	2 1 1 1 2 1 2 2 2 1 4 4	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC6955- 58 IC7101 IC7104-	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COZBZO001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ000005  COJBAZ000174  AN16021A-VT  AN16021A-VT  COJBAZ001120	IC IC IC IC IC IC IC IC IC IT INTEGRATED CIRCUIT IC IC IC IC	1 1 1 2 1 1 2 2 2 1 4 4	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC6955- 58 IC7101 IC7104- 06	COJBAZ000994  COZBZ0001033  COCBADC00075  COZBZ0001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ00005  COJBAZ00174  AN16021A-VT  AN16021A-VT  COJBAZ001120  COJBAZ001120	IC I	2 1 1 1 2 1 2 2 2 1 4 4	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6605, 06 IC6607 IC6901- 04 IC6955- 58 IC7101 IC7104- 06 IC7201- 04 IC9001	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COCBADC00075  NJM2903M  COZBZO0000895  COJBAZO00005  COJBAZO0174  AN16021A-VT  COJBAZO01120  COJBAZO01120  COJBAZO01120  COJBAZO01120	IC I	2 1 1 1 2 1 1 2 2 2 1 4 4 4 1 3	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6605, 06 IC6607 IC6901- 04 IC7101 IC7104- 06 IC7201- 04 IC9001 IC9001	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COCBADC00075  NJM2903M  COZBZO0000895  COJBAZO00005  COJBAZO0174  AN16021A-VT  COJBAZO01120  COJBAZO01120  COJBAZO01120  TVRN460-1  C2CBJG000660	IC I	2 1 1 1 2 2 2 2 1 4 4 4 1 1 3	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6601, 02 IC6607 IC6901- 04 IC6955- 58 IC7101 IC7104- 06 IC7201- 04 IC9001 IC9003 IC9004	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COCBADC00075  NJM2903M  COZBZO000895  COJBAZO0005  COJBAZO0174  AN16021A-VT  AN16021A-VT  COJBAZO01120  COJBAZO01120  COJBAZO01120  TVRN460-1  C2CBJG000660  C0EBE0000120	IC I	2 1 1 1 2 1 1 2 2 2 1 4 4 4 1 3	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6541, 42 IC6543 IC6581 IC6605, 06 IC6607 IC6901- 04 IC7101 IC7104- 06 IC7201- 04 IC9001 IC9001	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COCBADC00075  NJM2903M  COZBZO0000895  COJBAZO00005  COJBAZO0174  AN16021A-VT  COJBAZO01120  COJBAZO01120  COJBAZO01120  TVRN460-1  C2CBJG000660	IC I	2 1 1 1 2 2 1 1 2 2 1 4 4 4 1 1 3	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6543 IC6543 IC6581 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC6955- 58 IC7101 IC7104- 06 IC7201- 04 IC9001 IC9003 IC9004 IC9005,	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COCBADC00075  NJM2903M  COZBZO000895  COJBAZO0005  COJBAZO0174  AN16021A-VT  AN16021A-VT  COJBAZO01120  COJBAZO01120  COJBAZO01120  TVRN460-1  C2CBJG000660  C0EBE0000120	IC I	2 1 1 1 2 2 1 1 2 2 1 4 4 4 1 1 3	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6521 IC6543, 42 IC6543 IC6601, 02 IC6607 IC6607 IC6901- 04 IC7101 IC7104- 06 IC7201- 04 IC9901 IC9003 IC9004 IC9005, 06	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COZBZO001033  COZBZO001033  COZBZO00075  NJM2903M  COZBZO000895  COJBAZO00005  COJBAZO01174  AN16021A-VT  AN16021A-VT  COJBAZO01120  COJBAZO01120  COJBAZO01120  TVRN460-1  C2CBJG000660  C0EBE0000120  COJBAZO00120  COJBAZO00150	IC I	2 1 1 2 1 2 2 2 1 4 4 4 1 1 3 4 1 1 1 2	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6521 IC6543, 42 IC6543 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC7101 IC7104- 06 IC7201- 04 IC9001 IC9003 IC9004 IC9005, 06 IC9007	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COZBZO001033  COZBZO001033  COZBZO001033  COZBZO001035  COJBAZO000895  COJBAZO0005  COJBAZO0174  AN16021A-VT  AN16021A-VT  COJBAZO01120  COJBAZO01120  TVRN460-1  C2CBJG000660  COEBE0000120  COJBAZO00120  COJBAZO00120  COJBAZO00120	IC I	2 1 1 2 1 2 2 2 1 4 4 1 3 4 1 1 1 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6521 IC6543, 42 IC6543 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC7101 IC7104- 06 IC7201- 04 IC9001 IC9003 IC9004 IC9005, 06 IC9007 IC9008	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COCBADC00075  NJM2903M  COZBZ0000895  COJBAZ000174  AN16021A-VT  AN16021A-VT  COJBAZ001120  COJBAZ001120  TVRN460-1  C2CBJG000660  C0EBE0000120  COJBAZ000120  COJBAZ000120  COJBAZ000120  TVRN460-1  C2CBJG000660  COEBE0000120  COJBAZ000120  COJBAZ000120  COJBAZ000120  COJBAZ000120  COJBAZ000120  COJBAZ000120  COJBAZ000120  COJBAZ000120  COJBAZ000120	IC INTEGRATED CIRCUIT IC	2 1 1 1 2 2 2 2 1 4 4 4 1 1 1 2 2 2 1 1 1 1	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6521 IC6543 IC6581 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC7101 IC7104- 06 IC7201- 04 IC9001 IC9003 IC9004 IC9007 IC9008 IC9000	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COCBADC00075  NJM2903M  COZBZO000895  COJBAZ00005  COJBAZ000174  AN16021A-VT  AN16021A-VT  COJBAZ001120  COJBAZ001120  TVRN460-1  C2CBJG000660  COEBE0000120  COJBAZ000120  COJBAZ00160  COJBAZ00170  COJBAZ00070	IC I	2 1 1 1 2 2 2 2 1 4 4 4 1 1 1 2 2 1 1 1 2 1 1 1 1	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6521 IC6543 IC6543 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC7201- 04 IC99001 IC99001 IC99007 IC99008 IC99001 IC9300 IC9300 IC9300 IC9300	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COCBADC00075  NJM2903M  COZBZ00010895  COJBAZ000174  AN16021A-VT  AN16021A-VT  COJBAZ001120  COJBAZ001120  COJBAZ001120  TVRN460-1  C2CBJG000660  COEBE0000120  COJBAZ001120  TVRN462  COJBAZ0001769  MN84512-A  PST9128NR	IC IC IC IC IC IC IC IC IC INTEGRATED CIRCUIT IC	2 1 1 1 2 2 2 1 4 4 4 1 1 1 2 2 1 1 1 2 1 1 1 1	
IC6491 IC6501, 02 IC6511 IC6512 IC6521 IC6521 IC6543 IC6601, 02 IC6605, 06 IC6607 IC6901- 04 IC7201- 04 IC7201- 04 IC9001 IC9001 IC90004 IC9005, 06 IC9007 IC9008 IC9000 IC9300	COJBAZO00994  COZBZO001033  COCBADC00075  COZBZO001033  COCBADC00075  NJM2903M  COZBZ00010895  COJBAZ000174  AN16021A-VT  AN16021A-VT  COJBAZ001120  COJBAZ001120  COJBAZ001120  TVRN460-1  C2CBJG000660  COEBC000120  COJBAZ001856  TVRN462  CODBEJG00001  C1ZBZ0002769  MN84512-A	IC I	2 1 1 1 2 2 2 1 4 4 4 1 1 1 2 2 1 1 1 2 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	Part No.	Description	PCS	Remarks
IC9500	C1ZBZ0002599	IC	1	
IC9502	C0JBAZ000856	IC	1	
IC9504	C0JBAZ000856	IC	1	
IC9700	C0DBEJG00001	IC	1	
IC9702	C0DBAZH00020	IC	1	
TW21003	m TD 0 3 6 3 0	MEDMINAT	1	
JK3100A	TJB0A639	TERMINAL	1	
JS012	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50H/M
JS027	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50H/M
JS1000	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS1177	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2003	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50H/M
JS2004	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50A
JS2026	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2031-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS2101,	ERJ3GEY0R00	M 0 OUM 1/16W	2	
02	ERUSGETURUU	M 0 OHM, 1/16W		
JS2105,	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
06				
JS2108	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50H/M
JS2114, 15	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2304-	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
11		-, -, -, -, -, -, -, -, -, -, -, -, -, -		
JS2315	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
24				
JS2329- 32	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS3001	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
15		·		
JS3022,	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
23	ED TOCEWODOO	M 0 0774 1/1677	1	mr. 40035011/14
JS3028 JS3029	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	1	TH-42PA50H/M
JS3202	J0JCC0000241	CHIP INDUCTOR	1	
JS3205	J0JCC0000241	CHIP INDUCTOR	1	
JS3206	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3208	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50H/M
JS3244,	J0JCC0000241	CHIP INDUCTOR	2	TH-42PA50H/M
45				
	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3255	ERJ6GEY0R00	M 0 OHM, 1/10W	1	mr. 40D3E03
	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50A TH-42PA50A
JS3261 JS3265	ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	1	-1 TERSOR
JS3302-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
04		,		
JS3327,	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
28	TD T05	14 0 0mc 4 /5 5	_	mm 40===================================
JS3329	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50H/M
JS3330- 37	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
45				
	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
57	ED TOCEWOOO	M 0 0UM 1/10	-	
	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	3	
68	LIGUGETURUU	11 0 Oill1, 1/10W		
	ERJ3GEY0R00	м 0 ОНМ, 1/16W	8	
08				
	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
24 TG4002	ED 13CEAUDO	M O OUM 1/1677	1	
	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	6	
09	OSGETOROU	U UILI, I/IUW	ັ	
	ERJ3GEY0R00	м 0 ОНМ, 1/16W	3	
14				
JS4022, 23	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
	i	l	I	1

Ref.	Part No.	Part Name & Description	Pcs	Remarks
	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
30				
JS4081 JS4084	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	1	
JS4084	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
92	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
96		·		
JS4901	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5602 JS5609-	ERJ3GEY0R00 ERJ6GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/10W	4	
12	EKOOGETOKOO	M 0 OHM, 1/10W	4	
JS5801, 02	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS5805- 08	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS5810- 18	ERJ6GEY0R00	M 0 OHM, 1/10W	9	
K1	K1KA12BA0053	12P CONNECTOR	1	
L001	J0JGC0000021	CHIP INDUCTOR COIL	1	TH-42PA50H/M
L001	J0JCC0000364	CHIP INDUCTOR	3	TH-42PA50A/M
L004,05	J0JHC0000078	CHIP INDUCTOR	2	TH-42PA50H/M
L006,07	J0JCC0000241	CHIP INDUCTOR	2	TH-42PA50A
L007	EXC3BB221H	BEAD CHOKE	1	TH-42PA50H/M
L008	EXC3BB221H	BEAD CHOKE	1	TH-42PA50A
L008-11	J0JCC0000241	CHIP INDUCTOR	4	TH-42PA50H/M
L012	J0JCC0000241	CHIP INDUCTOR	1	TH-42PA50A
L013	J0JCC0000241 J0JGC0000021	CHIP INDUCTOR CHIP INDUCTOR COIL	1	TH-42PA50H/M TH-42PA50H/M
L017,18	J0JGC0000021	CHIP INDUCTOR COIL	2	TH-42PA50A
L018,19	J0JHC0000078	CHIP INDUCTOR	2	TH-42PA50H/M
L019	J0JCC0000241	CHIP INDUCTOR	1	TH-42PA50A
L021,22	J0JCC0000241	CHIP INDUCTOR	2	TH-42PA50H/M
L024	EXC3BB221H	BEAD CHOKE	1	TH-42PA50H/M
L025,26	J0JCC0000241	CHIP INDUCTOR	2	TH-42PA50H/M
L028	J0JGC0000021	CHIP INDUCTOR COIL	1	TH-42PA50H/M
L031 L1009	J0JGC0000021 J0JHC0000078	CHIP INDUCTOR COIL	1	TH-42PA50H/M
L1110- 14	J0JHC0000078	CHIP INDUCTOR	5	
L1120	J0JHC0000078	CHIP INDUCTOR	1	
L1170	J0JHC0000078	CHIP INDUCTOR	1	
L1172	ELJFA8R2KB	CHIP INDUCTOR	1	
L1174	J0JCC0000241	CHIP INDUCTOR	1	
L1175,7 6	Ј0ЈНС0000078	CHIP INDUCTOR	2	
L2003,0 4	EXC3BB221H	BEAD CHOKE	2	
8	EXC3BB221H	BEAD CHOKE	2	
2	EXC3BB221H	BEAD CHOKE	2	
6	EXC3BB221H	BEAD CHOKE	2	
8		CHIP INDUCTOR	2	
L2109,1 0	TSK1032	BEAD CHOKE	2	
L2111,1 2	J0JCC0000241	CHIP INDUCTOR	2	
L2113,1 4	TSK1032	BEAD CHOKE	2	
L2115,1		CHIP INDUCTOR	2	
L2117	ELESE6R8KA	PEAKING COIL	1	mir 40 Dz 503
L2118 L2120	EXCELDR35C	CHIR INDUCTOR	1	TH-42PA50A
L2120 L2121	J0JCC0000241 EXCELDR35C	CHIP INDUCTOR BEAD CHOKE	1	
L2122	TSK1032	BEAD CHOKE	1	
L2123	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L2178,7 9	J0JCC0000241	CHIP INDUCTOR	2	
L2182- 87	J0JCC0000241	CHIP INDUCTOR	6	
L2204	J0JCC0000241	CHIP INDUCTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L2305,0 6	G0A100ZA0033	CHOKE COIL	2	
L2312,1 3	G0A100ZA0033	CHOKE COIL	2	
L2316- 19	J0JJC0000011	CHIP INDUCTOR	4	
L3001- 03	EXC3BB221H	BEAD CHOKE	3	
L3009	J0JCC0000241	CHIP INDUCTOR	1	
L3010	EXC3BB221H	BEAD CHOKE	1	
L3011	ELJPA100KB	CHIP INDUCTOR	1	
L3013	EXC3BB221H	BEAD CHOKE	1	
L3211	ELJNC15NKB	CHIP COIL	1	
L3212	EXC3BB221H	BEAD CHOKE	1	40
L3213	ELJNC15NKB	CHIP COIL	1	TH-42PA50H/M
L3214 L3216	J0JCC0000364 J0JGC0000021	CHIP INDUCTOR CHIP INDUCTOR COIL	1	TH-42PA50H/M
L3217	J0JCC0000364	CHIP INDUCTOR	1	TH-42PA50H/M
L3217	J0JGC0000021	CHIP INDUCTOR COIL	1	TH-42PA50H/M
L4001	J0JHC0000078	CHIP INDUCTOR	1	12213011,12
L4003,0	J0JHC0000078	CHIP INDUCTOR	2	
L4006- 08	Ј0ЈНС0000078	CHIP INDUCTOR	3	
L4104	J0JCC0000241	CHIP INDUCTOR	1	
L4105	J0JHC0000078	CHIP INDUCTOR	1	
L4106	J0JCC0000241	CHIP INDUCTOR	1	
L4151	J0JCC0000241	CHIP INDUCTOR	1	
L4231	J0JCC0000241	CHIP INDUCTOR	1	
L4301	J0JHC0000078	CHIP INDUCTOR	1	
L4341- 43	Ј0ЈНС0000078	CHIP INDUCTOR	3	
L4344	J0JCC0000241	CHIP INDUCTOR	1	
L4345	J0JHC0000078	CHIP INDUCTOR	1	
L4346	TALC168T100K	CHIP INDUCTOR COIL	1	
L4347,4 8	J0JCC0000241	CHIP INDUCTOR	2	
L4350	J0JHC0000078	CHIP INDUCTOR	1	
L4501	J0JHC0000078	CHIP INDUCTOR	1	
L4503,0 4	J0JHC0000078	CHIP INDUCTOR	2	
L4505	J0JCC0000241	CHIP INDUCTOR	1	
L4506	J0JHC0000078	CHIP INDUCTOR	1	
L4508,0 9	Ј0ЈНС0000078	CHIP INDUCTOR	2	
L4510	J0JCC0000241	CHIP INDUCTOR	1	
L4511	Ј0ЈНС0000078	CHIP INDUCTOR	1	
L4701	Ј0ЈНС0000078	CHIP INDUCTOR	1	
L4751	J0JCC0000241	CHIP INDUCTOR	1	
L4801- 03	J0JHC0000078	CHIP INDUCTOR	3	
L4861,6 2	J0JHC0000078	CHIP INDUCTOR	2	
L4900	J0JHC0000078	CHIP INDUCTOR	1	
L5604	G0A470GA0002	CHOKE COIL	1	
L5605 L5606	G1C1R0MA0072 TALL08N120KA	CHOKE COIL INDUCTION COIL	1	
L5606	G0C101K00023	PEAKING COIL	1	
L5608	G1C100MA0072	CHOKE COIL	1	
L5609	TALLO8N120KA	INDUCTION COIL	1	
L5610	G1C470MA0077	INDUCTION COIL	1	
L5611	G1A470ZA0007	CHOKE COIL	1	
L5612	G0A220GA0002	CHOKE COIL	1	
L5613,1 4	G1A470ZA0007	CHOKE COIL	2	
L5615	G0A220GA0002	CHOKE COIL	1	
L5616	G1A470ZA0007	CHOKE COIL	1	
L5808	G0A100GA0013	CHOKE COIL	1	
L5810	G0A100GA0013	CHOKE COIL	1	
L6002- 04	G0ZZ00002183	PEAKING COIL	3	
L6005	G0C101K00023	PEAKING COIL	1	
L6011- 13	GOAR60MA0003	CHOKE COIL	3	
L6014,1 5	G0A1R0MA0003	CHOKE COIL	2	

Ref.   Part No.   Part Name & Pos   Remarks   No.   No.   Description   1   1   1   1   1   1   1   1   1					
16018   JOJUCO000021	Ref.	Part No.	Part Name &	Pcs	Remarks
L6019	No.		Description		
16019   G0Z200002183   PERKING COIL	L6018	J0JJC0000021	CHIP INDUCTOR	1	
L6024				1	
16024				<b>-</b>	
27				<u> </u>	
L6034 - GOZZOUOUZ183 PEAKING COIL		G0ZZ00002183	PEAKING COIL	4	
100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100   100	27				
L6042,4 J0JJC0000021 CHIP INDUCTOR 2  1	L6034-	G0ZZ00002183	PEAKING COIL	4	
1	37				
L6047	L6042,4	J0JJC0000021	CHIP INDUCTOR	2	
L6050 G0ZZ00002183 PEAKING COIL 1 L6451 J0JJC0000021 CHIF INDUCTOR 1 L6471 J0JJC000021 CHIF INDUCTOR 1 L6472 G0ZZ00002183 PEAKING COIL 1 L6472 G0ZZ00002183 PEAKING COIL 1 L6602 G0ZZ00002183 PEAKING COIL 1 L6604, 0 G0ZZ00002183 PEAKING COIL 1 L6611- G0AR60MA0003 CHOKE COIL 3 13 L6614, 1 GOAR60MA0003 CHOKE COIL 2 5 L6614 J0JJC0000212 CHIF INDUCTOR 1 L6624- G0ZZ00002183 PEAKING COIL 2 5 L6634 J0JJC0000021 CHIF INDUCTOR 1 L6634- G0ZZ00002183 PEAKING COIL 4 27 L6634 J0JJC0000021 CHIF INDUCTOR 1 L9200 G1C150KA0038 INDUCTION COIL 4 L9500 G1C150KA0038 INDUCTION COIL 1 L9701 G1C6R8M00009 CHIF INDUCTOR 1 PA7 KIKA08AA0192 8P CONNECTOR 1 PA30 KIMN30A00068 30P CONNECTOR 1 PA3601, K5H4022A0023 FUSE 2 02 PB5 KIRA11AA0194 IP CONNECTOR 1 PA5601, K5H4022A0023 FUSE 2 02 PF5 KIRA11AA0194 IP CONNECTOR 1 PC6458 B3PBA0000223 IC 1 PC6467 B3PBA0000223 IC 1 PC6467 B3PBA0000223 IC 1 PC6467 B3PBA0000223 IC 1 PC6474 B3PBA0000223 IC 1 PC6507 B3PBA0000223 IC 1 PC6508 B3PBA0000223 IC 1 PC6509 B3PBA000023 IC 1 PC6509 B3PBA000023 IC 1 PC6617 B3PBA000023 IC 1 PC6617 B3PBA0000223 IC 1 PC6474 B3PBA000023 IC 1 PC6474 B3PBA0000223 IC 1 PC6474 B3PBA000023 IC 1 PC6474 B3PBA000024 IC 1 PC6474 B3PBA000024 IC 1 PC6474 B3PBA000024 IC 1 PC6475 B3PBA000025 IC 1 PC6476 B3PBA000027 IC 1 PC6476 B3PBA000027 IC 1 PC6476 B3PBA00002 IC 1 PC6476 B3PBA00002 IC 1 PC6477 B3PBA0000	3				
L6451 J0JJC0000021 CHIP INDUCTOR 1 L6453 J0JJC0000021 CHIP INDUCTOR 1 L6472 G0Z00002183 PEAKING COIL 1 L6602 G0Z200002183 PEAKING COIL 1 L6604,0 G0Z200002183 PEAKING COIL 1 L6604,0 G0Z200002183 PEAKING COIL 1 L6611 G0AR60MA0003 CHOKE COIL 2 5 L6611 G0AR60MA0003 CHOKE COIL 3 L6611 G0AR60MA0003 CHOKE COIL 2 5 L6618 J0JJC0000021 CHIP INDUCTOR 1 L6624 G0Z200002183 PEAKING COIL 4 27 L6634 G0Z200002183 PEAKING COIL 4 27 L6634 G0Z20000218 PEAKING COIL 4 27 L6634 G0Z20000218 PEAKING COIL 4 27 L6637 J0JJC0000021 CHIP INDUCTOR 1 L9200 G1C150KA0038 INDUCTION COIL 1 L9500,0 J0JHC0000078 CHIP INDUCTOR 1 L9700 G1C4R3M00003 CHIP INDUCTOR 1 L9701 G1C6R8M0009 CHIP INDUCTOR 1 L9701 G1C6R8M0009 CHIP INDUCTOR 1 PA7 KIRA08AA0192 BP CONNECTOR 1 PA30 KIMA03A00068 3DP CONNECTOR 1 PA30 KIMA03A0008 3DP CONNECTOR 1 PA30 KIMA03A0008 3DP CONNECTOR 1 PA30 KIMA03A0008 3DP CONNECTOR 1 PC6458 B3PBA0000223 IC 1 PC6467 B3PBA0000223 IC 1 PC6468 B3PBA0000223 IC 1 PC6468 B3PBA0000223 IC 1 PC6474 B3PBA0000223 IC 1 PC6468 B3PBA0000223 IC 1 PC6468 B3PBA0000223 IC 1 PC6469 B3PBA0000223 IC 1 PC6469 B3PBA0000223 IC 1 PC6509 B3PBA000023 IC 1 PC6509 B3PBA000	L6047	J0JJC0000021	CHIP INDUCTOR	1	
L6451 J0JJC0000021 CHIP INDUCTOR 1 L6453 J0JJC0000021 CHIP INDUCTOR 1 L6472 G0Z00002183 PEAKING COIL 1 L6602 G0Z200002183 PEAKING COIL 1 L6604,0 G0Z200002183 PEAKING COIL 1 L6604,0 G0Z200002183 PEAKING COIL 1 L6611 G0AR60MA0003 CHOKE COIL 2 5 L6611 G0AR60MA0003 CHOKE COIL 3 L6611 G0AR60MA0003 CHOKE COIL 2 5 L6618 J0JJC0000021 CHIP INDUCTOR 1 L6624 G0Z200002183 PEAKING COIL 4 27 L6634 G0Z200002183 PEAKING COIL 4 27 L6634 G0Z20000218 PEAKING COIL 4 27 L6634 G0Z20000218 PEAKING COIL 4 27 L6637 J0JJC0000021 CHIP INDUCTOR 1 L9200 G1C150KA0038 INDUCTION COIL 1 L9500,0 J0JHC0000078 CHIP INDUCTOR 1 L9700 G1C4R3M00003 CHIP INDUCTOR 1 L9701 G1C6R8M0009 CHIP INDUCTOR 1 L9701 G1C6R8M0009 CHIP INDUCTOR 1 PA7 KIRA08AA0192 BP CONNECTOR 1 PA30 KIMA03A00068 3DP CONNECTOR 1 PA30 KIMA03A0008 3DP CONNECTOR 1 PA30 KIMA03A0008 3DP CONNECTOR 1 PA30 KIMA03A0008 3DP CONNECTOR 1 PC6458 B3PBA0000223 IC 1 PC6467 B3PBA0000223 IC 1 PC6468 B3PBA0000223 IC 1 PC6468 B3PBA0000223 IC 1 PC6474 B3PBA0000223 IC 1 PC6468 B3PBA0000223 IC 1 PC6468 B3PBA0000223 IC 1 PC6469 B3PBA0000223 IC 1 PC6469 B3PBA0000223 IC 1 PC6509 B3PBA000023 IC 1 PC6509 B3PBA000	T.6050	G02200002183	PEAKING COIL	1	
L6453 J0JJC0000021 CHIP INDUCTOR 1 L6471 J0JJC0000021 CHIP INDUCTOR 1 L6472 G0Z200002183 PEARING COIL 1 L6602 G0Z200002183 PEARING COIL 1 L6604 G0Z200002183 PEARING COIL 2 5 L6611 G0AR60MA0003 CHOKE COIL 2 5 L6614 J0JJC0000021 CHIP INDUCTOR 1 L6624 G0Z200002183 PEARING COIL 2 5 L6618 J0JJC0000021 CHIP INDUCTOR 1 L6634 G0Z200002183 PEARING COIL 4 27 L6634 G0Z200002183 PEARING COIL 4 27 L6634 J0JJC0000021 CHIP INDUCTOR 1 L9500 G1C150KA0038 INDUCTION COIL 1 L9500 G1C150KA0038 INDUCTION COIL 1 L9700 G1C4R3M00003 CHIP INDUCTOR 1 L9701 G1C6R8M00000 CHIP INDUCTOR 1 L9701 G1C6R8M00000 CHIP INDUCTOR 1 PA7 K1KA08AA0192 BP CONNECTOR 1 PA20 K1KA06A00452 BP CONNECTOR 1 PA20 K1KA06A00452 BP CONNECTOR 1 PA30 K1KA06A00452 BP CONNECTOR 1 PA30 K1KA06A00452 BP CONNECTOR 1 PA30 K1KA06A00452 BP CONNECTOR 1 PA5601, K5H4022A0023 FUSE 2  PEF K1KA11AA0194 IIP CONNECTOR 1 PC6467 B3PBA0000223 IC 1 PC6507 B3PBA0000223 IC 1 PC6500 B3PBA000023 IC 1 PC6500 B3PBA000024 IC 1 PC6500 B3PBA000024 IC 1 PC6500 B3PBA000					
L6471					
L6472 G0ZZ00002183 PEAKING COIL 1 L6602 G0Z200002183 PEAKING COIL 1 L6604,0 G0ZZ00002183 PEAKING COIL 2 5 L6611- G0AR60MA0003 CHOKE COIL 3 L6611- G0AR60MA0003 CHOKE COIL 3 L6614,1 G0AIR0MA0003 CHOKE COIL 2 5 L6618 J0JJC0000021 CHIP INDUCTOR 1 L6624- G0ZZ00002183 PEAKING COIL 4 27 L6634- G0ZZ00002183 PEAKING COIL 4 L6647 J0JJC0000021 CHIP INDUCTOR 1 L6647 J0JJC0000021 CHIP INDUCTOR 1 L9500,0 J0JHC0000078 CHIP INDUCTOR 2 L9700 G1C150KA0038 INDUCTION COIL 1 L9700 G1C4R3M00003 CHIP INDUCTOR 2 L9701 G1C6R8M00009 CHIP INDUCTOR 1 L9701 G1C6R8M00009 CHIP INDUCTOR 1 L9701 KIKA06A00452 GP CONNECTOR 1 PA10 KIKA06A00458 GP CONNECTOR 1 PA20 KIMN30A00068 GP CONNECTOR 1 PA35601, K5H4022A0023 FUSE 2 02 PB5 KIKA11AA0194 IP CONNECTOR 1 PE6458 B3PBA0000223 IC 1 PC6467 B3PBA000023 IC 1 PC6467 B3PBA000023 IC 1 PC6467 B3PBA000023 IC 1 PC6467 B3PBA000023 IC 1 PC6468 B3PBA000023 IC 1 PC6507 B3PBA00002 IC 1 PC6	L6453	J0JJC0000021	CHIP INDUCTOR	1	
L6602 GOZZO0002183 PEAKING COIL 1 L6604,0 GOZZO0002183 PEAKING COIL 2 5 L6611- GOARGOMA0003 CHOKE COIL 3 13 16614,1 GOARGOMA0003 CHOKE COIL 2 5 L6618 JOJJC0000212 CHIP INDUCTOR 1 L6624- GOZZO0002183 PEAKING COIL 4 27 L6634 GOZZO0002183 PEAKING COIL 4 27 L6647 JOJJC0000021 CHIP INDUCTOR 1 L9500,0 GIC150KA0038 INDUCTION COIL 1 L9700 GIC4R3M00003 CHIP INDUCTOR 2 1 L9701 GIC6R8M00009 CHIP INDUCTOR 1 L9701 GIC6R8M0009 CHIP INDUCTOR 1 L9701 KIKA06A00452 6P CONNECTOR 1 PA10 KIKA06A00452 6P CONNECTOR 1 PA20 KIMA03A00068 3OP CONNECTOR 1 PA20 KIMA03A00068 3OP CONNECTOR 1 PA30 KIMA03A0006 SOP CONNECTOR 1 PA30 KIMA03A0008 SOP CONNECTOR 1 PA5601, K5H4022A0023 FUSE 2 2 PB5 KIKA11AA0194 11P CONNECTOR 1 PC6458 B3PBA0000223 IC 1 PC6467 B3PBA0000223 IC 1 PC6467 B3PBA0000223 IC 1 PC6467 B3PBA0000223 IC 1 PC6505 B3PBA0000223 IC 1 PC6505 B3PBA0000223 IC 1 PC6505 B3PBA0000223 IC 1 PC6507 B3PBA0000223 IC 1 PC6507 B3PBA000023 IC 1 PC6508 B3PBA000023 IC 1 PC6509 B3PBA000023 IC 1 PC6501 B3PBA000023 IC 1 PC6500 B3PBA00002 IC 1 PC6500 B3PBA00002 IC 1 PC6500 B3PBA00002 IC 1 PC6500 B3PBA000002 IC 1 PC6500 B3PBA00002 IC 1 PC650	L6471	J0JJC0000021	CHIP INDUCTOR	1	
L6604,0 G0ZZ00002183 PEAKING COIL 2 5 16614,1 G0AR60MA0003 CHOKE COIL 3 13 16614,1 GOA1R0MA0003 CHOKE COIL 2 16618 J0JJC000021 CHIP INDUCTOR 1 16624- G0ZZ00002183 PEAKING COIL 4 27 16634- G0ZZ00002183 PEAKING COIL 4 27 16647 J0JJC0000021 CHIP INDUCTOR 1 19200 G1C150KA0038 INDUCTION COIL 1 19500,0 J0JHC0000078 CHIP INDUCTOR 2 1 19700 G1C4R3M00003 CHIP INDUCTOR 1 19701 G1C6R6M00009 CHIP INDUCTOR 1 19701 G1C6R6M0009 CHIP INDUCTOR 1 19701 KIKA08AA0192 BP CONNECTOR 1 PA1 KIKA08A00452 6P CONNECTOR 1 PA30 KIMM30A0068 3OP CONNECTOR 1 PA30 KIMM30A0068 3OP CONNECTOR 1 PA5601, K5H4022A0023 FUSE 2 02 PB5 KIKA11AA0194 11P CONNECTOR 1 PC6458 B3PBA0000223 IC 1 PC6469 B3PBA0000223 IC 1 PC6469 B3PBA0000223 IC 1 PC6469 B3PBA0000223 IC 1 PC6474 B3PBA0000223 IC 1 PC6476 B3PBA0000223 IC 1 PC6476 B3PBA0000223 IC 1 PC6507 B3PBA0000223 IC 1 PC6507 B3PBA0000223 IC 1 PC6507 B3PBA0000233 IC 1 PC6507 B3PBA0000234 IC 2 PC6507 B3PBA0000234 IC 2 PC6507 B3PBA0000235 IC 1 PC6507 B3PBA0000237 IC 1 PC6507 B3PBA000024 IC 1 PC6507 B3PBA000024 IC 1 PC6507 B3PBA000024 IC 1 PC6507 B3PBA000024 I	L6472	G0ZZ00002183	PEAKING COIL	1	
L6604,0 G0ZZ00002183 PEAKING COIL 2 5 16614,1 G0AR60MA0003 CHOKE COIL 3 13 16614,1 GOA1R0MA0003 CHOKE COIL 2 16618 J0JJC000021 CHIP INDUCTOR 1 16624- G0ZZ00002183 PEAKING COIL 4 27 16634- G0ZZ00002183 PEAKING COIL 4 27 16647 J0JJC0000021 CHIP INDUCTOR 1 19200 G1C150KA0038 INDUCTION COIL 1 19500,0 J0JHC0000078 CHIP INDUCTOR 2 1 19700 G1C4R3M00003 CHIP INDUCTOR 1 19701 G1C6R6M00009 CHIP INDUCTOR 1 19701 G1C6R6M0009 CHIP INDUCTOR 1 19701 KIKA08AA0192 BP CONNECTOR 1 PA1 KIKA08A00452 6P CONNECTOR 1 PA30 KIMM30A0068 3OP CONNECTOR 1 PA30 KIMM30A0068 3OP CONNECTOR 1 PA5601, K5H4022A0023 FUSE 2 02 PB5 KIKA11AA0194 11P CONNECTOR 1 PC6458 B3PBA0000223 IC 1 PC6469 B3PBA0000223 IC 1 PC6469 B3PBA0000223 IC 1 PC6469 B3PBA0000223 IC 1 PC6474 B3PBA0000223 IC 1 PC6476 B3PBA0000223 IC 1 PC6476 B3PBA0000223 IC 1 PC6507 B3PBA0000223 IC 1 PC6507 B3PBA0000223 IC 1 PC6507 B3PBA0000233 IC 1 PC6507 B3PBA0000234 IC 2 PC6507 B3PBA0000234 IC 2 PC6507 B3PBA0000235 IC 1 PC6507 B3PBA0000237 IC 1 PC6507 B3PBA000024 IC 1 PC6507 B3PBA000024 IC 1 PC6507 B3PBA000024 IC 1 PC6507 B3PBA000024 I	L6602	G0ZZ00002183	PEAKING COIL	1	
S				2	
L6611-   GOARGOMAOOO3   CHOKE COIL   3   13   13   13   14   16614,1   GOAIROMAOOO3   CHOKE COIL   2   5   5   16618   JOJJCOOOOO21   CHIP INDUCTOR   1   L6624-   GOZZOOOO2183   PEAKING COIL   4   4   7   16634-   GOZZOOOO2183   PEAKING COIL   4   4   7   16634-   GOZZOOOO02183   PEAKING COIL   4   7   16634-   GOZZOOOO02183   PEAKING COIL   1   L9200   GIC150KAOO38   INDUCTION COIL   1   L9500,0   JOJHCOOOOO78   CHIP INDUCTOR   2   1   L9700   GIC4RSMOOOO3   CHIP INDUCTOR   1   L9700   GIC4RSMOOOO3   CHIP INDUCTOR   1   L9701   GIC6RSMOOOO9   CHIP INDUCTOR   1   L9701   KIKAOSAAO192   SP CONNECTOR   1   PA10   KIKAOSAAO0452   GP CONNECTOR   1   PA20   KIMM3OAOO068   30P CONNECTOR   1   PA5601, KSH402ZAOO23   FUSE   2   2   2   2   2   2   2   2   2	_	G02200002103	PEAKING COIL	-	
13	_	G03 D C0343 0003	GHOVE GOTT	-	
L6614,1 GOAIROMAOOO3 CHOKE COIL 2 L6618 JOJJC0000021 CHIP INDUCTOR 1 L6624- GOZZ00002183 PEAKING COIL 4 27 L6634- GOZZ00002183 PEAKING COIL 4 37 L6647 JOJJC0000021 CHIP INDUCTOR 1 L9200 GIC150KA0038 INDUCTION COIL 1 L9500,0 JOJHC0000078 CHIP INDUCTOR 2 1 L9700 GIC4R3M00003 CHIP INDUCTOR 1 L9701 GIC6R8M00009 CHIP INDUCTOR 1 L9701 KIKA06A00452 6P CONNECTOR 1 PA1 KIKA06A00452 6P CONNECTOR 1 PA20 KIMM30A00068 3OP CONNECTOR 1 PA30 KIMM30A00068 3OP CONNECTOR 1 PA5601, K5H402ZA0023 FUSE 2 2 PB5 KIKA11AA0194 I1P CONNECTOR 1 PB7 KIKA08AA0192 BP CONNECTOR 1 PB7 KIKA08AA0192 BP CONNECTOR 1 PC6467 B3PBA0000223 IC 1 PC6467 B3PBA0000223 IC 1 PC6467 B3PBA0000223 IC 1 PC6503 B3PBA0000223 IC 1 PC6503 B3PBA0000223 IC 1 PC6503 B3PBA0000223 IC 1 PC6505 B3PBA0000223 IC 1 PC6505 B3PBA0000223 IC 1 PC6507 B3PBA0000223 IC 1 PC6509, B3PBA0000223 IC 1 PC6509, B3PBA0000223 IC 1 PC6509, B3PBA0000223 IC 1 PC6509, B3PBA0000223 IC 1 PC6517 B3PBA0000223 IC 1 PC6517 B3PBA000023 IC 1 PC6517 B3PBA000023 IC 1 PC6517 B3PBA0000223 IC 1 PC6517 B3PBA000023 IC 1 PC6510 B3PBA00002 IC 1 PC6510 B3PBA00002 IC 1 PC6510 B3PBA00002 IC 1 PC6510 B3PBA00000 IC		GUARBUMAUUUS	CHOKE COIL	3	
S				_	
L6618	_	GUAIROMA0003	CHOKE COIL	2	
L6624-   G0ZZ00002183   PEAKING COIL   4   27   28   27   28   27   28   29   29   29   29   29   29   29		_		-	
27	L6618	J0JJC0000021	CHIP INDUCTOR	1	
L6634-   GOZZOO002183   PEAKING COIL   4   37   37   37   37   37   37   37	L6624-	G0ZZ00002183	PEAKING COIL	4	
1	27			L_	
1	L6634-	G0ZZ00002183	PEAKING COIL	4	
L6647					
L9200	T.6647	.T0.T.TC0000021	CHIP INDUCTOR	1	
L9500,0				<del>                                     </del>	
1			+	<del></del>	
L9700   G1C4R3M00003   CHIP INDUCTOR   1		Ј0ЈНС0000078	CHIP INDUCTOR	2	
L9701   GIC6R8M00009   CHIP INDUCTOR   1	1				
PAT	L9700	G1C4R3M00003	CHIP INDUCTOR	1	
PA10	L9701	G1C6R8M00009	CHIP INDUCTOR	1	
PA10					
PA10	DA 7	K1KA08AA0192	SD CONNECTOR	1	
PA20				<del></del>	
PA30				_	
PA5601,   K5H4022A0023   FUSE   2   2   2   2   2   2   2   2   2	PA20	K1MN30A00068	30P CONNECTOR	1	
D2	PA30	K1MN30A00068	30P CONNECTOR	1	
D2					
PB7	PA5601,	K5H4022A0023	FUSE	2	
PB7		K5H4022A0023	FUSE	2	
PB7		K5H4022A0023	FUSE	2	
PC6458 B3PBA0000223 IC	02				
PC6467   B3PBA0000223   IC	02 PB5	K1KA11AA0194	11P CONNECTOR	1	
PC6467   B3PBA0000223   IC	02 PB5	K1KA11AA0194	11P CONNECTOR	1	
PC6469   B3PBA0000223   IC	02 PB5	K1KA11AA0194	11P CONNECTOR	1	
PC6474         B3PBA0000223         IC         1           PC6480         B3PBA0000223         IC         1           PC6503         B3PBA0000233         IC         1           PC6505         B3PBA0000233         IC         1           PC6507         B3PBA0000233         IC         1           PC6509,         B3PBA0000234         IC         2           10         PC6517         B3PBA0000223         IC         1           Q1170         2SA207700L         TRANSISTOR         1           Q1172         2SD601A         TRANSISTOR         1           Q1174, 7         2SD601A         TRANSISTOR         2           Q1176         UN5211         TRANSISTOR         1           Q1177         UN5111         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q1200         2SD601A         TRANSISTOR         1           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SB601A         TRANSISTOR	02 PB5 PB7	K1KA11AA0194 K1KA08AA0192	11P CONNECTOR  BP CONNECTOR	1 1	
PC6474         B3PBA0000223         IC         1           PC6480         B3PBA0000223         IC         1           PC6503         B3PBA0000233         IC         1           PC6505         B3PBA0000233         IC         1           PC6507         B3PBA0000233         IC         1           PC6509,         B3PBA0000234         IC         2           10         PC6517         B3PBA0000223         IC         1           Q1170         2SA207700L         TRANSISTOR         1           Q1172         2SD601A         TRANSISTOR         1           Q1174, 7         2SD601A         TRANSISTOR         2           Q1176         UN5211         TRANSISTOR         1           Q1177         UN5111         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q1200         2SD601A         TRANSISTOR         1           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SB601A         TRANSISTOR	PB5 PB7 PC6458	K1KA11AA0194 K1KA08AA0192 B3PBA0000223	11P CONNECTOR  8P CONNECTOR  IC	1 1	
PC6480   B3PBA0000223   IC	PB5 PB7 PC6458 PC6467	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223	11P CONNECTOR  8P CONNECTOR  IC IC	1 1 1	
PC6503   B3PBA0000233   IC	PB5 PB7 PC6458 PC6467 PC6469	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223	11P CONNECTOR  8P CONNECTOR  IC IC	1 1 1 1 1	
PC6505   B3PBA0000233   IC	PB5 PB7 PC6458 PC6467 PC6469 PC6474	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223	11P CONNECTOR  8P CONNECTOR  IC  IC  IC	1 1 1 1 1 1	
PC6507   B3PBA0000233   IC	PB5 PB7 PC6458 PC6467 PC6469 PC6474	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223	11P CONNECTOR  8P CONNECTOR  IC  IC  IC	1 1 1 1 1 1	
PC6509, B3PBA0000234 IC 2 10 PC6517 B3PBA0000223 IC 1  Q1170 2SA207700L TRANSISTOR 1 Q1172 2SD601A TRANSISTOR 1 Q1174,7 2SD601A TRANSISTOR 2 Q1176 UN5211 TRANSISTOR 1 Q1177 UN5111 TRANSISTOR 1 Q1178 UN5211 TRANSISTOR 1 Q1180 UN5211 TRANSISTOR 1 Q1180 UN5211 TRANSISTOR 1 Q1182 2SD601A TRANSISTOR 1 Q1184 2SD601A TRANSISTOR 1 Q1184 2SD601A TRANSISTOR 1 Q2001,0 2SD601A TRANSISTOR 1 Q2001,0 2SD601A TRANSISTOR 1 Q2001,0 2SD601A TRANSISTOR 1 Q2011 2SB709A TRANSISTOR 1 Q2012 2SD601A TRANSISTOR 1 Q2013 2SB709A TRANSISTOR 1 Q2102- 2SB709A TRANSISTOR 1 Q2102- 2SB709A TRANSISTOR 1 Q2102- 2SB709A TRANSISTOR 4 D5 Q2106- 2SD601A TRANSISTOR 4	PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223	11P CONNECTOR  8P CONNECTOR  IC  IC  IC  IC	1 1 1 1 1 1	
10	PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223	11P CONNECTOR  8P CONNECTOR  IC  IC  IC  IC  IC	1 1 1 1 1 1 1	
10	PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6505	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233	11P CONNECTOR  8P CONNECTOR  IC  IC  IC  IC  IC  IC	1 1 1 1 1 1 1 1	
PC6517   B3PBA0000223   IC	PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6505 PC6507	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000233	11P CONNECTOR  8P CONNECTOR  IC IC IC IC IC IC IC	1 1 1 1 1 1 1 1 1	
Q1170         2SA207700L         TRANSISTOR         1           Q1172         2SD601A         TRANSISTOR         1           Q1174,7         2SD601A         TRANSISTOR         2           5         UN5211         TRANSISTOR         1           Q1177         UN5111         TRANSISTOR         1           Q1178         UN5211         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1182         2SD601A         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q1200         2SD601A         TRANSISTOR         1           Q2001,0         2SD601A         TRANSISTOR         2           2         2         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           Q2106-         2SD601A         TRANSISTOR         4	D2 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6505 PC6507 PC6509,	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000233	11P CONNECTOR  8P CONNECTOR  IC IC IC IC IC IC IC	1 1 1 1 1 1 1 1 1	
Q1172         2SD601A         TRANSISTOR         1           Q1174,7         2SD601A         TRANSISTOR         2           Q1176         UN5211         TRANSISTOR         1           Q1177         UN5111         TRANSISTOR         1           Q1178         UN5211         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1182         2SD601A         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q2001         2SD601A         TRANSISTOR         2           2         2         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           Q5         22106-         2SD601A         TRANSISTOR         4	D2 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6505 PC6507 PC6509,	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000233	11P CONNECTOR  BP CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 2	
Q1172         2SD601A         TRANSISTOR         1           Q1174,7         2SD601A         TRANSISTOR         2           Q1176         UN5211         TRANSISTOR         1           Q1177         UN5111         TRANSISTOR         1           Q1178         UN5211         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1182         2SD601A         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q2001         2SD601A         TRANSISTOR         2           2         2         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           Q5         22106-         2SD601A         TRANSISTOR         4	D2 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6505 PC6507 PC6509,	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000233	11P CONNECTOR  BP CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 2	
Q1174,7     2SD601A     TRANSISTOR     2       Q1176     UN5211     TRANSISTOR     1       Q1177     UN5111     TRANSISTOR     1       Q1178     UN5211     TRANSISTOR     1       Q1180     UN5211     TRANSISTOR     1       Q1182     2SD601A     TRANSISTOR     1       Q1184     2SD601A     TRANSISTOR     1       Q1200     2SD601A     TRANSISTOR     1       Q2001,0     2SD601A     TRANSISTOR     2       Q2011     2SB709A     TRANSISTOR     1       Q2012     2SB709A     TRANSISTOR     1       Q2102-     2SB709A     TRANSISTOR     1       Q2102-     2SB709A     TRANSISTOR     4       Q5     22106-     2SD601A     TRANSISTOR     4	D2 PB5 PB7 PC6458 PC64467 PC6469 PC6474 PC6480 PC6503 PC6507 PC6507 PC6517	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000234	11P CONNECTOR  8P CONNECTOR  IC IC IC IC IC IC IC IC IC	1 1 1 1 1 1 1 1 1 2	
5         Q1176         UN5211         TRANSISTOR         1           Q1177         UN5111         TRANSISTOR         1           Q1178         UN5211         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1182         2SD601A         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q1200         2SD601A         TRANSISTOR         1           Q2001,0         2SD601A         TRANSISTOR         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           Q5         22106-         2SD601A         TRANSISTOR         4	D2 PB5 PB7 PC6458 PC64467 PC6469 PC6474 PC6480 PC6503 PC6507 PC6507 PC6517	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000234 B3PBA0000234	11P CONNECTOR  8P CONNECTOR  IC IC IC IC IC IC IC IC IC	1 1 1 1 1 1 1 1 1 2	
5         Q1176         UN5211         TRANSISTOR         1           Q1177         UN5111         TRANSISTOR         1           Q1178         UN5211         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1182         2SD601A         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q1200         2SD601A         TRANSISTOR         1           Q2001,0         2SD601A         TRANSISTOR         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           Q5         22106-         2SD601A         TRANSISTOR         4	D2 PB5 PB7 PC6458 PC64467 PC64469 PC6474 PC6480 PC6503 PC6507 PC6507 PC6507 PC6517	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000234 B3PBA0000234	11P CONNECTOR  BP CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 2	
Q1177         UN5111         TRANSISTOR         1           Q1178         UN5211         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1182         2SD601A         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q1200         2SD601A         TRANSISTOR         1           Q2001,0         2SD601A         TRANSISTOR         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           05         Q2106-         2SD601A         TRANSISTOR         4	D2 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000234 B3PBA0000234 B3PBA0000234	11P CONNECTOR  BP CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 1 2	
Q1177         UN5111         TRANSISTOR         1           Q1178         UN5211         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1182         2SD601A         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q1200         2SD601A         TRANSISTOR         1           Q2001,0         2SD601A         TRANSISTOR         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           05         Q2106-         2SD601A         TRANSISTOR         4	PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000234 B3PBA0000234 B3PBA0000234	11P CONNECTOR  BP CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 1 2	
Q1178         UN5211         TRANSISTOR         1           Q1180         UN5211         TRANSISTOR         1           Q1182         2SD601A         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q1200         2SD601A         TRANSISTOR         1           Q2001,0         2SD601A         TRANSISTOR         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           Q5         22106-         2SD601A         TRANSISTOR         4	D2 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000223 2SA207700L 2SD601A	11P CONNECTOR  8P CONNECTOR  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Q1180         UN5211         TRANSISTOR         1           Q1182         2SD601A         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q1200         2SD601A         TRANSISTOR         1           Q2001,0         2SD601A         TRANSISTOR         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           05         Q2106-         2SD601A         TRANSISTOR         4         TH-42PA50A	02 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000223 2SA207700L 2SD601A 2SD601A	11P CONNECTOR  8P CONNECTOR  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Q1182         2SD601A         TRANSISTOR         1           Q1184         2SD601A         TRANSISTOR         1           Q1200         2SD601A         TRANSISTOR         1           Q2001,0         2SD601A         TRANSISTOR         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           05         Q2106-         2SD601A         TRANSISTOR         4         TH-42PA50A	D2 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000223 2SA207700L 2SD601A 2SD601A UN5211 UN5111	11P CONNECTOR  8P CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1	
Q1184         2SD601A         TRANSISTOR         1           Q1200         2SD601A         TRANSISTOR         1           Q2001,0         2SD601A         TRANSISTOR         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           05         2SD601A         TRANSISTOR         4         TH-42PA50A	02 PB5 PB7 PC6458 PC6458 PC6467 PC6469 PC6474 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000234 B3PBA0000223 2SA207700L 2SD601A 2SD601A UN5211 UN5211	11P CONNECTOR  8P CONNECTOR  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Q1200         2SD601A         TRANSISTOR         1           Q2001,0         2SD601A         TRANSISTOR         2           2         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           05         Q2106-         2SD601A         TRANSISTOR         4         TH-42PA50A	02 PB5 PB7 PC6458 PC6458 PC6467 PC6469 PC6474 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000234 B3PBA0000223 2SA207700L 2SD601A 2SD601A UN5211 UN5211	11P CONNECTOR  8P CONNECTOR  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Q1200         2SD601A         TRANSISTOR         1           Q2001,0         2SD601A         TRANSISTOR         2           2         2           Q2011         2SB709A         TRANSISTOR         1           Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           05         Q2106-         2SD601A         TRANSISTOR         4         TH-42PA50A	02 PB5 PB7 PC6458 PC6469 PC6469 PC6474 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1178 Q1180	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000234 B3PBA0000223 2SA207700L 2SD601A 2SD601A UN5211 UN5211 UN5211	11P CONNECTOR  8P CONNECTOR  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Q2001,0     2SD601A     TRANSISTOR     2       Q2011     2SB709A     TRANSISTOR     1       Q2012     2SD601A     TRANSISTOR     1       Q2013     2SB709A     TRANSISTOR     1       Q2102-     2SB709A     TRANSISTOR     4       05     2SD601A     TRANSISTOR     4     TH-42PA50A	02 PB5 PB7 PC6458 PC6469 PC6469 PC6474 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1178 Q1180 Q1182	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000223  2SA207700L 2SD601A 2SD601A UN5211 UN5211 UN5211 UN5211 2SD601A	11P CONNECTOR  8P CONNECTOR  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
2	02 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1178 Q1180 Q1182 Q1184	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000223 2SA207700L 2SD601A 2SD601A UN5211 UN5211 UN5211 UN5211 2SD601A 2SD601A	11P CONNECTOR  8P CONNECTOR  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Q2011         2SB709A         TRANSISTOR         1           Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           05         Q2106-         2SD601A         TRANSISTOR         4         TH-42PA50A	02 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1178 Q1180 Q1182 Q1184 Q1200	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000223 2SA207700L 2SD601A 2SD601A UN5211 UN5211 UN5211 UN5211 2SD601A 2SD601A 2SD601A	11P CONNECTOR  8P CONNECTOR  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Q2012         2SD601A         TRANSISTOR         1           Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           05         Q2106-         2SD601A         TRANSISTOR         4         TH-42PA50A	02 PB5 PB7 PC6458 PC64467 PC64469 PC6474 PC6480 PC6503 PC6507 PC6509, 10 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1178 Q1184 Q1200 Q2001,0	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000223 2SA207700L 2SD601A 2SD601A UN5211 UN5211 UN5211 UN5211 2SD601A 2SD601A 2SD601A	11P CONNECTOR  8P CONNECTOR  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Q2013         2SB709A         TRANSISTOR         1           Q2102-         2SB709A         TRANSISTOR         4           05         Q2106-         2SD601A         TRANSISTOR         4         TH-42PA50A	02 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6507 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1178 Q1182 Q1184 Q1200 Q2001,0 2	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000234 B3PBA0000234 UN5211 UN5211 UN5211 UN5211 UN5211 UN5211 UN5211 UN5211 2SD601A 2SD601A 2SD601A	11P CONNECTOR  BP CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1	
Q2102- 2SB709A TRANSISTOR 4 05 4 TH-42PA50A	02 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6507 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1178 Q1182 Q1184 Q1200 Q2001,0 2 Q2011	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000234 B3PBA0000234 B3PBA0000234 B3PBA0000234 UN5211 UN5211 UN5211 UN5211 UN5211 UN5211 UN5211 UN5211 2SD601A 2SD601A 2SD601A 2SD601A 2SD601A	11P CONNECTOR  BP CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1	
Q2102- 2SB709A TRANSISTOR 4 05 4 TRANSISTOR 4 TH-42PA50A	02 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6507 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1178 Q1182 Q1184 Q1200 Q2001,0 2 Q2011	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000234 B3PBA0000234 B3PBA0000234 B3PBA0000234 UN5211 UN5211 UN5211 UN5211 UN5211 UN5211 UN5211 UN5211 2SD601A 2SD601A 2SD601A 2SD601A 2SD601A	11P CONNECTOR  BP CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1	
05 Q2106- 2SD601A TRANSISTOR 4 TH-42PA50A	02 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6505 PC6507 PC6507 PC6517  Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1178 Q1182 Q1184 Q1200 Q2001,0 2 Q2011 Q2012	K1KA11AA0194 K1KA08AA0192  B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000234 B3PBA0000234 B3PBA0000234 B3PBA0000234 UN5211	11P CONNECTOR  BP CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Q2106- 2SD601A TRANSISTOR 4 TH-42PA50A	02 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6480 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1180 Q1184 Q1200 Q2001,0 2 Q2011 Q2012 Q2013	K1KA11AA0194 K1KA08AA0192  B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000234 B3PBA0000234 B3PBA0000234 B3PBA0010234 B3PBA0010234 B3PBA0100234 B3PBA010024 B3	11P CONNECTOR  BP CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
1"	02 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1180 Q1182 Q1184 Q1200 Q2011 Q2012 Q2011 Q2012 Q2013 Q2102	K1KA11AA0194 K1KA08AA0192  B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000234 B3PBA0000234 B3PBA0000234 B3PBA0010234 B3PBA0010234 B3PBA0100234 B3PBA010024 B3	11P CONNECTOR  BP CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
109	02 PB5 PB7 PC6458 PC6467 PC6469 PC6474 PC6503 PC6505 PC6507 PC6507 PC6517 Q1170 Q1172 Q1174,7 5 Q1176 Q1177 Q1178 Q1180 Q1182 Q1184 Q1200 Q2001,0 2 Q2011 Q2012 Q2013 Q2102-05	K1KA11AA0194 K1KA08AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000223 B3PBA0000233 B3PBA0000233 B3PBA0000234 B3PBA0000234 B3PBA0000224  CSA207700L CSD601A	11P CONNECTOR  8P CONNECTOR  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description	+	-
Q2300	2SC584500L	TRANSISTOR	1	
Q2301	2SD601A	TRANSISTOR	1	
Q2302	2SC584500L	TRANSISTOR	1	
Q2314- 17	2SC584500L	TRANSISTOR	4	
Q2323	2SA207700L	TRANSISTOR	1	
Q2324	2SC584500L	TRANSISTOR	1	
Q2510,1 1	2SD601A	TRANSISTOR	2	
Q2519	2SB709A	TRANSISTOR	1	
Q3002	2SB709A	TRANSISTOR	1	
Q3008	2SB709A	TRANSISTOR	1	
Q3009	2SD601A	TRANSISTOR	1	
Q3010- 15	2SB709A	TRANSISTOR	6	
Q3017,1 8	2SB709A	TRANSISTOR	2	
Q3024	2SB709A	TRANSISTOR	1	TH-42PA50H/M
Q3204-	2SD601A	TRANSISTOR	4	TH-42PA50H/M
07 Q3208-	2SB709A	TRANSISTOR	4	TH-42PA50H/M
04006	2506012	TRANSTSTOD	1	
Q4006 Q4010-	2SD601A 2SD601A	TRANSISTOR TRANSISTOR	3	1
Q4010- 12	LSDOVIA	TAMOTOTOR		<u> </u>
Q4013	2SA207700L	TRANSISTOR	1	
Q4015	2SB1218ARL	TRANSISTOR	1	
Q4016	2SA207700L	TRANSISTOR	1	
Q4068	2SD601A	TRANSISTOR	1	
24101	2SD601A	TRANSISTOR	1	
Q4103,0	2SD601A	TRANSISTOR	2	
24106,0 7	2SD601A	TRANSISTOR	2	
Q4109- 12	2SD601A	TRANSISTOR	4	
Q4301- 03	2SD601A	TRANSISTOR	3	
Q4306- 08	2SA207700L	TRANSISTOR	3	
Q4309	2SD1030	TRANSISTOR	1	
Q4310,1 1	2SD601A	TRANSISTOR	2	
Q4900	2SD601A	TRANSISTOR	1	
Q5601	B1DHDC000028	TRANSISTOR	1	
Q5602	2SC584500L	TRANSISTOR	1	
Q5603	B1DHDC000028	TRANSISTOR	1	
Q5604,0	2SC584500L	TRANSISTOR	2	
25606	B1DHDC000028	TRANSISTOR	1	
-	2SC584500L	TRANSISTOR	1	
Q5607 Q5613	<del> </del>	TRANSISTOR	1	1
Q5613 Q5614	2SC584500L 2SK3065T100	FET	1	<del> </del>
Q5641-	2SA207700L	TRANSISTOR	3	
43	2005045225	MD 3 MO TOMOS	+-	-
Q5644 Q6001-	2SC584500L B1JADN000001	TRANSISTOR TRANSISTOR	3	
03 Q6006-	B1JADN000001	TRANSISTOR	3	
08 Q6011	2SD2185	TRANSISTOR	1	+
Q6012	2SB1073001TV	TRANSISTOR	1	1
Q6012 Q6013	2SD2185	TRANSISTOR	1	1
Q6013 Q6014	2SB1073001TV	TRANSISTOR	1	
Q6014 Q6021	B1DEKM000001	TRANSISTOR	1	+
Q6021 Q6024	B1DEKM000001	TRANSISTOR	1	<del> </del>
Q6024 Q6025	2SK620	FET	1	<del> </del>
	B1DFKM000002	TRANSISTOR	2	
Q6041,4	ļ	ppm	+-	1
Q6041,4 2	002200000	FET	1	1
Q6041,4 2 Q6045	2SK326800L		-	
Q6041,4 2 Q6045 Q6046	B1DFKM000002	TRANSISTOR	1	
Q6041,4 2 Q6045 Q6046 Q6051	B1DFKM000002 2SD1263A	TRANSISTOR TRANSISTOR	1	
Q6041,4 2 Q6045 Q6046 Q6051 Q6052 Q6055,5	B1DFKM000002	TRANSISTOR		
Q6041,4 2 Q6045 Q6046 Q6051 Q6052	B1DFKM000002 2SD1263A 2SC1473A	TRANSISTOR TRANSISTOR TRANSISTOR	1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
Q6461	B1BBCJ000004	TRANSISTOR	1	
Q6462	2SB0709A	TRANSISTOR	1	
Q6463	2SD601A	TRANSISTOR	1	
Q6471	B1BBCJ000004	TRANSISTOR	1	
Q6472	2SB0709A	TRANSISTOR	1	
Q6474	2SD814A	TRANSISTOR	1	
Q6476,7	2SD601A	TRANSISTOR	2	
7				
Q6491	2SD1263A	TRANSISTOR	1	
Q6492	2SC1473A	TRANSISTOR	1	
Q6501- 05	2SK620	FET	5	
Q6511,1 2	B1DFGL000008	TRANSISTOR	2	
Q6520	2SD601A	TRANSISTOR	1	
Q6521	B1DFES000002	TRANSISTOR	1	
Q6522-	2SK400000L	FET	7	
28				
Q6530	2SB1073001TV	TRANSISTOR	1	
Q6541	2SB1073001TV	TRANSISTOR	1	
Q6542	2SK399500L	FET	1	
Q6544-	2SK399500L	FET	3	
46 Q6548	2SK399500L	FET	1	
Q6551	2SR399500L 2SD601A	TRANSISTOR	1	
	B1DEET000002	TRANSISTOR	1	
Q6552	+			
Q6553	2SB1073001TV	TRANSISTOR	1	
Q6554	2SD2185	TRANSISTOR	1	
Q6555	B1DFES000002	TRANSISTOR	1	
Q6581	2SD601A	TRANSISTOR	1	
Q6583,8 4	2SK620	FET	2	
Q6601- 03	B1JADN000001	TRANSISTOR	3	
Q6606- 08	B1JADN000001	TRANSISTOR	3	
Q6611	2SD2185	TRANSISTOR	1	
Q6612	2SB1073001TV	TRANSISTOR	1	
Q6613	2SD2185	TRANSISTOR	1	
Q6614	2SB1073001TV	TRANSISTOR	1	
Q6621	B1DEKM000001	TRANSISTOR	1	
Q6624	B1DEKM000001	TRANSISTOR	1	
Q6901	2SK620	FET	1	
Q9000,0 1	2SD601A	TRANSISTOR	2	
Q9003	B1DHCC000034	TRANSISTOR	1	
Q9004	2SB709A	TRANSISTOR	1	
Q9008,0 9	2SK2731T146	FET	2	
Q9010,1	2SD601A	TRANSISTOR	2	
Q9012,1	2SK2731T146	FET	2	
Q9020- 23	2SD601A	TRANSISTOR	4	
Q9500	2SK2731T146	FET	1	
Q9700	2SD601A	TRANSISTOR	1	
Q9701,0	B1MBCDA00002	TRANSISTOR	2	
Q9703,0	2SD601A	TRANSISTOR	2	
Q9900,0	2SD601A	TRANSISTOR	2	
-				
R001,02	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	TH-42PA50H/M
R002	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	TH-42PA50A
R003	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50A
R005	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	TH-42PA50A
R006	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	TH-42PA50A
R007	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TH-42PA50A
R008,09	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-42PA50A
R011,12	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	TH-42PA50H/M
R013,14	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-42PA50H/M
R1110,1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
<b>-</b>		M 10KOHM, J, 1/16W	-	
R1115	ERJ3GEYJ103		1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R1123	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R1125	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R1127 R1134	ERJ3GEYJ560	M 56 OHM,J,1/16W M 56 OHM,J,1/16W	1	
R1134 R1146	ERJ3GEYJ560 ERJ3GEY0R00	<u> </u>	1	
R1146 R1149	ERJ3GEYJ220	M 0 OHM, 1/16W M 22 OHM,J,1/16W	1	
R1168	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1170	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1171	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R1172	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R1173	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1175	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	
R1177	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R1178	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R1180	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1185	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1186	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R1187	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1188	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R1189	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1190-	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
97 P1100	ED ISCENODO	м 0 онм 1/16тг	1	
R1199 R1200	ERJ3GEY0R00	M 0 OHM, 1/16W M 100 OHM,J,1/16W	1	
R1200 R1201	TAJAAH0101JV ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1201	ERJ3GEYJ220	M 22 OHM, J, 1/16W	3	
04				
R1206	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1208,0	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
9				
R1212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1213	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R1214	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1215	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R1216	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1219	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1221	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1222 R1224	ERJ3GEYJ103 ERJ3GEYJ683	M 10KOHM, J, 1/16W	1	
R1225,2	ERJ3GEYJ683	M 68KOHM,J,1/16W M 68KOHM,J,1/16W	2	TH-42PA50H/M
R1227	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1228	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R1229	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1231	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R1232	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
R1233	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R1234	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1235	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R1237	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R1238	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
ln1010			<u> </u>	
R1240	EXB2HV680J	RESISTOR ARRAY	1	
R1242,4 3	ERJ3GEYJ103	м 10конм, J, 1/16W	1 2	
R1242,4 3 R1244	ERJ3GEYJ103 EXB38V680J	M 10KOHM,J,1/16W RESISTOR ARRAY	1 2 1	
R1242,4 3 R1244 R1248	ERJ3GEYJ103 EXB38V680J ERJ3GEYJ104	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W	1 2 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W	1 2 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W	1 2 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W	1 2 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEY0R00	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 0HM, J,1/16W	1 2 1 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253 R1255	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEY0R00  ERJ3GEYJ223	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 OHM, 1/16W M 22KOHM,J,1/16W	1 2 1 1 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253 R1255 R1258	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEY0R00  ERJ3GEYJ223  ERJ3GEYJ223	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 OHM, 1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W	1 2 1 1 1 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253 R1255 R1258 R1263	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEY0R00  ERJ3GEYJ223  ERJ3GEYJ223  ERJ3GEYJ23	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 OHM, 1/16W M 22KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W	1 2 1 1 1 1 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253 R1255 R1258 R1263 R1266	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYDR00  ERJ3GEYJ223  ERJ3GEYJ223  ERJ3GEYJ103  EXB2HV680J	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 OHM, 1/16W M 22KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W RESISTOR ARRAY	1 2 1 1 1 1 1 1 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253 R1255 R1258 R1266 R1267	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYDR00  ERJ3GEYJ223  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ472  ERJ3GEYJ472  ERJ3GEYJ03  EXB2HV680J  ERJ3EKF2702V	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 OHM, 1/16W M 0 OHM, J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W RESISTOR ARRAY M27.0KOHM, 1/16W	1 2 1 1 1 1 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253 R1255 R1258 R1263 R1266	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYDR00  ERJ3GEYJ223  ERJ3GEYJ223  ERJ3GEYJ103  EXB2HV680J	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 OHM, 1/16W M 22KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W RESISTOR ARRAY	1 2 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253 R1255 R1258 R1263 R1266 R1267 R1268	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYDR00  ERJ3GEYJ223  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  EXB2HV680J  ERJ3EKF2702V  TAJAAH0101JV	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 OHM, 1/16W M 0 OHM, J,1/16W M 0 10KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W RESISTOR ARRAY M27.0KOHM, 1/16W M 100 OHM,J,1/16W	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253 R1255 R1258 R1263 R1266 R1267 R1268 R1269	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYJ223  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ472  ERJ3GEYJ103  EXB2HV680J  ERJ3EKF2702V  TAJAAH0101JV  EXB2HV680J	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 OHM, 1/16W M 0 OHM, J,1/16W M 10KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W RESISTOR ARRAY M27.0KOHM, 1/16W M 100 OHM,J,1/16W RESISTOR ARRAY	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253 R1255 R1258 R1263 R1266 R1267 R1268 R1269 R1270	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYJ223  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  EXB2HV680J  ERJ3EKF2702V  TAJAAH0101JV  EXB2HV680J  ERJ3GEYJ820	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 OHM, 1/16W M 0 OHM, J,1/16W M 10KOHM,J,1/16W M 22KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W RESISTOR ARRAY M27.0KOHM, 1/16W M 100 OHM,J,1/16W RESISTOR ARRAY M 22 OHM,J,1/16W	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253 R1255 R1258 R1263 R1266 R1267 R1268 R1269 R1270 R1271 R1272,7	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYJ223  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ472  ERJ3GEYJ103  EXB2HV680J  ERJ3EKF2702V  TAJAAH0101JV  EXB2HV680J  ERJ3GEYJ820  ERJ3GEYJ820  ERJ3GEYJ820	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 OHM, 1/16W M 0 OHM, J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W RESISTOR ARRAY M27.0KOHM, 1/16W M 100 OHM,J,1/16W RESISTOR ARRAY M 20 OHM,J,1/16W M 0 OHM,J,1/16W	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A
R1242,4 3 R1244 R1248 R1249 R1250 R1251 R1253 R1255 R1258 R1263 R1266 R1267 R1268 R1267 R1271 R1272,7 3	ERJ3GEYJ103  EXB38V680J  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYJ472  ERJ3GEYJ472  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYJ103  ERJ3GEYJ103  ERJ3GEYJ103  ERJ3GEYJ103  ERJ3GEYJ820  ERJ3GEYJ820  ERJ3GEYJ820  ERJ3GEYJ820  ERJ3GEYJ820  ERJ3GEYJ820  ERJ3GEYOR00  D1HG5608A002	M 10KOHM,J,1/16W  RESISTOR ARRAY M 100KOHM,J,1/16W M 22KOHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W M 0 0HM, J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W M 10KOHM,J,1/16W RESISTOR ARRAY M27.0KOHM, 1/16W M 100 OHM,J,1/16W RESISTOR ARRAY M 100 OHM,J,1/16W RESISTOR ARRAY M 100 OHM,J,1/16W	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1280,8	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
1		·		
R1283	TAJAAH0680JV	M 68 OHM, J, 1/16W	1	
R1284 R1285,8	TAJAAH0101JV TAJAAH0680JV	M 100 OHM, J, 1/16W	1	
6	TAJAAHU68UJV	M 68 OHM,J,1/16W	2	
R1287	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1288	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R1289,9	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
0 R1291-	TAJAAH0101JV	M 100 OHM,J,1/16W	4	
94		, , , ,		
R1295	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1297	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R1301 R1302	TAJAAH0101JV ERJ3GEYJ562	M 100 OHM,J,1/16W M 5.6KOHM,J,1/16W	1	
R1302	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1305	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1306	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R1307	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R1308,0	TAJAAH0680JV	M 68 OHM,J,1/16W	2	
9 R1311	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
R1313	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1316,1	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
7	TD 706	14 10mores = 5 /5 fm	<u> </u>	
R1320 R1321	ERJ3GEYJ103 TAJAAH0101JV	M 10KOHM,J,1/16W M 100 OHM,J,1/16W	1	
R1321	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1323,2	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	2	
4				
R1326,2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1329	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1330,3	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R1332,3	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
3	210 302 10100	11 0 0111, 1, 1011	_	
R1334	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R1336,3	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1338	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R1339-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
41				
R1342 R1343,4	ERJ3GEYJ562 ERJ3GEYJ332	M 5.6KOHM, J, 1/16W	2	
4	ERUJGETUJJZ	M 3.3KOHM, J, 1/16W	_	
R1345,4	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
6 R1347,4	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
8	ERUJGETUJUZ	M 5.0KOHM,0,1/10W	_	
R1351	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R1355	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R1359,6	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R1361	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1365,6	EXB2HV680J	RESISTOR ARRAY	2	
6 P1372-	ED 130EV 1103	M 10KOUM T 1/10W	2	
R1372- 74	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R1380,8	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
1 R1384	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1389	ERJ3GEYJ153	M 15KOHM, J, 1/16W	1	
R1390	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2005	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2006- 11	ERJ6GEYJ223	M 22KOHM,J,1/10W	6	
R2012	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2013,1	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
4 R2015,1	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
6 6	EV0.36E10331	OO ORM,U,1/10W		
R2042	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R2043	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2044	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	

Ref. No.		i e		
	Part No.	Part Name & Description	Pcs	Remarks
R2045,4	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2047	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2048	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R2049,5	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
0				
R2053	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2054	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2113	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2124,2 5	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2126,2 7	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R2128,2 9	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2130,3 1	ERJ3GEYJ103	м 10КОНМ,J,1/16W	2	
R2132	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R2133	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2137	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R2138	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2147	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2148,4 9	ERJ3GEYJ273	M 27KOHM,J,1/16W	2	
R2151	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2152	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R2153	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2154	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R2155,5 6	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2158	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2164	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2165,6 6	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2167	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2168,6 9	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	2	
R2172,7 3	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2180	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R2182,8 3	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2184- 87	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2190	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	TH-42PA50A
	ERJ3GEYJ221 ERJ3GEYJ221	M 220 OHM,J,1/16W M 220 OHM,J,1/16W	1 2	TH-42PA50A
R2192,9			<del>                                     </del>	TH-42PA50A
R2192,9 3 R2195,9	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	TH-42PA50A
R2192,9 3 R2195,9 6	ERJ3GEYJ221 J0JCC0000241	M 220 OHM,J,1/16W CHIP INDUCTOR	2	TH-42PA50A
R2192,9 3 R2195,9 6 R2197	ERJ3GEYJ221 J0JCC0000241 ERJ3GEYJ471	M 220 OHM,J,1/16W CHIP INDUCTOR M 470 OHM,J,1/16W	2 2 1	TH-42PA50A TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W	2 2 1 1 2 1	
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6ENF1601	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W	2 2 1 1 2 1	
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6ENF1601  TAJAAH0101JV	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W	2 2 1 1 2 1 1 1	TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6ENF1601  TAJAAH0101JV  ERJ6GEYJ561	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/10W	2 2 1 1 2 1 1 1	TH-42PA50A TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6ENF1601  TAJAAH0101JV  ERJ6GEYJ561  ERJ3GEYJ102	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/10W  M 1KOHM,J,1/16W	2 2 1 1 2 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6ENF1601  TAJAAH0101JV  ERJ6GEYJ561  ERJ3GEYJ102  ERJ6GEYJ471	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/10W  M 1KOHM,J,1/10W  M 470 OHM,J,1/10W	2 2 1 1 2 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A TH-42PA50A TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6ENF1601  TAJAAH0101JV  ERJ6GEYJ561  ERJ3GEYJ102  ERJ6GEYJ471  ERJ3GEYJ332	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/10W  M 1KOHM,J,1/16W  M 470 OHM,J,1/10W  M 3.3KOHM,J,1/16W	2 2 1 1 2 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A TH-42PA50A TH-42PA50A TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2208 R2209 R2210	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6ENF1601  TAJAAH0101JV  ERJ6GEYJ561  ERJ3GEYJ102  ERJ6GEYJ471  ERJ3GEYJ332  ERJ6GEYJ681	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/10W  M 1KOHM,J,1/10W  M 470 OHM,J,1/10W  M 3.3KOHM,J,1/16W  M 680 OHM,J,1/10W	2 2 1 1 2 1 1 1 1 1 1 1 1	TH-42PA50A TH-42PA50A TH-42PA50A TH-42PA50A TH-42PA50A TH-42PA50A TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2210 R2210 R2211	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6ENF1601  TAJAAH0101JV  ERJ6GEYJ561  ERJ3GEYJ102  ERJ6GEYJ471  ERJ3GEYJ332  ERJ6GEYJ681  ERJ3GEYJ561	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/10W  M 470 OHM,J,1/10W  M 3.3KOHM,J,1/16W  M 680 OHM,J,1/10W  M 560 OHM,J,1/10W	2 2 1 1 2 1 1 1 1 1 1 1 1 1	TH-42PA50A  TH-42PA50A  TH-42PA50A  TH-42PA50A  TH-42PA50A  TH-42PA50A  TH-42PA50A  TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2210 R2211 R2213	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6GEYJ221  ERJ6GEYJ561  ERJ3GEYJ102  ERJ6GEYJ471  ERJ3GEYJ332  ERJ6GEYJ681  ERJ3GEYJ103	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/16W  M 470 OHM,J,1/16W  M 3.3KOHM,J,1/16W  M 680 OHM,J,1/10W  M 560 OHM,J,1/16W  M 10KOHM,J,1/16W	2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A  TH-42PA50A  TH-42PA50A  TH-42PA50A  TH-42PA50A  TH-42PA50A  TH-42PA50A  TH-42PA50A  TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2210 R2211 R2213 R2214	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6ENF1601  TAJAAH0101JV  ERJ6GEYJ561  ERJ3GEYJ102  ERJ6GEYJ471  ERJ3GEYJ332  ERJ6GEYJ681  ERJ3GEYJ103  ERJ3GEYJ103  ERJ3GEYJ332	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/16W  M 470 OHM,J,1/16W  M 3.3KOHM,J,1/16W  M 560 OHM,J,1/16W  M 10KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W	2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2210 R2211 R2213 R2214 R2215	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6EYJ221  ERJ6GEYJ561  ERJ3GEYJ102  ERJ6GEYJ471  ERJ3GEYJ332  ERJ6GEYJ681  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ103  ERJ3GEYJ332  ERJ6GEYJ332  ERJ6GEYJ332	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/16W  M 470 OHM,J,1/16W  M 3.3KOHM,J,1/16W  M 680 OHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W	2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2210 R2211 R2213 R2214 R2215 R2216	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6EYJ221  ERJ6EYJ561  ERJ3GEYJ102  ERJ6GEYJ471  ERJ3GEYJ332  ERJ6GEYJ681  ERJ3GEYJ103  ERJ3GEYJ103  ERJ3GEYJ332  ERJ3GEYJ332  ERJ3GEYJ332  ERJ3GEYJ103  ERJ3GEYJ331  ERJ3GEYJ331	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 100 OHM,J,1/16W  M 470 OHM,J,1/10W  M 470 OHM,J,1/10W  M 3.3KOHM,J,1/10W  M 560 OHM,J,1/16W  M 30 OHM,J,1/16W  M 33KOHM,J,1/16W  M 33KOHM,J,1/16W  M 10KOHM,J,1/16W  M 33KOHM,J,1/16W  M 10KOHM,J,1/16W	2 2 1 1 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A  TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2211 R2213 R2214 R2215 R2216 R2217 R2224,2	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ6EYJ221  ERJ6GEYJ561  ERJ3GEYJ102  ERJ6GEYJ471  ERJ3GEYJ332  ERJ6GEYJ681  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ103  ERJ3GEYJ332  ERJ6GEYJ332  ERJ6GEYJ332	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/16W  M 470 OHM,J,1/16W  M 3.3KOHM,J,1/16W  M 680 OHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W	2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2210 R2211 R2213 R2214 R2215 R2216 R2217 R2224,2	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ561  ERJ3GEYJ471  ERJ3GEYJ471  ERJ3GEYJ332  ERJ3GEYJ332  ERJ3GEYJ332  ERJ3GEYJ332  ERJ3GEYJ332  ERJ3GEYJ332  ERJ3GEYJ332  ERJ3GEYJ331  ERJ3GEYJ331  ERJ3GEYJ02	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 120 OHM,J,1/16W  M 16KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/10W  M 1KOHM,J,1/10W  M 3.3KOHM,J,1/10W  M 680 OHM,J,1/10W  M 10KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 3.7KOHM,J,1/16W  M 3.7KOHM,J,1/16W  M 3.7KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W	2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A  TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2211 R2213 R2214 R2215 R2216 R2217 R2224,2 5 R2302	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ261  ERJ3GEYJ471  ERJ3GEYJ471  ERJ3GEYJ332  ERJ3GEYJ332	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 120 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 1.00 OHM,J,1/16W  M 560 OHM,J,1/10W  M 1KOHM,J,1/16W  M 470 OHM,J,1/10W  M 3.3KOHM,J,1/16W  M 10KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 3.0 OHM,J,1/16W  M 3.0 OHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 22KOHM,J,1/16W	2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A  TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2210 R2211 R2213 R2214 R2215 R2216 R2217 R2224,2 5 R2302 R2303	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ561  ERJ3GEYJ102  ERJ3GEYJ471  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ103  ERJ3GEYJ103  ERJ3GEYJ562  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ561	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 1.00 OHM,J,1/16W  M 1.00 OHM,J,1/10W  M 1KOHM,J,1/10W  M 470 OHM,J,1/10W  M 470 OHM,J,1/10W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 22KOHM,J,1/16W  M 22KOHM,J,1/16W  M 5.6KOHM,J,1/16W	2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A  TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2210 R2211 R2213 R2214 R2215 R2216 R2217 R2224,2 5 R2302 R2303 R2304	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ561  ERJ3GEYJ102  ERJ3GEYJ471  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ103  ERJ3GEYJ561  ERJ3GEYJ103  ERJ3GEYJ102  ERJ3GEYJ103  ERJ3GEYJ104  ERJ3GEYJ104	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 1560 OHM,J,1/10W  M 1KOHM,J,1/16W  M 470 OHM,J,1/10W  M 470 OHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10OKOHM,J,1/16W  M 10OKOHM,J,1/16W  M 100KOHM,J,1/16W  M 100KOHM,J,1/16W  M 100KOHM,J,1/16W	2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A  TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2210 R2211 R2213 R2214 R2215 R2216 R2217 R2224,2 5 R2302 R2303 R2304 R2305	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ102  ERJ3GEYJ471  ERJ3GEYJ332  ERJ3GEYJ561  ERJ3GEYJ332  ERJ3GEYJ103  ERJ3GEYJ103  ERJ3GEYJ103  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ104  ERJ3GEYJ104  ERJ3GEYJ104	M 220 OHM, J, 1/16W  CHIP INDUCTOR  M 470 OHM, J, 1/16W  M1.78KOHM, 1/10W  M 220 OHM, J, 1/16W  M 220 OHM, J, 1/16W  M 1.6KOHM, 1/10W  M 1.6KOHM, 1/10W  M 1.6KOHM, J, 1/16W  M 560 OHM, J, 1/16W  M 470 OHM, J, 1/16W  M 3.3KOHM, J, 1/16W  M 3.3KOHM, J, 1/16W  M 10KOHM, J, 1/16W  M 3.3KOHM, J, 1/16W  M 10KOHM, J, 1/16W  M 3.3KOHM, J, 1/16W  M 10KOHM, J, 1/16W  M 10KOHM, J, 1/16W  M 10KOHM, J, 1/16W  M 22KOHM, J, 1/16W  M 22KOHM, J, 1/16W  M 100KOHM, J, 1/16W  M 100KOHM, J, 1/16W  M 100KOHM, J, 1/16W  M 100KOHM, J, 1/16W  M 470 OHM, J, 1/16W  M 470 OHM, J, 1/16W	2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A  TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2210 R2211 R2213 R2214 R2215 R2216 R2217 R2224,2 5 R2302 R2303 R2304 R2305 R2306	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ102  ERJ3GEYJ471  ERJ3GEYJ332  ERJ3GEYJ563  ERJ3GEYJ563  ERJ3GEYJ103  ERJ3GEYJ102  ERJ3GEYJ102  ERJ3GEYJ102  ERJ3GEYJ562  ERJ3GEYJ223  ERJ3GEYJ562  ERJ3GEYJ104  ERJ3GEYJ104  ERJ3GEYJ821	M 220 OHM,J,1/16W  CHIP INDUCTOR  M 470 OHM,J,1/16W  M1.78KOHM, 1/10W  M 220 OHM,J,1/16W  M 220 OHM,J,1/16W  M 1.6KOHM, 1/10W  M 100 OHM,J,1/16W  M 560 OHM,J,1/16W  M 470 OHM,J,1/16W  M 680 OHM,J,1/16W  M 680 OHM,J,1/16W  M 10KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 3.3KOHM,J,1/16W  M 10KOHM,J,1/16W  M 22KOHM,J,1/16W  M 100KOHM,J,1/16W  M 100KOHM,J,1/16W  M 470 OHM,J,1/16W  M 820 OHM,J,1/10W	2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A  TH-42PA50A
R2192,9 3 R2195,9 6 R2197 R2198 R2199 R2200 R2201 R2202 R2204 R2205 R2208 R2209 R2210 R2211 R2213 R2214 R2215 R2216 R2217 R2224,2 5 R2302 R2303 R2304 R2305	ERJ3GEYJ221  J0JCC0000241  ERJ3GEYJ471  ERJ6ENF1781  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ221  ERJ3GEYJ561  ERJ3GEYJ561  ERJ3GEYJ102  ERJ3GEYJ471  ERJ3GEYJ332  ERJ3GEYJ561  ERJ3GEYJ332  ERJ3GEYJ103  ERJ3GEYJ103  ERJ3GEYJ103  ERJ3GEYJ104  ERJ3GEYJ223  ERJ3GEYJ104  ERJ3GEYJ104  ERJ3GEYJ104	M 220 OHM, J, 1/16W  CHIP INDUCTOR  M 470 OHM, J, 1/16W  M1.78KOHM, 1/10W  M 220 OHM, J, 1/16W  M 220 OHM, J, 1/16W  M 1.6KOHM, 1/10W  M 1.6KOHM, 1/10W  M 1.6KOHM, J, 1/16W  M 560 OHM, J, 1/16W  M 470 OHM, J, 1/16W  M 3.3KOHM, J, 1/16W  M 3.3KOHM, J, 1/16W  M 10KOHM, J, 1/16W  M 3.3KOHM, J, 1/16W  M 10KOHM, J, 1/16W  M 3.3KOHM, J, 1/16W  M 10KOHM, J, 1/16W  M 10KOHM, J, 1/16W  M 10KOHM, J, 1/16W  M 22KOHM, J, 1/16W  M 22KOHM, J, 1/16W  M 100KOHM, J, 1/16W  M 100KOHM, J, 1/16W  M 100KOHM, J, 1/16W  M 100KOHM, J, 1/16W  M 470 OHM, J, 1/16W  M 470 OHM, J, 1/16W	2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A  TH-42PA50A

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	Part No.	Description	FCS	Remarks
R2310	ERJ3GEYJ184	M 180KOHM,J,1/16W	1	
R2311	ERJ12YJ821	M 820 OHM,J, 1/2W	1	
	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
3	EROSGETOTOS	I TOROIM, 0, 1, 10W	-	
R2314,1	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
5				
R2320	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2321	ERJ3GEYJ393	M 39KOHM, J, 1/16W	1	
R2322	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2323	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2324	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2325	ERJ3GEYJ913	M 91KOHM, J, 1/16W	1	
R2326	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2328	ERJ3GEYJ104	M 100 OHM, 5, 1/16W	1	
R2329	ERJ3GEYJ393		1	
R2329	ERJ3GEYJ563	M 39KOHM, J, 1/16W	1	
		M 56KOHM, J, 1/16W		
R2331	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R2332	ERJ3GEYJ913	M 91KOHM, J, 1/16W	1	
R2335	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2336	ERJ3GEYJ393	M 39KOHM, J, 1/16W	1	
R2337	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R2338	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2339	ERJ3GEYJ913	M 91KOHM,J,1/16W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
3				
R2344	ERJ3GEYJ913	M 91KOHM,J,1/16W	1	
R2345,4	ERJ3GEYJ563	M 56KOHM,J,1/16W	2	
6				
R2377,7	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
8				
R2381,8	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
	ED TECEVITOR	M 170UM T 1/10W	2	
R2388,8	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R2390	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R2391	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2392	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
			1	
R2393	ERJ3GEYJ103	M 10KOHM, J, 1/16W		
R2394	ERJ3GEYJ203	M 20KOHM, J, 1/16W	1	
R2395,9	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2397,9	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
8	ERUSGEIU475	H 47KOHM, 5, 1710W	_	
R2412	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2414	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
8	EROSGETOTOS	I TOROIM, 0, 1, 10W	-	
R2444,4	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
5			-	
R2448,4	ERJ6GEYJ510	M 51 OHM,J,1/10W	2	
9				
R2450	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2451,5	ERJ6GEYJ510	M 51 OHM,J,1/10W	2	
2				
R2453	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2460	ERJ6ENF1373	м 137конм, 1/10w	1	
R2461	ERJ6ENF1103	м 110конм, 1/10w	1	
R2464,6	ERJ6GEYJ120	M 12 OHM,J,1/10W	2	
5				
R2468,6	ERJ6GEYJ112	M 1.1KOHM,J,1/10W	2	
9				
R2488,8	ERJ6GEYJ120	M 12 OHM,J,1/10W	2	
9	ED 130===1=0	M A Trome = 1/10=	-	
R2499	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2516	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2517	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R2520	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R2524	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2525	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R2526	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R2542	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2545	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2550	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2553	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2557	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	

	T	T	Γ_	T
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3001- 10	ERJ6ENF75R0	M 75 OHM, 1/10W	10	
R3012	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3020	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R3021,2 2	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3027	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3039	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R3044,4	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3047	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3048	ERJ3GEYJ152	M 1.5KOHM, J, 1/16W	1	
R3049- 51	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R3053	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R3054	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50H/M
R3054	ERJ3EKF4700	M 470 OHM, 1/16W	2	TH-42PA50A
R3055	ERJ3EKF5600	M 560 OHM, 1/16W	1	
R3057,5 8	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3059	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3064	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3065	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3067	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3069	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3071	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R3074,7	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R3076	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3086	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3087	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3089,9	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R3092	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3094,9	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
5 R3099-	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
02				
R3115- 18	TAJAAH0101JV	M 100 OHM,J,1/16W	4	
R3119,2 0	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3121	ERJ3EKF1000	M 100 OHM, 1/16W	1	
R3122	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R3123	ERJ3EKF82R0	M 82 OHM, 1/16W	1	
R3124	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R3125	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R3126	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R3127	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R3128	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R3129	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R3130	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	TH-42PA50H/M
R3131	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50H/M
R3132	ERJ3EKF5600	M 560 OHM, 1/16W	1	TH-42PA50H/M
R3133	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	TH-42PA50H/M
R3134	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R3135	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3138	ERJ3EKF82R0	M 82 OHM, 1/16W	1	
R3139	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R3140	ERJ3EKF1000	M 100 OHM, 1/16W	1	
R3141	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R3142	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	1	
R3152,5 3	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R3158	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R3159	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R3164	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R3166,6 7	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R3206	TAJAAH0101JV	M 100 OHM,J,1/16W	1	TH-42PA50H/M
R3206	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50A
R3213- 22	ERJ3GEY0R00	M 0 OHM, 1/16W	10	
R3224- 29	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3237	TAJAAH0101JV	M 100 OHM,J,1/16W	1	TH-42PA50H/M

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3238-	ERJ3GEYJ103	M 10KOHM, J, 1/16W	8	TH-42PA50H/M
R3246	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	TH-42PA50H/M
R3247	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50H/M
R3249	ERJ6GEYJ561	M 560 OHM, J, 1/10W	1	TH-42PA50H/M
R3250,5	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3252,5	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	TH-42PA50H/M
R3252	ERJ3GEY0R00	M 0 OHM, 1/16W	3	TH-42PA50A
R3254	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TH-42PA50H/M
R3255	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	TH-42PA50H/M
R3256	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50H/M
R3257	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	TH-42PA50H/M
R3258-	ERJ3GEY0R00	M 0 OHM, 1/16W	7	TH-42PA50H/M
64 R3320	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3323,2	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
4			7	
R3401-	ERJ6GEY0R00	M 0 OHM, 1/10W		
R3408,0	ERJ3GEYJ361	M 360 OHM,J,1/16W	2	
R3750	ERJ6ENF6802	M 68KOHM, 1/10W	1	
R3751	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R3752	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3753	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
R3754	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R4001	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4014	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R4016,1 7	ERJ3EKF5760	M 576 OHM, 1/16W	2	
R4027	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R4029,3 0	ERJ3EKF1581	M1.58KOHM, 1/10W	2	
R4031	ERJ3EKF4220	M 422 OHM, 1/10W	1	
R4033	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4035,3	ERJ3EKF3001	м ЗКОНМ, 1/16W	2	
R4037	ERJ3EKF5600	M 560 OHM, 1/16W	1	
R4039	ERJ3EKF4220	M 422 OHM, 1/10W	1	
R4041	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R4043,4 4	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R4045	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4046	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R4047	ERJ3EKF5600	M 560 OHM, 1/16W	1	
R4049	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4050	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R4051,5	ERJ3GEY0R00	м 0 ОНМ, 1/16W	2	
R4053	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R4054	ERJ3EKF1600	M 160 OHM, 1/16W	1	
R4055	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4056,5	ERJ6GEYJ102	м 1конм, J, 1/10w	2	
R4059	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R4060	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4062	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4064	ERJ3EKF1371	M 13.7 OHM, 1/16W	1	
R4068	ERJ3EKF1691	M1.69KOHM, 1/16W	1	
R4069- 72	ERJ3GEYJ220	M 22 OHM,J,1/16W	4	
R4075	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4076,7	EXB38V220J	RESISTOR ARRAY	2	
R4078	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4079-	EXB38V220J	RESISTOR ARRAY	3	
R4082- 84	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R4086-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4091- 95	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4100	ERJ3GEYJ183	м 18конм, J, 1/16W	1	

	T	I		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4101	ERJ3GEYJ822	M 8.2KOHM, J, 1/16W	1	
R4102	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R4103	ERJ3GEYJ822	M 8.2KOHM, J, 1/16W	1	
R4104	ERJ3GEYJ183	м 18KOHM,J,1/16W	1	
R4106	ERJ3GEYJ822	M 8.2KOHM, J, 1/16W	1	
R4107- 09	ERJ3GEYJ330	M 33 OHM,J,1/16W	3	
R4110	ERJ3GEYJ751	м 750 ОНМ,J,1/16W	1	
R4111	ERJ3EKF5601	м 5.6KOHM, 1/16W	1	
R4112	ERJ3GEYJ751	M 750 OHM,J,1/16W	1	
R4113	ERJ3EKF5601	M 5.6KOHM, 1/16W	1	
R4114	ERJ3GEYJ751	M 750 OHM, J, 1/16W	1	
R4115 R4117	ERJ3EKF5601 ERJ6ENF5600	M 5.6KOHM, 1/16W M 560 OHM, 1/10W	1	
R4117	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4120	ERJ6ENF5600	M 560 OHM, 1/10W	1	
R4123	ERJ6ENF5600	M 560 OHM, 1/10W	1	
R4125-	ERJ6GEYJ471	M 470 OHM,J,1/10W	3	
27	ED TOCEVODOO	M O OUM 1/16W	1	
R4128 R4130	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	1	
R4130	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4134-	TAJAAH0680JV	M 68 OHM, J, 1/16W	3	
36				
R4137- 39	ERJ3GEYJ330	M 33 OHM,J,1/16W	3	
R4140	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4143	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4144- 46	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	
R4147- 49	ERJ3GEYJ153	м 15КОНМ, J, 1/16W	3	
R4150	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4151,5 2	ERJ3EKF2200	M 220 OHM, 1/16W	2	
R4153	ERJ3EKF1020	M 102 OHM, 1/16W	1	
R4154	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4155	ERJ3GEYJ103	M 10KOHM,J,1/16W M 22 OHM,J,1/16W	2	
R4157,5 8	ERJ3GEYJ220	M 22 OHM, 3, 1/16W		
R4159	ERJ3EKF1200	M 120 OHM, 1/16W	1	
R4160 R4161	ERJ3EKF1020 ERJ3EKF1200	M 102 OHM, 1/16W	1	
R4163	ERJ3GEY0R00	M 120 OHM, 1/16W M 0 OHM, 1/16W	1	
R4165		M 68 OHM, J, 1/16W	1	
R4167	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4169	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4173	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R4174,7 5	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4177	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R4182	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4184	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R4186	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4188	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4194- 97	TAJAAH0680JV	M 68 OHM,J,1/16W	4	
R4199	ERJ3EKF1200	M 120 OHM, 1/16W	1	
R4203	ERJ3EKF1020	M 102 OHM, 1/16W	1	
R4204	ERJ3GEYJ510	M 51 OHM,J,1/16W	1	
R4207	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R4208	ERJ3GEYJ510	M 51 OHM, J, 1/16W	1	
R4209 R4210	ERJ3EKF2200 TAJAAH0101JV	M 220 OHM, 1/16W M 100 OHM,J,1/16W	1	
R4210 R4211	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4228	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4236- 38	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4244	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4249	EXB38V680J	RESISTOR ARRAY	1	
R4253	EXB38V680J	RESISTOR ARRAY	1	
R4255	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4259	EXB38V680J	RESISTOR ARRAY	1	
R4301	ERJ3GEYJ361 ERJ3GEYJ181	M 360 OHM,J,1/16W M 180 OHM,J,1/16W	1	
R4303	IDTO JGE IO TO T	Tar TOO OURI, O'T/TOM	1 +	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R4305	ERJ3GEYJ181	M 180 OHM,J,1/16W	1	
	ERJ6GEYJ361	M 360 OHM,J,1/10W	1	
R4308,0 9	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R4315	ERJ3EKF8450	M 845 OHM, 1/16W	1	
9	ERJ3EKF4700	M 470 OHM, 1/16W	2	
R4320,2 1	ERJ3EKF3601	м 3.6KOHM, 1/16W	2	
R4325	ERJ3EKF1331	M13.3KOHM, 1/16W	1	
R4326,2 7	ERJ6GEYJ821	M 820 OHM,J,1/10W	2	
R4328	ERJ6GEYJ681	M 680 OHM,J,1/10W	1	
R4329- 31	ERJ3GEYJ330	M 33 OHM,J,1/16W	3	
R4332	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R4333	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4334,3	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	
R4336- 41	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R4342- 44	ERJ3EKF33R0	м 33 ОНМ, 1/16W	3	
R4345	ERJ3EKF1401	м 1.4KOHM, 1/16W	1	
R4346- 48	ERJ3EKF33R0	M 33 OHM, 1/16W	3	
R4349	ERJ3EKF2701	M 2.7KOHM, 1/16W	1	
R4350	ERJ3EKF4700	M 470 OHM, 1/16W	1	
R4351- 53	ERJ3EKF1500	M 150 OHM, 1/16W	3	
R4354	ERJ3EKF1001	м 1конм, 1/16w	1	
R4355- 59	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4360	ERJ3GEYJ911	M 910 OHM,J,1/16W	1	
R4361,6 2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4363	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4364,6	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4367	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4368,6	ERJ3GEYJ560	M 56 OHM,J,1/16W	2	
R4370	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R4372	D1HG5608A002	NETWORK RESISTER	1	
R4373,7	EXB38V560J	RESISTOR ARRAY	2	
R4379,8 0	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4381- 83	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R4501	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R4502	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4503	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R4504	ERJ3EKF1800	M 180 OHM, 1/16W	1	
R4505 R4506	ERJ3EKF2001 ERJ3EKF4302	M 2KOHM, 1/16W M 43KOHM, 1/16W	1	
R4508,0	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4510-	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R4522	ERJ3GEYJ750	M 75 OHM,J,1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4525	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4526	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R4527	ERJ3GEYJ393	M 39KOHM, J, 1/16W	1	
1.	ERJ3EKF1001 ERJ3GEYJ103	M 1KOHM, 1/16W M 10KOHM, J, 1/16W	2	
0 R4531,3	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
2 R4533	ERJ3EKF9100	M 910 OHM, 1/16W	1	
112000		JIO JIM, I/IOW		

Ref.	Part No.	Part Name &	Pcs	Remarks
No. R4534,3	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
5 R4575,7	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
6 R4577,7	TAJAAH0680JV	M 68 OHM,J,1/16W	2	
8 R4583-	TAJAAH0680JV	M 68 OHM, J, 1/16W	21	
03	EXB38V680J			
R4604- 06		RESISTOR ARRAY	3	
R4609 R4610-	ERJ3GEY0R00 TAJAAH0680JV	M 0 OHM, 1/16W M 68 OHM, J, 1/16W	4	
13 R4614-	EXB2HV680J	RESISTOR ARRAY	4	
17 R4618	EXB38V680J	RESISTOR ARRAY	1	
R4619	EXB2HV680J	RESISTOR ARRAY	1	
R4620	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4659	TAJAAH0680JV		1	
		M 68 OHM, J, 1/16W		
R4661	TAJAAH0680JV	M 68 OHM, J, 1/16W	1	
R4662,6	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4664	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4671	EXB38V680J	RESISTOR ARRAY	1	
R4672	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4701,0 2	ERJ3EKF3002	M 30KOHM, 1/16W	2	
R4704,0 5	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
R4706- 10	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4756- 58	ERJ3GEYJ330	M 33 OHM, J, 1/16W	3	
R4759	ERJ3GEYJ510	M 51 OHM, J, 1/16W	1	
R4760	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4762	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4763	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4766	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4768	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4769	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R4802	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4805 R4807,0	ERJ3GEYJ103 ERJ3GEYJ223	M 10KOHM,J,1/16W M 22KOHM,J,1/16W	2	
8				
R4810	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4821- 23	EXB38VR000	RESISTOR ARRAY	3	
R4834	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4851	ERJ3GEYJ821	M 820 OHM,J,1/16W	1	
R4884	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4887,8 8	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4897	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4898	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PA50H/M
R4920,2 1	J0JCC0000241	CHIP INDUCTOR	2	
R4922- 26	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4927	J0JCC0000241	CHIP INDUCTOR	1	
R4928- 34	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
R4936- 42	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
R4943	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R4944,4 5	ERJ3GEYJ473	м 47конм, J, 1/16W	2	
R4946	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4947	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4948,4 9	ERJ3EKF3002	м 30конм, 1/16w	2	
R4950	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4951	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4952	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R4954,5	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R5601	ERJ6ENF4532	M4.53KOHM, 1/10W	1	
R5603	ERJ6ENF2550	M 255 OHM, 1/10W	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R5605	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R5606	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R5607	ERJ6ENF1871	M1.87KOHM, 1/10W	1	
R5609	ERJ6ENF1871	M1.87KOHM, 1/10W	1	
R5610	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R5611	ERJ6ENF8202	M 82KOHM, 1/10W	1	
R5612 R5615,1	ERJ6ENF1652 ERJ6GEYJ223	M16.5KOHM, 1/10W M 22KOHM,J,1/10W	2	
6	ERU OGE 10223	M 22ROHM, 3, 1/10W		
R5617,1 8	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R5621	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5623,2 4	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R5625- 27	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	3	
R5630	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5632	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5633	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5634	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5635	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5636	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R5637,3	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R5639	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5640	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R5641	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5642	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5643	ERJ6GEYJ681	M 680 OHM, J, 1/10W	1	
R5644	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5645,4	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R5647	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5648	ERJ6GEYJ392	M 3.9KOHM, J, 1/10W	1	
R5649	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R5650	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R5652	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5653- 56	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R5657,5 8	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R5660	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5662	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5670	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5672	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5675	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5680	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5692	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5693 R5694,9	ERJ6GEYJ333 ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
5 D5606	ED TECEVITEO	M 1 EKOUM T 1/10r	1	
R5696 R5815	ERJ6GEYJ152 ERJ6ENF3900	M 1.5KOHM,J,1/10W M 390 OHM, 1/10W	1	
R5819	ERJ6ENF2941	M2.94KOHM, 1/10W	1	
R5820	ERX3FJSR22D	M 2.2 OHM, J, 3W	1	
R6001	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6002- 05	ERJ6GEYJ151	M 150 OHM,J,1/10W	4	
R6006,0	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
7 R6008,0	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
9 R6011-	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
16 R6019-	ERJ14YJ150U	M 15 OHM, J,1/4W	4	
22 P6023	ED.TECEVITAS	м 10корм т 1/10гл	1	
R6023 R6024	ERJ6GEYJ103 ERJ6GEYJ100	M 10KOHM,J,1/10W M 10 OHM,J,1/10W	1	
R6024	ERJ6GEYJ103	M 10 OHM, J, 1/10W M 10KOHM, J, 1/10W	1	
R6025	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6027,2	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R6029-	ERJ6GEYJ103	M 10KOHM,J,1/10W	3	
31 R6033	ERJ14YJ204	M 200KOHM, J,1/4W	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No. R6034,3	ERJ14YJ150U	Description M 15 OHM, J,1/4W	2	
5				
R6041,4 2	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
R6049,5 0	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
R6055	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6056	ERJ6GEYJ104	м 100КОНМ,J,1/10W	1	
R6057	ERG1FJS470D	M 47 OHM, J, 1W	1	
R6059,6	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
0				
R6061	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R6062,6 3	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6067	ERG1FJS472D	M 4.7KOHM, J, 1W	1	
R6068	ERG2FJS123D	м 12КОНМ, J, 2W	1	
R6069,7 0	ERJ6ENF2202	M 2.2KOHM, 1/10W	2	
R6073	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6074	ERJ6ENF2402	M 24KOHM, 1/10W	1	
R6076	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6077,7 8	ERX3FJSR22D	M 2.2 OHM, J, 3W	2	
R6079,8 0	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6081	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6082,8	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
3				
R6084	ERJ14YJ224	M 220KOHM, J,1/4W	1	
R6085,8 6	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
R6087	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6088	ERJ6GEYJ103	м 10конм, J, 1/10W	1	
R6089	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6090	ERJ14YJ181U	M 181 OHM, J,1/4W	1	
R6091	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6092	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6101	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R6102	EXB38V470J	RESISTOR ARRAY	1	
R6104	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
KOTO4	EKU JGE I U 4 / Z	M 4./KOHM, U, I/IOW	+	
D610E	EVD 2017472 T	DECTOROR ADDAY		
R6105	EXB38V472J	RESISTOR ARRAY	1	
R6107	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R6107 R6110	TAJAAH0470JV ERJ3GEYJ472	M 47 OHM, J, 1/16W M 4.7KOHM, J, 1/16W	1	
R6107 R6110 R6118,1	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R6107 R6110 R6118,1	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W	1 2	
R6107 R6110 R6118,1 9 R6120	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501	M 47 ОНМ, J, 1/16W M 4.7КОНМ, J, 1/16W M 39КОНМ, 1/10W M 7.5КОНМ, 1/10W	1 1 2	
R6107 R6110 R6118,1 9 R6120 R6121	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W	1 1 2 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W	1 1 2 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W	1 1 2 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 2.2KOHM,J,1/10W	1 1 2 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 2.2KOHM,J,1/10W M 1.5KOHM,J,1/10W	1 1 2 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ000	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 2.2KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W	1 1 2 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ122 ERJ6GEYJ152 ERJ6GEYJ000 ERJ6GEY0R00	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W	1 1 2 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ000	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 2.2KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W	1 1 2 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ122 ERJ6GEYJ152 ERJ6GEYJ000 ERJ6GEY0R00	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W	1 1 2 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ103	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM,J,1/10W M 0.0HM,J,1/10W M 0.0HM,J,1/10W M 0.0HM,J,1/10W	1 1 2 1 1 1 1 1 1 1 1 2	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ153 ERJ6GEYJ103 ERJ6GEYJ103	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 1.0KOHM,J,1/10W M 1.0KOHM,J,1/10W	1 1 2 1 1 1 1 1 1 1 2	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ153 ERJ6GEYJ103 ERJ6GEYJ103	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 0.0HM,J,1/10W M 1.0KOHM,J,1/10W M 1.0KOHM,J,1/10W M 1.0KOHM,J,1/10W	1 1 2 1 1 1 1 1 1 1 2	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ153 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ563	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM,J,1/10W M 0.0HM, 1/10W M 1.5KOHM,J,1/10W M 0.0HM,J,1/10W M 1.0KOHM,J,1/10W M 1.0KOHM,J,1/10W M 5.6KOHM,J,1/10W M 5.6KOHM,J,1/10W	1 1 2 1 1 1 1 1 1 1 2	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ222 ERJ6GEYJ152 ERJ6GEYJ000 ERJ6GEYJ000 ERJ6GEYJ000 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 56KOHM,J,1/10W M 56KOHM,J,1/10W M 10KOHM,J,1/10W	1 1 2 1 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5 5 R6456	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ153 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 56KOHM,J,1/10W M 10KOHM,J,1/10W	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ222 ERJ6GEYJ152 ERJ6GEYJ000 ERJ6GEYJ000 ERJ6GEYJ000 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 56KOHM,J,1/10W M 56KOHM,J,1/10W M 10KOHM,J,1/10W	1 1 2 1 1 1 1 1 1 1 1 2 1 1 1 1 1 2 1 1 1 2 1 1 1 2 1 1 1 2 1 1 1 1 1 2 1 1 1 1 2 1 1 1 1 1 2 1 2 1 1 1 1 2 1 2 1 2 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 2 1 2 2 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6456 R6457,5 8 R6456 R6457,5 8	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ553 ERJ6GEYJ553 ERJ6GEYJ553 ERJ6GEYJ553 ERJ6GEYJ553 ERJ6GEYJ553 ERJ6GEYJ553	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 118KOHM,J,1/10W M 118KOHM, J,1/4W M 118KOHM, 1/10W M 10KOHM, 1/10W	1 1 2 1 1 1 1 1 1 1 1 2 1 1 1 1 1 2 1 1 1 2 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6456 R6457,5 8 R6459 R6460	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ553 ERJ6GEYJ553 ERJ6GEYJ553 ERJ6GEYJ553 ERJ6GEYJ553 ERJ14YJ103	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 10KOHM,J,1/10W M 1.7KOHM,J,1/10W	1 1 2 1 1 1 1 1 1 1 1 2 1 1 1 1 1 2 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6456 R6457,5 8 R6456 R6457,5 8 R6459 R6460 R6461	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ153 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ553 ERJ6GEYJ553 ERJ14YJ103 ERJ6ENF1183 ERJ6ENF1183 ERJ6ENF12551 ERJ14YJ104 ERJ14YJ203U ERG1FJS471D	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/4W M 118KOHM,J,1/4W M 118KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5 5 R6456 R6457,5 8 R6459 R6460 R6461 R6463	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ563 ERJ14YJ104 ERJ14YJ104 ERJ14YJ203U ERG1FJS471D ERJ6GEYJ102	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 0.0HM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/4W M 118KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/10W M 100KOHM,J,1/10W M 100KOHM,J,1/10W	1 1 2 1 1 1 1 1 1 1 1 1 1 2 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6456 R6457,5 8 R6456 R6457,5 8 R6459 R6460 R6461	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ153 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ553 ERJ6GEYJ553 ERJ14YJ103 ERJ6ENF1183 ERJ6ENF1183 ERJ6ENF12551 ERJ14YJ104 ERJ14YJ203U ERG1FJS471D	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/4W M 118KOHM,J,1/4W M 118KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5 5 R6456 R6457,5 8 R6459 R6460 R6461 R6463	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ563 ERJ14YJ104 ERJ14YJ104 ERJ14YJ203U ERG1FJS471D ERJ6GEYJ102	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 0.0HM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/4W M 118KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/4W M 100KOHM,J,1/10W M 100KOHM,J,1/10W M 100KOHM,J,1/10W	1 1 2 1 1 1 1 1 1 1 1 1 1 2 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5 5 R6456 R6457,5 8 R6459 R6460 R6461 R6463 R6464	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ563 ERJ14YJ103 ERJ6ENF1183 ERJ6ENF1183 ERJ6ENF1183 ERJ6ENF1183 ERJ6ENF1183 ERJ6ENF2551 ERJ14YJ104 ERJ14YJ203U ERG1FJS471D ERJ6GEYJ102 ERJ6GEYJ222	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 0.0HM,J,1/10W M 10KOHM,J,1/10W M 10OKOHM,J,1/4W M 10OKOHM,J,1/4W M 10OKOHM,J,1/4W M 10OKOHM,J,1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5 5 R6456 R6457,5 8 R6459 R6460 R6461 R6463 R6464 R6465	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ153 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ563 ERJ14YJ103 ERJ6ENF1183 ERJ6ENF1183 ERJ6ENF1187 ERJ14YJ104	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 10KOHM,J,1/10W M 10OKOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 2.2KOHM,J,1/10W M 2.2KOHM,J,1/10W M 8.2 OHM,J,3W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5 5 R6456 R6457,5 8 R6459 R6460 R6461 R6463 R6464 R6465 R6466	TAJAAH0470JV ERJ3GEYJ472 ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ772 ERJ14YJ104 ERJ14YJ203U ERG1FJ5471D ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 10KOHM,J,1/10W M 2.2KOHM,J,1/10W M 8.2 OHM,J,3W M 1KOHM,J,1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5 5 R6456 R6457,5 8 R6459 R6460 R6461 R6463 R6466 R6467	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ563 ERJ6GEYJ102 ERJ14YJ104 ERJ14YJ104 ERJ14YJ203U ERG1FJS471D ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 1.0KOHM,J,1/10W M 10KOHM,J,1/10W M 1.7KOHM,J,1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 2 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5 5 R6456 R6457,5 8 R6456 R6467 R6468	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ102 ERJ14YJ104 ERJ14YJ203U ERG1FJS471D ERJ6GEYJ102	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 10KOHM,J,1/10W M 1.7KOHM,J,1/10W M 1.8KOHM,J,1/10W M 1.8KOHM,J,1/10W M 1.8KOHM,J,1/10W M 1.8KOHM,J,1/10W M 1.9KOHM,J,1/10W M 1.9KOHM,J,1/10W M 1.0KOHM,J,1/10W M 1.0KOHM,J,1/10W M 1.0KOHM,J,1/10W M 1.0KOHM,J,1/10W M 1.0KOHM,J,1/10W M 1.0KOHM,J,1/10W M 1.2KOHM,J,1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R6107 R6110 R6118,1 9 R6120 R6121 R6123 R6124 R6125 R6126 R6431 R6433 R6439,4 0 R6450 R6451 R6452 R6453 R6454,5 5 R6456 R6457,5 8 R6459 R6460 R6461 R6463 R6466 R6467 R6466 R6467 R6468 R6469	TAJAAH0470JV ERJ3GEYJ472 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ102 ERJ14YJ104 ERJ14YJ203U ERG1FJS471D ERJ6GEYJ102	M 47 OHM,J,1/16W M 4.7KOHM,J,1/16W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 1.5KOHM,J,1/10W M 0.0HM,J,1/10W M 0.0HM, 1/10W M 0.0HM, 1/10W M 10KOHM,J,1/10W M 1.7KOHM,J,1/10W M 1.8KOHM,J,1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

D-6	Don't Wo	Part Name &	D	Dama la a
Ref. No.	Part No.	Description	Pcs	Remarks
R6473	ERJ6GEYJ822	M 8.2KOHM,J,1/10W	1	
R6474	ERG1FJS121D	M 120 OHM, J, 1W	1	
R6475	ERJ6GEYJ332	M 3.3KOHM, J,1/10W	1	
R6476	ERJ6ENF2743		1	
<u> </u>	ERJ6ENF6981	M 274KOHM, 1/10W		
R6478		M6.98KOHM, 1/10W	1	
R6479	ERJ6GEYJ104	M 100KOHM, J, 1/10W		
R6480	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6481	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R6482	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6483	ERJ14YJ752	M 75KOHM, J,1/4W	1	
R6484	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
1	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
6			_	
R6487	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6488	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6489	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6491	ERJ14YJ104	м 100конм, J,1/4W	1	
R6492	ERJ6ENF2003	M 200KOHM, 1/10W	1	
R6493	ERJ6ENF2703	м 270КОНМ, 1/10W	1	
R6495,9	ERJ6GEYJ154	M 150KOHM,J,1/10W	2	
6				
R6497	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6498,9	ERG2FNJS8R2E	M 8.2 OHM, J, 2W	2	
9				
R6500	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	
R6501-	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	9	
09				
R6510	ERX3FJS2R2D	M 2.2 OHM, J, 3W	1	
R6511	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6512	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6513	ERX3FJS2R2D	M 2.2 OHM, J, 3W	1	
R6514	ERJ6GEYJ104	м 100конм, J, 1/10W	1	
R6515	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
	<del>†</del>			
R6516	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6517	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6518	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R6519	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6520	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6521	ERJ6GEYJ104	м 100КОНМ,J,1/10W	1	
R6524	ERJ6ENF3001	м ЗКОНМ, 1/10W	1	
R6525	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6526	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6527	ERJ14YJ102	M 1KOHM, J,1/4W	1	
R6528	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6529-	ERJ6GEYJ470	M 47 OHM,J,1/10W	8	
36		, , , , ,		
R6538	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6539	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R6540	ERJ6GEYJ104	м 100конм, J, 1/10W	1	
R6541	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6542	ERJ6GEYJ100	· · · · · · · · · · · · · · · · · · ·	1	
R6544-		M 10 OHM, J, 1/10W		
R6544-	ERJ6GEYJ100	M 10 OHM,J,1/10W	3	
R6548	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6550	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
	<del> </del>		1	
R6551	ERJ6GEYJ101	M 100 OHM, J, 1/10W	_	
R6552,5	ERJ6ENF1003	M 100KOHM, 1/10W	2	
	EDC1 E TC1 01 D	M 100 OUM 7 157	1	
R6554	ERG1FJS101D	M 100 OHM, J, 1W		
R6555	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6556	ERJ6GEYJ122	M 1.2KOHM, J, 1/10W	1	
R6558	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6559	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6560,6	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
1				
R6562	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6563	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	1	
R6565	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6566	TAJAAH0101JV	м 100 ОНМ,J,1/16W	1	
R6567,6	ERJ6GEYJ472	м 4.7конм, J, 1/10W	2	
8				
R6570	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6571-	ED TECEV TA71	M 470 OHM,J,1/10W	8	
	ERJ6GEYJ471	,-,-,-,-		
78 R6580	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	

R8585 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R8586 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R8588, B RJ6GEYJ103 M 10KOHM, J, 1/10W 1 R8588, B RJ6GEYJ103 M 10KOHM, J, 1/10W 1 R8588, B RJ6GEYJ103 M 10KOHM, J, 1/10W 1 R8581 ERJ6GEYJ105 M 1.5KOHM, J, 1/10W 1 R8581 ERJ6GEYJ105 M 1.5KOHM, J, 1/10W 1 R8591 ERJ6GEYJ105 M 1.5KOHM, J, 1/10W 1 R8591 ERJ6GEYJ105 M 1.5KOHM, J, 1/10W 1 R8591 ERJ6GEYJ101 M 100KOHM, J, 1/10W 1 R8595 ERJ6ENF132 M14.3KOHM, 1/10W 1 R8595 ERJ6ENF132 M14.3KOHM, 1/10W 1 R8599 R8598 RBJ6GEYJ101 M 100 OHM, J, 1/10W 1 R8599 RBJ6GEYJ101 M 100 OHM, J, 1/10W 1 R8699 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R8690 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R8690 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R8691 ERJ6GEYJ100 M 15 OHM, J, 1/10W 1 R8691 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R8692 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R8693 ERJ14YJ550U M 15 OHM, J, 1/10W 1 R8693 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R8693 ERJ6GEYJ101 M 10 OHM, J, 1/10W 1 R8690 ERJ6GEYJ101 M 10 OHM, J, 1/10W 1 R8690 ERJ6GEYJ101 M 10 OHM, J, 1/10W 1 R8690 ERJ6GEYJ101 M 10 OHM, J, 1/10W 1 R86901 ERJ6GEYJ101 M 10 OHM, J, 1/10W 1 R86901 ERJ6GEYJ101 M 10 OHM, J					
R6581 TAJAAHO1JJV M 100 CHM,J,1/16W 1 R6582, B ERGENF3902 M 39RCHM, 1/10W 2 R6585 ERJGCENF1501 M 7.5KCHM, 1/10W 1 R6586 ERJGCENT103 M 10KOHM,J,1/10W 1 R6586 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6587 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6588, B ERJGCEYJ102 M 1.5KCHM,J,1/10W 1 R6589 ERJGCEYJ105 M 10KOHM,J,1/10W 1 R6589 ERJGCEYJ105 M 10KOHM,J,1/10W 1 R6590 ERJGCEYJ105 M 10KOHM,J,1/10W 1 R6591 ERJGCEYJ105 M 10KOHM,J,1/10W 1 R6596 ERJGCEYJ105 M 10KOHM,J,1/10W 1 R6596 ERJGCEYJ105 M 10KOHM,J,1/10W 1 R6597 ERJGCEYJ106 M 100KOHM,J,1/10W 1 R6598 ERJGCEYJ101 M 100KOHM,J,1/10W 1 R6599 ERJGCEYJ101 M 100KOHM,J,1/10W 1 R6599 ERJGCEYJ101 M 100KOHM,J,1/10W 1 R6600 ERJGCEYJ101 M 100KOHM,J,1/10W 1 R6600 ERJGCEYJ101 M 100 CHM,J,1/10W 1 R6601 ERJGCEYJ101 M 100 CHM,J,1/10W 1 R6601 ERJGCEYJ104 M 100KOHM,J,1/10W 1 R6601 ERJGCEYJ104 M 100KOHM,J,1/10W 1 R6601 ERJGCEYJ104 M 100KOHM,J,1/10W 1 R6610 ERJGCEYJ104 M 100KOHM,J,1/10W 1 R6611 ERJGSEYJ104 M 100KOHM,J,1/10W 1 R6617 I ERJGCEYJ104 M 100KOHM,J,1/10W 1 R6617 ERJGEYJ104 M 100KOHM,J,1/10W 1 R6617 ERJGCEYJ222 M 2.2KOHM,J,1/10W 2 R6619 ERJGCEYJ100 M 15 CHM,J,1/10W 1 R6622 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6623 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6624 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6625 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6627 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6628 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6629 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6621 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6627 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6628 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6629 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6620 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6621 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6626 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6627 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6628 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6629 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6629 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6620 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6621 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6623 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6624 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6625 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R66266 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6627 ERJGCEYJ103 M 10KOHM,J,1/10W 1 R6628 ERJGCEYJ103 M 10KO		Part No.		Pcs	Remarks
R6582,8 ERJ6ENF3902 M 39KOHM, 1/10W 2 3 3 8 5 8 4 ERJ6ENF7501 M 7.5KOHM, 1/10W 1 1 8 6 5 8 ERJ6ENF7501 M 7.5KOHM, 1/10W 1 1 8 6 5 9 8 ERJ6ENF7501 M 10KOHM, 1/10W 1 1 8 6 5 9 8 ERJ6EYJ152 M 1.5KOHM, 1/10W 1 1 8 6 5 9 8 ERJ6EYJ152 M 1.5KOHM, 1/10W 1 1 8 6 5 9 8 ERJ6EYJ152 M 1.5KOHM, 1/10W 2 9 9 8 6 5 9 0 ERJ6EYJ152 M 1.5KOHM, 1/10W 1 1 8 6 5 9 1 8 ERJ6EYJ152 M 1.5KOHM, 1/10W 1 1 8 6 5 9 1 8 ERJ6EYJ152 M 1.5KOHM, 1/10W 1 1 8 6 5 9 1 8 ERJ6EYJ105 M 10KOHM, 1/10W 1 1 8 6 5 9 1 8 ERJ6EYJ105 M 1.5KOHM, 1/10W 1 1 8 6 5 9 1 8 ERJ6EYJ105 M 1.5KOHM, 1/10W 1 1 8 6 5 9 1 8 ERJ6EYJ105 M 1.5KOHM, 1/10W 1 1 8 6 5 9 1 8 ERJ6EYJ105 M 1.5KOHM, 1/10W 1 1 8 6 5 9 1 8 ERJ6EYJ103 M 10KOHM, 1/10W 1 1 8 6 5 9 1 8 ERJ6EYJ103 M 10KOHM, 1/10W 1 1 8 6 5 9 9 0 ERJ6EYJ103 M 10KOHM, 1/10W 1 1 8 6 5 9 9 0 ERJ6EYJ103 M 10KOHM, 1/10W 1 1 8 6 6 9 0 0 ERJ6EYJ101 M 100 OHM, 1/1/10W 3 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		TA.TAAH0101.TV	_	1	
3					
R8585 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R8586 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R8588, B RJ6GEYJ103 M 10KOHM, J, 1/10W 1 R8588, B RJ6GEYJ103 M 10KOHM, J, 1/10W 1 R8588, B RJ6GEYJ103 M 10KOHM, J, 1/10W 1 R8581 ERJ6GEYJ105 M 1.5KOHM, J, 1/10W 1 R8581 ERJ6GEYJ105 M 1.5KOHM, J, 1/10W 1 R8591 ERJ6GEYJ105 M 1.5KOHM, J, 1/10W 1 R8591 ERJ6GEYJ105 M 1.5KOHM, J, 1/10W 1 R8591 ERJ6GEYJ101 M 100KOHM, J, 1/10W 1 R8595 ERJ6ENF132 M14.3KOHM, 1/10W 1 R8595 ERJ6ENF132 M14.3KOHM, 1/10W 1 R8599 R8598 RBJ6GEYJ101 M 100 OHM, J, 1/10W 1 R8599 RBJ6GEYJ101 M 100 OHM, J, 1/10W 1 R8699 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R8690 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R8690 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R8691 ERJ6GEYJ100 M 15 OHM, J, 1/10W 1 R8691 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R8692 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R8693 ERJ14YJ550U M 15 OHM, J, 1/10W 1 R8693 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R8693 ERJ6GEYJ101 M 10 OHM, J, 1/10W 1 R8690 ERJ6GEYJ101 M 10 OHM, J, 1/10W 1 R8690 ERJ6GEYJ101 M 10 OHM, J, 1/10W 1 R8690 ERJ6GEYJ101 M 10 OHM, J, 1/10W 1 R86901 ERJ6GEYJ101 M 10 OHM, J, 1/10W 1 R86901 ERJ6GEYJ101 M 10 OHM, J	3			-	
R6586 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6587 ERJ6GEYJ152 M 1.5KOHM, J, 1/10W 2 9 R6591 ERJ6GEYJ152 M 1.5KOHM, J, 1/10W 1 R6592 BRJ6GEYJ152 M 1.5KOHM, J, 1/10W 1 R6592, 9 ERJ6GEYJ152 M 1.5KOHM, J, 1/10W 1 R6594 ERJ6GEYJ152 M 1.5KOHM, J, 1/10W 1 R6595 ERJ6ENF1432 M 1.5KOHM, J, 1/10W 1 R6596 ERJ6ENF1432 M 14.3KOHM, 1/10W 1 R6597 ERJ6ENF1432 M 14.3KOHM, 1/10W 1 R6598 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6599 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6599 ERJ6GEYJ101 M 100 OHM, J, 1/10W 2 00 R6604 ERJ6GEYJ101 M 100 OHM, J, 1/10W 3 R6605- ERJ6GEYJ104 M 100 OHM, J, 1/10W 1 R6610 ERJ6GEYJ104 M 100 OHM, J, 1/10W 1 R6610 ERJ6GEYJ104 M 15 OHM, J, 1/2W 4 R6611- ERJ14YJ150U M 15 OHM, J, 1/2W 4 R6611- ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R6612 ERJ6GEYJ100 M 15 OHM, J, 1/10W 1 R6613 ERJ6GEYJ100 M 15 OHM, J, 1/10W 1 R6614 ERJ6GEYJ100 M 15 OHM, J, 1/10W 1 R6615 ERJ6GEYJ100 M 15 OHM, J, 1/10W 1 R6627, 2 ERJ6GEYJ100 M 10 OHM, J, 1/10W 2 R6629 ERJ6GEYJ100 M 10 OHM, J, 1/10W 2 R6621 ERJ6ENF1543 M 154KOHM, J, 1/10W 2 R6621 ERJ6ENF1543 M 154KOHM, J, 1/10W 1 R6627, 2 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6627, 2 TAJAHO10JJV M 10 OHM, J, 1/10W 1 R6627, 2 TAJAHO10JJV M 10 OHM, J, 1/10W 1 R6628 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R6629 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R6621 ERJ6ENF1540 M 10 OHM, J, 1/10W 1 R6624 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R6625 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R6626 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R6627, 2 TAJAHO10JJV M 10 OHM, J, 1/10W 1 R6628 ERJ14YJ560 M 6.2OHM, J, 1/4W 2 R6641, 4 ERJ14YJ560 M 6.2OHM, J, 1/4W 2 R6643 ERJ14YJ560 M 6.2OHM, J, 1/4W 1 R6664, 4 ERJ14YJ560 M M 15 OHM, J, 1/10W 1 R6665 ERJ6EYJ101 M 150 OHM, J, 1/10W 1 R66666 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R66670 ERJ6GEYJ151 M 150 OHM, J, 1/10W 1 R66680 ERJ6GEYJ151 M 150 OHM, J, 1/10W 1 R66690 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R66690 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6690 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6690 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6690 E	R6584	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6587 ERJ6GEYJ152 M 1.5KOHM, J,1/10W 1 R6588, ERAGGEYJ103 M 10KOHM, J,1/10W 2 9 86590 BRAGGEYJ122 M 2.2KOHM, J,1/10W 1 R6591 ERJ6GEYJ120 M 1.5KOHM, J,1/10W 1 R6592,9 ERJ6GEYJ105 M 1.6KOHM, J,1/10W 1 R6592,9 ERJ6GEYJ105 M 1.5KOHM, J,1/10W 1 R6593 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6595 ERJ6ENF5231 M 5.23KOHM, 1/10W 1 R6596 ERJ6ENF5231 M 5.23KOHM, 1/10W 1 R6598 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6599 BRAGGEYJ101 M 100 OHM, J,1/10W 1 R6599 BRAGGEYJ101 M 100 OHM, J,1/10W 1 R6590 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6605 ERJ6GEYJ101 M 10M 10M, J,1/2W 2 9 R6601 ERJ6GEYJ104 M 10MKOHM, J,1/10W 1 R6605 ERJ6GEYJ224 M 2.2KOHM, J,1/10W 1 R6601 ERJ6GEYJ104 M 10M, J,1/10W 1 R6611 ERJ14YJ150U M 15 OHM, J,1/2W 1 R6611 ERJ6GEYJ322 M 2.2KOHM, J,1/10W 1 R6611 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 2 R6614 ERJ6GEYJ103 M 10KOHM, J,1/10W 2 R6620 ERJ6ENF5231 M 15 OHM, J,1/4W 2 0 R6621 ERJ6ENF1543 M 15 OHM, J,1/4W 2 0 R6621 ERJ6ENF1543 M 15 OHM, J,1/10W 1 R6622, 2 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6623 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6624 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6627, 2 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6627, 2 TAJAAH0101JV M 100 OHM, J,1/10W 1 R6627, 2 TAJAH0101JV M 100 OHM, J,1/10W 1 R6628 ERJ6ENF5E0 M 2.2KOHM, J,1/4W 2 R6631 ERJ6ENF5E0 M 2.2KOHM, J,1/4W 1 R6641 ERJ14YJ5R6U M 10 OHM, J,1/10W 1 R6627 ERJ6ENF5E0 M 2.2KOHM, J,1/4W 1 R6643 ERJ14YJ5T6U M 15 OHM, J,1/10W 1 R6644 ERJ14YJ5T6U M 15 OHM, J,1/10W 1 R6647 A ERJ14YJ5T6U M 15 OHM, J,1/10W 1 R66484 ERJ14YJ5T6U M 15 OHM, J,1/10W 1 R6649 ERJ6ENF5E0 M 8.2KOHM, J,1/10W 1 R6669 ERJ6ENF5E0 M 8ESISTOR ARRAY 1 R6666 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6667 ERJ6GEYJ151 M 150 OHM, J,1/10W 1 R6669 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R66690 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R66690 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R66900 ERJ6GEYJ101 M 100 OHM, J,1/10W 1	R6585	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6588,8 BRJ6GEYJ103 M 10KOHM,J,1/10W 2 986590 ERJ6GEYJ122 M 2.2KOHM,J,1/10W 1 1 R6591 RRJ6GEYJ152 M 1.5KOHM,J,1/10W 1 1 R6591 RRJ6GEYJ152 M 1.5KOHM,J,1/10W 2 3 3 1	R6586	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
9	R6587	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	1	
R6590 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R6591 PRJ6GEYJ152 M 1.5KOHM,J,1/10W 2 R6594 ERJ14YJ104 M 100KOHM,J,1/10W 1 R6595 ERJ6EWF1432 M14.3KOHM, 1/10W 1 R6596 ERJ6EWF1432 M14.3KOHM, 1/10W 1 R6597 RRJ6GEYJ103 M 10KOHM,J,1/10W 1 R6598 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6599 PRJ6GEYJ101 M 100 OHM,J,1/10W 2 R6699,0 RRJ5GEYJ101 M 100 OHM,J,1/10W 3 R6604 ERJ6GEYJ224 M 220KOHM,J,1/10W 3 R6605- RRJ6GEYJ224 M 220KOHM,J,1/10W 1 R6605- RRJ6GEYJ224 M 220KOHM,J,1/10W 1 R6606- RRJ6GEYJ224 M 220KOHM,J,1/10W 1 R6610- ERJ6GEYJ224 M 10KOHM,J,1/10W 1 R6611- REJ14YJ150U M 10KOHM,J,1/10W 1 R6611- REJ14YJ150U M 15 OHM,J,1/2W 1 R6613- RRJ6GEYJ322 M 2.2KOHM,J,1/10W 2 R6614,1 RRJ14YJ150U M 15 OHM,J,1/2W 1 R6615 ERJ6GEYJ32 M 2.2KOHM,J,1/10W 2 R6627 RRJ6GEYJ32 M 3.3KOHM,J,1/10W 2 R6628 RRJ6GEYJ33 M 10KOHM,J,1/10W 1 R6627 ERJ6GEYJ33 M 10KOHM,J,1/10W 1 R6627 ERJ6GEYJ00 M 10 OHM,J,1/10W 1 R6628 ERJ6GEYJ00 M 10 OHM,J,1/10W 1 R6629 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6627 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6627 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6627 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6628 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6629 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6621 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6624 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6626 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6627 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6628 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6629 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6635- ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R66363 ERJ14YJ204 M 200KOHM, J,1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM,J,1/10W 1 R6659 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6669 ERJ6GEYJ151 M 150 OHM,J,1/10W 1	R6588,8	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6591 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R6592,9 ERJ6GEYJ105 M 1MONIM,J,1/10W 1 R6595 ERJ6ENF1432 M 14.3KOHM, 1/10W 1 R6596 ERJ6ENF15231 M 5.23KOHM, 1/10W 1 R6598 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6599 REJ6GEYJ101 M 100 OHM,J,1/10W 1 R6690,0 ERJ6GEYJ101 M 100 OHM,J,1/10W 3 R6604 ERJ6GEYJ101 M 100 OHM,J,1/10W 3 R6608,0 ERJ12YJ100 M 10M,J,1/10W 1 R6608,0 ERJ12YJ100 M 10M,J,1/10W 1 R6608,0 ERJ12YJ100 M 10M,J,1/10W 1 R6615 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6617,1 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6617,1 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2 R6617,1 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2 R6620 ERJ6GEYJ10M M 15 OHM,J,1/10W 2 R6621 ERJ6GEYJ10M M 15 OHM,J,1/10W 2 R6621 ERJ6GEYJ10M M 15 OHM,J,1/10W 2 R6622,2 ERJ6GEYJ10M M 15 OHM,J,1/10W 2 R6624 ERJ6GEYJ10M M 10 OHM,J,1/10W 1 R6625 ERJ6GEYJ10M M 10 OHM,J,1/10W 1 R6626 ERJ6GEYJ10M M 10 OHM,J,1/10W 1 R6627,2 TAJAAH0101JV M 10 OHM,J,1/10W 1 R6628 ERJ6GEYJ10M M 10 OHM,J,1/10W 1 R6629 ERJ6GEYJ10M M 10 OHM,J,1/10W 1 R6629 ERJ6GEYJ10M M 10 OHM,J,1/10W 1 R6626 ERJ6GEYJ10M M 10 OHM,J,1/10W 1 R6627,2 TAJAAH0101JV M 100 OHM,J,1/10W 1 R6628 ERJ6GEYJ10M M 10 OHM,J,1/10W 1 R6629 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6630 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6641,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM,J,1/10W 1 R6655 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66656 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66661 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66660 ERJ8GEYJ151 M 150 OHM,J,1/10W 1 R66660 ERJ8GEYJ151 M 150 OHM,J,1/10W 1 R66660 ERJ8GEYJ151 M 150 OHM,J,1/10W 1 R66661 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66660 ERJ8GEYJ151 M 150 OHM,J,1/10W 1 R66660 ERJ8GEYJ151 M 150 OHM,J,1/10W 1 R6660 ERJ6GEYJ151 M 100 OHM,J,1/10W 1 R6660 ERJ6GEYJ151 M 100 OHM,J,1/10		ED TECEN TOO	м 2 2 2 2 2 2 1 / 1 0 1 1	1	
R6592,9 ERJ6GEYJ105 M 1MOHM, J,1/10W 2 86594 ERJ14YJ104 M 100KOHM, J,1/4W 1 R6595 ERJ6ENF1432 M14.3KOHM, 1/10W 1 R6596 ERJ6ENF1432 M14.3KOHM, 1/10W 1 R6597 ERJ6ENF5231 M5.23KOHM, 1/10W 1 R6599,0 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6599,0 ERJ6GEYJ101 M 100 OHM, J,1/10W 2 0 R6604 ERJ6GEYJ101 M 100 OHM, J,1/10W 3 R6605 ERJ6GEYJ101 M 100 OHM, J,1/10W 3 R66060,0 ERJ12YJ1R0 M 1 OHM, J,1/2W 2 9 R6610 ERJ6GEYJ104 M 100KOHM, J,1/10W 1 R6611 ERJ14YJ150U M 15 OHM, J,1/4W 4 R6615 ERJ6GEYJ322 M 3.3KOHM, J,1/10W 1 R6610,2 ERJ6GEYJ322 M 2.2KOHM, J,1/10W 2 R6610,2 ERJ6GEYJ322 M 3.3KOHM, J,1/10W 2 R6611,1 ERJ6GEYJ322 M 2.2KOHM, J,1/10W 2 R6612,2 ERJ6GEYJ322 M 3.5KOHM, J,1/10W 2 R6613,2 ERJ6GEYJ322 M 3.5KOHM, J,1/10W 1 R6621,2 ERJ6GEYJ330 M 15 OHM, J,1/4W 2 R6622,2 ERJ6GEYJ100 M 15 OHM, J,1/10W 1 R6622,2 ERJ6GEYJ100 M 15 OHM, J,1/10W 1 R6622,2 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6622,2 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6622,2 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6623 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6624 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6625 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6626 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6627 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6628 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6621 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6624 ERJ6GEYJ100 M 10 OHM, J,1/10W 1 R6625 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6626 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6627 ERJ6GEYJ151 M 150 OHM, J,1/10W 2 R6641,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6644,4 ERJ14YJ5R6U M 6.2OHM, J,1/10W 1 R6653 ERJ6GEYJ151 M 150 OHM, J,1/10W 1 R66664 ERJ8V470J RESISTOR ARRAY 1 R66666 ERJ6GEYJ151 M 150 OHM, J,1/10W 2 R6666 ERJ6GEYJ151 M 150 OHM, J,1/10W 2 R6666 ERJ6GEYJ151 M 150 OHM, J,1/10W 1 R6666 ERJ6GEYJ151 M 150 OHM, J,1/10W 2 R6666 ERJ6GEYJ151 M 150 OHM, J,1/10W 1 R6669 ERJ6GEYJ151 M 100		<del> </del>			
R6594 ERJ14YJ104 M 100KOHM, J,1/4W 1 R6595 ERJ5ENF1432 M14.3KOHM, 1/10W 1 R6596 ERJ6ENF5231 M5.23KOHM, 1/10W 1 R6598 ERJ6ENF5231 M5.23KOHM, 1/10W 1 R6598 ERJ6ENF5231 M 10KOHM, J,1/10W 1 R6599, 0 ERJ6GEYJ101 M 100 OHM, J,1/10W 2 R6604 ERJ6GEYJ124 M 220KOHM, J,1/10W 3 R6605- R6605- R66682YJ224 M 220KOHM, J,1/10W 3 R6608, 0 ERJ12YJIRO M 1 OHM, J,1/2W 2 R6610 ERJ6GEYJ104 M 100KOHM, J,1/10W 1 R6615 ERJ6GEYJ104 M 100KOHM, J,1/10W 1 R6615 ERJ6GEYJ104 M 15 OHM, J,1/4W 4 R6615 ERJ6GEYJ103 M 3.3KOHM, J,1/10W 1 R6617,1 ERJ6GEYJ222 M 2.2KOHM, J,1/2W 1 R6617,1 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 2 R6619,2 ERJ14YJ150U M 15 OHM, J,1/4W 2 R6619,2 ERJ6GEYJ103 M 10KOHM, J,1/10W 2 R6620 ERJ6ESF1543 M 154KOHM, 1/10W 1 R6621 ERJ6ENF1543 M 15KOHM, J,1/10W 2 R6622 PRJ6ESFJ100 M 10 OHM, J,1/10W 1 R6622 PRJ6ESFJ100 M 10 OHM, J, 1/10W 1 R6623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6624 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R6625 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R6626 ERJ6ENF150 M 10 OHM, J, 1/10W 1 R6627 ERJ6ENF150 M 10 OHM, J, 1/10W 1 R6628 ERJ6ESFJ100 M 10 OHM, J, 1/10W 1 R6629 ERJ6ENF202 M 2.2KOHM, 1/10W 1 R6629 ERJ6ENF202 M 2.2KOHM, 1/10W 1 R6629 ERJ6ENF200 M 2.0KOHM, J, 1/4W 2 R6641,4 ERJ14YJ150U M 15 OHM, J, 1/4W 4 R6645,4 ERJ14YJ150U M 15 OHM, J, 1/4W 2 R6641,4 ERJ14YJ150U M 15 OHM, J, 1/4W 2 R6641,4 ERJ14YJ150U M 15 OHM, J, 1/4W 2 R6643,4 ERJ14YJ150U M 15 OHM, J, 1/10W 1 R6653 ERJ6ESFJ151 M 150 OHM, J, 1/10W 1 R6656 ERJ6ESFJ151 M 150 OHM, J, 1/10W 1 R6657 ERJ6ESFJ151 M 150 OHM, J, 1/10W 1 R66669 ERJ6ESFJ151 M 150 OHM, J, 1/10W 1 R66660 ERJ6ESFJ151 M 150 OHM, J, 1/10W 1 R6661 ERJ6ESFJ151 M 150 OHM, J, 1/10W 1 R66660 ERJ6ESFJ151 M 150 OHM, J, 1/10W 1 R66690 ERJ6ESFJ151 M 100 OHM, J, 1/10W 1 R66901 ERJ6ESFJ151 M 100 OHM, J,					
RR6595 ERJ6ENF1432 M14.3KOHM, 1/10W 1 RR6596 RRJ6ENF5231 M5.23KOHM, 1/10W 1 RR6599,0 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 RR6609,0 ERJ6GEYJ101 M 100 OHM, J, 1/10W 2 RR6604 RRJ6GEYJ101 M 100 OHM, J, 1/10W 3 RR6605- ERJ6GEYJ224 M 220KOHM, J, 1/10W 3 RR6608,0 ERJ12YJ1R0 M 1 OHM, J, 1/10W 3 RR6610 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 RR6610 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 RR6611- ERJ14YJ150U M 15 OHM, J, 1/4W 4 RR6611- ERJ14YJ150U M 15 OHM, J, 1/10W 1 RR6615 ERJ6GEYJ322 M 2.2KOHM, J, 1/10W 2 RR6616 ERJ6GEYJ322 M 2.2KOHM, J, 1/10W 2 RR6617,1 ERJ6GEYJ322 M 2.2KOHM, J, 1/10W 2 RR6619,2 ERJ14YJ150U M 15 OHM, J, 1/4W 2 RR6620 ERJ6GEYJ103 M 10KOHM, J, 1/10W 2 RR6621 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 RR6622,2 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 RR6624 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 RR6625 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 RR6626 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 RR6627,2 TAJAHO101JV M 100 OHM, J, 1/10W 1 RR6629 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 RR6629 ERJ6GEYJ101 M 10 OHM, J, 1/10W 2 RR6630 ERJ14YJ550U M 15 OHM, J, 1/10W 2 RR6640 M 10W	3			-	
R6596 ERJ6ENF5231 M5.23KOHM, 1/10W 1 R6598 ERJ6ECYJ103 M 10KOHM,J,1/10W 1 R6599.0 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 0 R6604 ERJ6GEYJ101 M 100 OHM,J,1/10W 3 R6605- R6605- R6605- M 220KOHM,J,1/10W 3 R6608.0 ERJ12YJ1R0 M 1 OHM, J,1/2W 2 9 R6610 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6611- ERJ14YJ150U M 15 OHM, J,1/4W 4 R6615 ERJ6GEYJ332 M 3.3KOHM,J,1/10W 1 R6616 ERDS1FJ221 C 220 OHM, J,1/2W 1 R6619,2 ERJ14YJ150U M 15 OHM, J,1/10W 2 R6619,2 ERJ6EYJ222 M 2.2KOHM,J,1/10W 1 R6620,2 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R6622,2 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6622,2 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6625 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6626 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6627,2 TAJAAH0101JV M 100 OHM,J,1/10W 1 R6628 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6629 ERJ6ENF5202 M 2.2KOHM, J,1/4W 2 R6635 ERJ6414J150U M 15 OHM, J,1/4W 2 R6644,4 ERJ14YJ5R6U M 6.2OHM, J,1/4W 2 R6645,4 ERJ14YJ5R6U M 6.2OHM, J,1/10W 1 R6647,4 ERJ14YJ5R6U M 6.2OHM, J,1/10W 1 R6665 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6665 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66666 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66666 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66666 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6666 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6667 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6666 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6667 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6666 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6667 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6666 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6666 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6667 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6669 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66690 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	R6594	ERJ14YJ104	M 100KOHM, J,1/4W	1	
R6598 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6599, D ERJ6GEYJ101 M 100 OHM, J, 1/10W 2 R6605- R6604 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6605- R6605- R6605- R6606- R6605- R6606-	R6595	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
R6599,0 ERJ6GEYJ101 M 100 OHM,J,1/10W 2  R6604 ERJ6GEYJ101 M 100 OHM,J,1/10W 1  R6605- ERJ6GEYJ224 M 220KOHM,J,1/10W 3  R6608,0 ERJ12YJIRO M 1 OHM, J,1/2W 2  R6608,0 ERJ12YJIRO M 1 OHM, J,1/2W 2  R6601 ERJ6GEYJ104 M 100KOHM,J,1/10W 1  R6611- ERJ6GEYJ104 M 15 OHM, J,1/4W 4  R6615- ERJ6GEYJ332 M 3.3KOHM,J,1/10W 1  R6615 ERJ6GEYJ322 M 2.2KOHM,J,1/10W 2  R6617,1 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2  R6617,1 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2  R6621 ERJ6ENF1543 M 154KOHM, 1/10W 1  R6622,2 ERJ6EYJ103 M 10KOHM,J,1/10W 1  R6624 ERJ6GEYJ100 M 10 OHM,J,1/10W 1  R6625 ERJ6GEYJ100 M 10 OHM,J,1/10W 1  R6626 ERJ6GEYJ100 M 10 OHM,J,1/10W 1  R6627,2 TAJAAH010JJV M 100 OHM,J,1/10W 1  R6628 ERJ6ENF2202 M 2.2KOHM, 1/10W 1  R6630 ERJ14YJ204 M 200KOHM, J,1/4W 2  R6631 ERJ14YJ5R6U M 6.2OHM, J,1/4W 4  R6641,4 ERJ14YJ5R6U M 6.2OHM, J,1/4W 2  R6641,4 ERJ14YJ5R6U M 6.2OHM, J,1/10W 2  R6644,4 ERJ14YJ5R6U M 6.2OHM, J,1/10W 1  R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1  R66650 ERJ6GEYJ101 M 100 OHM,J,1/10W 2  R66640 ERJ6GEYJ101 M 150 OHM,J,1/10W 2  R66640 ERJ6GEYJ101 M 150 OHM,J,1/10W 2  R66640 ERJ6GEYJ101 M 100 OHM,J,1/10W 2  R66650 ERJ6GEYJ101 M 100 OHM,J,1/10W 1  R66650 ERJ6GEYJ101 M 100 OHM,J,1/10W 1  R66651 ERJ6GEYJ101 M 100 OHM,J,1/10W 1  R66652 ERJ6GEYJ101 M 100 OHM,J,1/10W 1  R66653 ERJ38V470J RESISTOR ARRAY 1  R66664 ERJ6GEYJ151 M 150 OHM,J,1/10W 1  R66676 ERJ6GEYJ151 M 150 OHM,J,1/10W 1  R66677 ERJ8RV470J RESISTOR ARRAY 1  R66678 ERJ8RV470J RESISTOR ARRAY 1  R66676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R66690 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R66902 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R69901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	R6596	ERJ6ENF5231		1	
0 R6604 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6605- BRJ6GEYJ224 M 220KOHM, J, 1/10W 3 07 R6608, 0 ERJ12YJ1RO M 1 OHM, J, 1/2W 2 9 R6610 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R6611- ERJ14YJ15U M 15 OHM, J, 1/4W 4 1	R6598	ERJ6GEYJ103		1	
R6604 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6605- ERJ6GEYJ224 M 220KOHM,J,1/10W 3 07 R6608,0 ERJ12YJ1R0 M 1 OHM, J,1/2W 2 98 R6610 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6611- ERJ14YJ150U M 15 OHM, J,1/4W 4 R6611- ERJ14YJ150U M 15 OHM, J,1/4W 4 R6616 ERDS1FJ221 C 220 OHM, J,1/2W 1 R6617,1 ERJ6GEYJ322 M 2.2KOHM,J,1/10W 2 R6619,2 ERJ14YJ150U M 15 OHM, J,1/4W 2 0 R6621 ERJ6GEYJ102 M 15 OHM, J,1/4W 2 0 R6622,2 ERJ6GEYJ103 M 154KOHM, J,1/10W 1 R6622,2 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6624 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6625 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6626 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6627 ERJ6ENF100 M 10 OHM,J,1/10W 1 R6628 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6629 ERJ6ENF200 M 100 OHM,J,1/4W 2 R6630- ERJ14YJ204 M 200KOHM, J,1/4W 1 R6631- BRJ14YJ150U M 15 OHM, J,1/4W 2 R6641,4 ERJ14YJ5R6U M 6.2OHM, J,1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, J,1/4W 2 R6644,4 ERJ14YJ5R6U M 6.2OHM, J,1/4W 2 R6645,4 ERJ6EYJ101 M 10 OHM,J,1/10W 1 R6655 ERJ6GEYJ101 M 10 OHM,J,1/10W 2 R66640 ERJ6GEYJ101 M 10 OHM,J,1/10W 1 R6665 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6665 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6665 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6665 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R66666 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6667 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R66686 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6669 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66666 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66667 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66668 ERJ8BW470J RESISTOR ARRAY 1 R66669 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66669 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66690 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66690 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66690 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1	R6599,0	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6605- O7 R6605- O7 R6610 ERJGEYJ104 M 10HM, J,1/2W 2 9 R6610 ERJGEYJ104 M 10KOHM, J,1/10W 1 R6615 ERJGEYJ104 M 10KOHM, J,1/10W 1 R6616 ERJGEYJ332 M 3.3KOHM, J,1/10W 1 R6615 ERJGEYJ332 M 3.3KOHM, J,1/10W 1 R6617,1 ERJGEYJ322 M 2.2KOHM, J,1/10W 2 R6619,2 ERJGEYJ222 M 2.2KOHM, J,1/10W 1 R6619,2 ERJGEYJ103 M 15 OHM, J,1/10W 1 R6621 ERJGEYJ103 M 10KOHM, J,1/10W 1 R6622,2 ERJGEYJ100 M 10 OHM, J,1/10W 1 R6625 ERJGEYJ100 M 10 OHM, J,1/10W 1 R6626 ERJGEYJ100 M 10 OHM, J,1/10W 1 R6626 ERJGEYJ100 M 10 OHM, J,1/10W 1 R6627,2 TAJAAH0101JV M 100 OHM, J,1/10W 1 R6628 ERJGEYJ10W M 15 OHM, J,1/4W 1 R6630 ERJ14YJ204 M 200KOHM, J,1/4W 1 R6630 ERJ14YJ50U M 15 OHM, J,1/4W 1 R6631 ERJGEYJ101 M 10 OHM, J,1/10W 1 R6632 ERJGEYJ101 M 10 OHM, J,1/10W 1 R6633 ERJ4YJ50U M 15 OHM, J,1/4W 1 R6635 ERJGEYJ101 M 10 OHM, J,1/10W 1 R66360 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6641,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6663,6 ERJGEYJ101 M 100 OHM, J,1/10W 1 R66656 ERJGEYJ101 M 100 OHM, J,1/10W 1 R66657 ERJGEYJ101 M 150 OHM, J,1/10W 1 R66658 ERJGEYJ101 M 100 OHM, J,1/10W 1 R66659 ERJGEYJ101 M 100 OHM, J,1/10W 1 R66659 ERJGEYJ101 M 100 OHM, J,1/10W 1 R66650 ERJGEYJ101 M 100 OHM, J,1/10W 1 R66666 ERJGEYJ101 M 150 OHM, J,1/10W 1 R66667 ERJGEYJ101 M 150 OHM, J,1/10W 1 R66669 ERJGEYJ101 M 150 OHM, J,1/10W 1 R66669 ERJGEYJ101 M 150 OHM, J,1/10W 1 R66669 ERJGEYJ101 RESISTOR ARRAY 1 R66666 ERJGEYJ101 RESISTOR ARRAY 1 R66666 ERJGEYJ101 RESISTOR ARRAY 1 R66676 ERJGEYJ101 RESISTOR ARRAY 1 R6669 ERJGEYJ101 RESISTOR ARRAY 1 R6669 ERJGEYJ103 M 10KOHM, J, 1/10W 1 R66690 ERJGEYJ103 M 10KOHM, J, 1/10W 1 R66901 ERJGEYJ103 M 10KOHM, J, 1/10W 1 R66902 ERJGEYJ221 M 220 OHM, J, 1/10W 1		ED TECEN TIO1	м 100 они т 1/10м	1	
07 R6608, 0 ERJ12YJ1RO		+		_	
R6608, 0 ERJ12YJ1R0 M 1 OHM, J,1/2W 2 R6610 ERJ6GEYJ104 M 100KOHM, J,1/10W 1 R6611- ERJ14YJ150U M 15 OHM, J,1/4W 4	07	_1000310224			
R6610 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R6611- ERJ14YJ150U M 15 OHM, J, 1/4W 4 R6611- ERJ14YJ150U M 15 OHM, J, 1/10W 1 R6615 ERJ6GEYJ332 M 3.3KOHM, J, 1/10W 1 R6616 ERDS1FJ221 C 220 OHM, J, 1/2W 1 R6617,1 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 2 R6617,2 ERJ14YJ150U M 15 OHM, J, 1/4W 2 O	R6608,0	ERJ12YJ1R0	M 1 OHM, J,1/2W	2	
R6611- ERJ14YJ150U M 15 OHM, J,1/4W 4  R6615 ERJ6GEYJ332 M 3.3KOHM, J,1/10W 1  R6616 ERDSIFJ221 C 220 OHM, J,1/2W 1  R6617,1 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 2  R6619,2 ERJ14YJ150U M 15 OHM, J,1/4W 2  R6621 ERJ6ENF1543 M 154KOHM, J,1/10W 1  R6622,2 ERJ6GEYJ103 M 10KOHM, J,1/10W 1  R6622,2 ERJ6GEYJ103 M 10KOHM, J,1/10W 1  R6625 ERJ6GEYJ100 M 10 OHM, J,1/10W 1  R6626 ERJ6GEYJ100 M 10 OHM, J,1/10W 1  R6627,2 TAJAAH0101JV M 100 OHM, J,1/10W 1  R6627,2 TAJAAH0101JV M 100 OHM, J,1/4W 4  R6630 ERJ14YJ150U M 15 OHM, J,1/4W 4  R6630 ERJ14YJ150U M 15 OHM, J,1/4W 4  R6641,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2  R6643,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2  R6644,4 ERJ14YJ5R6U M 6.2OHM, J,1/4W 4  R6644,4 ERJ14YJ5R6U M 6.2OHM, J,1/4W 2  R6645,5 ERJ6GEYJ101 M 100 OHM, J,1/10W 1  R6655 ERJ6GEYJ101 M 15 OHM, J,1/10W 2  R6664 R6645,4 ERJ6GEYJ151 M 150 OHM, J,1/10W 2  R6664 R6645,4 ERJ6GEYJ151 M 150 OHM, J,1/10W 2  R6664 R6645,4 ERJ6GEYJ151 M 150 OHM, J,1/10W 2  R6664 ERJ6GEYJ104 M 100 OHM, J,1/10W 1  R6665 ERJ6GEYJ107 M 100 OHM, J,1/10W 1  R6665 ERJ6GEYJ108 M 100 OHM, J,1/10W 1  R6665 ERJ6GEYJ109 M 100 OHM, J,1/10W 1  R6665 ERJ6GEYJ101 M 100 OHM, J,1/10W 1  R6666 ERJ6GEYJ101 M 100 OHM, J,1/10W 1  R6667 ERJ6GEYJ101 M 150 OHM, J,1/10W 2  R6666 ERJ6GEYJ101 M 150 OHM, J,1/10W 1  R6666 ERJ6GEYJ103 M 150 OHM, J,1/10W 1  R6666 ERJ6GEYJ103 M 150 OHM, J,1/10W 1  R6669 ERJ6GEYJ103 M 10KOHM, J,1/10W 1  R6669 ERJ6GEYJ103 M 10KOHM, J,1/10W 1  R66690 ERJ6GEYJ103 M 10KOHM, J,1/10W 1  R66901 ERJ6GEYJ103 M 10KOHM, J,1/10W 1  R66902 ERJ6GEYJ101 M 100 OHM, J,1/10W 1  R66902 ERJ6GEYJ221 M 220 OHM, J,1/10W 1	9				
14	R6610			1	
R6615 ERJ6GEYJ332 M 3.3KOHM,J,1/10W 1 R6617,1 ERJ6GEYJ221 C 220 OHM, J,1/2W 1 R6617,1 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2 R6619,2 ERJ14YJ150U M 15 OHM, J,1/4W 2 O R6621 ERJ6ENF1543 M 154KOHM, 1/10W 1 R6622,2 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6624 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6626 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6626 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6627,2 TAJAAH0101JV M 100 OHM,J,1/16W 2 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6630 ERJ14YJ204 M 200KOHM, J,1/4W 4 R6630 ERJ14YJ5R6U M 6.2OHM, J,1/4W 4 R6641,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, J,1/4W 4 R6645,4 ERJ14YJ5R6U M 6.2OHM, J,1/4W 2 R6646,4 ERJ14YJ5R6U M 6.2OHM, J,1/10W 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6665 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R66665 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6665 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6665 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R66667,6 ERJ6GEYJ104 M 100 OHM,J,1/10W 2 R66667,6 ERJ6GEYJ105 M 150 OHM,J,1/10W 2 R66669 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R66669,6 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R66669 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R66669 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R66669 ERJ6GEYJ101 RESISTOR ARRAY 1 R66660 ERJ6GEYJ101 RESISTOR ARRAY 1 R66661 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R66669 ERJ6GEYJ101 RESISTOR ARRAY 1 R66660 ERJ6GEYJ101 RESISTOR ARRAY 1 R66660 ERJ6GEYJ101 RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R6669 ERJ6GEYJ103 M 10KOHM,J,J/10W 1 R66901 ERJ6GEYJ103 M 10KOHM,J,J/10W 1 R66901 ERJ6GEYJ221 M 220 OHM,J,J/10W 1	R6611-	ERJ14YJ150U	M 15 OHM, J,1/4W	4	
R6616 ERDS1FJ221 C 220 OHM, J,1/2W 1 R6617,1 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2 R6619,2 ERJ14YJ150U M 15 OHM, J,1/4W 2 OR6621 ERJ6ENF1543 M 154KOHM, 1/10W 1 R6622,2 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6624 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6625 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6626 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6627,2 TAJAAH010JJV M 100 OHM,J,1/10W 1 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6629 ERJ4YJ150U M 15 OHM, J,1/4W 1 R6630 ERJ14YJ50U M 15 OHM, J,1/4W 2 R6631 ERJ14YJ586U M 6.2OHM, 1/4W 2 R6641,4 ERJ14YJ586U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ586U M 6.2OHM, 1/4W 2 R6644,4 ERJ6EYJ151 M 150 OHM,J,1/10W 2 R6655 ERJ6EYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6EYJ101 M 100 OHM,J,1/10W 2 R6665 ERJ6EYJ104 M 100 OHM,J,1/10W 1 R6665 ERJ6EYJ104 M 100 OHM,J,1/10W 1 R6665 ERJ6EYJ104 M 100 OHM,J,1/10W 1 R6665,6 ERJ6EYJ104 M 100 OHM,J,1/10W 1 R6667 ERJ6EYJ151 M 150 OHM,J,1/10W 1 R6667 ERJ6EYJ151 M 150 OHM,J,1/10W 1 R6667 ERJ6EYJ104 M 100 OHM,J,1/10W 2 R6661 ERJ6EYJ104 M 100 OHM,J,1/10W 1 R6667 ERJ6EYJ105 M 150 OHM,J,1/10W 1 R6667,6 ERJ6EYJ151 M 150 OHM,J,1/10W 2 R6666 ERJ6EYJ151 M 150 OHM,J,1/10W 1 R6667 ERJ6EYJ151 M 150 OHM,J,1/10W 1 R6667 ERJ6EYJ151 M 150 OHM,J,1/10W 1 R6666 ERJ6EYJ151 M 150 OHM,J,1/10W 2 R6666 ERJ6EYJ151 M 150 OHM,J,1/10W 1 R6666 ERJ8BV470J RESISTOR ARRAY 1 R6666 ERJ8BV470J RESISTOR ARRAY 1 R6666 ERJ8BV470J RESISTOR ARRAY 1 R6666 ERJBSV470J RESISTOR ARRAY 1 R6669 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R66901 ERJ6EYJ221 M 200 OHM,J,1/10W 1		ED TECEN 1333	м 2 2гоим т 1/10г	1	
R6617,1 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2 R6619,2 ERJ14YJ150U M 15 OHM, J,1/4W 2 OR6621 ERJ6ENF1543 M 154KOHM, 1/10W 1 R6622,2 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6625 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6627,2 TAJAAH0101JV M 100 OHM,J,1/10W 1 R6627,2 TAJAAH0101JV M 100 OHM,J,1/10W 1 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6629 ERJ14YJ204 M 200KOHM,J,1/4W 1 R6635 ERJ14YJ204 M 200KOHM,J,1/4W 1 R6634 ERJ14YJ5R6U M 6.2OHM,J,1/4W 2 R6635 ERJ14YJ5R6U M 6.2OHM,J,1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM,J,1/10W 2 R6665 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6656 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66661 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66661 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66661 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66661 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66661 ERJ6GEYJ151 RESISTOR ARRAY 1 REG666 ERB38V470J RESISTOR ARRAY 1 RE					
8 R66619, 2 ERJ14YJ150U M 15 OHM, J,1/4W 2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		<del> </del>			
0 R6621 ERJ6ENF1543 M 154KOHM, 1/10W 1 R6622, 2 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 3 R6624 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6626 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6627, 2 TAJAAH0101JV M 100 OHM,J,1/16W 2 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6630 ERJ14YJ204 M 200KOHM, J,1/4W 1 R6635 ERJ14YJ50U M 15 OHM, J,1/4W 4 R6635 ERJ14YJ50U M 6.2OHM, J,1/4W 2 R6641,4 ERJ14YJ5R6U M 6.2OHM, J,1/4W 2 R6645,4 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6665 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6665 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6655 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6665 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6666 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6666 ERJ6GEYJ101 M 150 OHM,J,1/10W 2 R6666 ERJ6GEYJ101 RESISTOR ARRAY 1 R6666 EXB38V470J RESISTOR ARRAY 1 R6669 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66902 ERJ6GEYJ101 M 100 OHM,J,1/10W 1	8		1 2.210111,0,1,1011	-	
R6622,2 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R6624 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6626 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6627,2 TAJAAH0101JV M 100 OHM,J,1/16W 2 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6630 ERJ14YJ204 M 200KOHM, J,1/4W 1 R6635 ERJ14YJ150U M 15 OHM, J,1/4W 4 R6635 ERJ14YJ150U M 15 OHM, J,1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, J,1/10W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, J,1/10W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, J,1/10W 2 R6645,4 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 2 R66664 EXB38V470J RESISTOR ARRAY 1 R66664 EXB38V470J RESISTOR ARRAY 1 R6667 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66669 EXB38V470J RESISTOR ARRAY 1 R66660 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66661 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66661 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R66661 ERJ6GEYJ101 M 150 OHM,J,1/10W 2 R66661 ERJ6GEYJ101 RESISTOR ARRAY 1 R66660 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66900 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	R6619,2	ERJ14YJ150U	M 15 OHM, J,1/4W	2	
R6622,2 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R6624 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6626 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6627,2 TAJAAH0101JV M 100 OHM,J,1/16W 2 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6630 ERJ14YJ204 M 200KOHM, J,1/4W 1 R6635 ERJ14YJ150U M 15 OHM, J,1/4W 4 R6635 ERJ14YJ150U M 15 OHM, J,1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM, J,1/10W 2 R6643,4 ERJ14YJ5R6U M 6.2OHM,J,1/10W 2 R6644,4 ERJ14YJ5R6U M 6.2OHM,J,1/10W 2 R6655 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 2 R66664 EXB38V470J RESISTOR ARRAY 1 R66664 EXB38V470J RESISTOR ARRAY 1 R6667 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66666 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66666 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66667 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66668 EXB38V470J RESISTOR ARRAY 1 R66660 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66900 EXB36V470J RESISTOR ARRAY 1 R66900 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	-	ERJ6ENF1543	M 154KOHM, 1/10W	1	
R6624 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R6625 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R6626 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R6627, 2 TAJAAH0101JV M 100 OHM, J, 1/16W 2 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6630 ERJ14YJ204 M 200KOHM, J, 1/4W 1 R6635 ERJ14YJ150U M 15 OHM, J, 1/4W 4 R6641, 4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643, 4 ERJ14YJ5R6U M 6.2OHM, J, 1/4W 2 R6645, 4 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6640, 4 ERJ14YJ5R6U M 6.2OHM, J, 1/4W 2 R6645, 6 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6650 ERJ6GEYJ151 M 150 OHM, J, 1/10W 1 R6655 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R6657 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R6665, 6 TAJAAH0101JV M 100 OHM, J, 1/10W 2 R6661 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6663 EXB38V470J RESISTOR ARRAY 1 R6667 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6669 EXB38V470J RESISTOR ARRAY 1 R6667 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6668 EXB38V470J RESISTOR ARRAY 1 R6667 EXB38V470J RESISTOR ARRAY 1 R6667 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R6669 EXB38V470J RESISTOR ARRAY 1 R66901 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R66901 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1	R6622,2	<del> </del>			
R6625 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6626 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R6627, 2 TAJAAH0101JV M 100 OHM, J, 1/16W 2 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6630 ERJ14YJ204 M 200KOHM, J, 1/4W 1 R6635 ERJ14YJ150U M 15 OHM, J, 1/4W 4 R6635 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643, 4 ERJ14YJ5R6U M 15 OHM, J, 1/4W 2 R6643, 4 ERJ14YJ5R6U M 6.2OHM, J, 1/4W 2 R6644, 4 ERJ14YJ5R6U M 6.2OHM, J, 1/10W 2 R6645, 4 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6646, 4 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6653 EXB38V680J RESISTOR ARRAY 1 R6655 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R6659, 6 TAJAAH0101JV M 100 OHM, J, 1/10W 2 R6661, 6 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R66661, 6 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R66661, 6 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R66661, 6 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R66661, 6 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R66660 EXB38V472J RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R66680 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66900 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R66901 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1	3		, , .		
R6626 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6627,2 TAJAAH0101JV M 100 OHM,J,1/16W 2 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6630 ERJ14YJ204 M 200KOHM, J,1/4W 1 R6635 ERJ14YJ150U M 15 OHM, J,1/4W 4 R6635 ERJ14YJ150U M 6.2OHM, 1/4W 2 R6641,4 ERJ14YJ5R6U M 6.2OHM, J,1/4W 2 R6643,4 ERJ14YJ150U M 15 OHM,J,1/10W 2 R66645,4 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R66649 EXB38V680J RESISTOR ARRAY 1 R6653 EXB38V680J RESISTOR ARRAY 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6657 ERJ6GEYJ104 M 100KOHM,J,1/10W 2 R6661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66661 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66660 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6668 EXB38V470J RESISTOR ARRAY 1 R6666 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667 ERJ6GEYJ151 RESISTOR ARRAY 1 R6666 ERJ6GEYJ151 RESISTOR ARRAY 1 R6666 EXB38V470J RESISTOR ARRAY 1 R6667 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R6666 EXB38V470J RESISTOR ARRAY 1 R66666 EXB38V470J RESISTOR ARRAY 1 R6666 EXB38V470J RESISTOR ARRAY 1 R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66902 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	R6624	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6627,2 TAJAAHO101JV M 100 OHM,J,1/16W 2 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6630 ERJ14YJ204 M 200KOHM, J,1/4W 1 R6635- BRJ14YJ5N0 M 15 OHM, J,1/4W 4 R6641,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ5N0 M 15 OHM,J,1/10W 2 R6645,4 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6645 EXB38V680J RESISTOR ARRAY 1 R6655 EXB38V680J RESISTOR ARRAY 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 2 R6666 ERJ6GEYJ105 M 150 OHM,J,1/10W 2 R6666 ERJ6GEYJ107 RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1	R6625	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
8 R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6630 ERJ14YJ204 M 200KOHM, J,1/4W 1 R6635- ERJ14YJ150U M 15 OHM, J,1/4W 4 8 R6641,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ5R6U M 15 OHM, J,1/4W 2 R6645,4 ERJ6GEYJ151 M 150 OHM, J,1/10W 2 R66647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R66647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R66647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R66653 EXB38V680J RESISTOR ARRAY 1 R6655 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM, J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM, J,1/10W 2 R66650,6 ERJ6GEYJ151 M 150 OHM, J,1/10W 2 R66661,6 ERJ6GEYJ151 M 150 OHM, J,1/10W 2 R66661,6 ERJ6GEYJ151 M 150 OHM, J,1/10W 2 R66661 EXB38V470J RESISTOR ARRAY 1 R66664 EXB38V470J RESISTOR ARRAY 1 R66667 EXB38V470J RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R66667 EXB38V470J RESISTOR ARRAY 1 R66667 EXB38V470J RESISTOR ARRAY 1 R66666 EXB38V470J R6SISTOR ARRAY 1 R66666 EXB36V470J R6SISTOR ARRAY 1 R66660 EXB36V470J R6V0M,J,J/10W 1 R66690 ERJ6GEYJ103 M 10K0HM,J,J/10W 1	R6626	<del> </del>	†		
R6629 ERJ6ENF2202 M 2.2KOHM, 1/10W 1 R6630 ERJ14YJ204 M 200KOHM, J,1/4W 1 R6635- BRJ14YJ150U M 15 OHM, J,1/4W 4 R6641,4 ERJ14YJ150U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ150U M 15 OHM, J,1/4W 2 R6645,4 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R66649 EXB38V680J RESISTOR ARRAY 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6657 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66669 EXB38V470J RESISTOR ARRAY 1 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66669 EXB38V470J RESISTOR ARRAY 1 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667,6 ERJ6GEYJ151 RESISTOR ARRAY 1 R6667,6 ERJ6GEYJ151 RESISTOR ARRAY 1 R6667,6 ERJ6GEYJ151 RESISTOR ARRAY 1 R6667 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R6690 EXB38V470J RESISTOR ARRAY 1 R66900 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6900- ERJ6GEYJ101 M 100 OHM,J,1/10W 3	_ ′	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R6630 ERJ14YJ204 M 200KOHM, J,1/4W 1 R6635- BRJ14YJ150U M 15 OHM, J,1/4W 4 R6643- BRJ14YJ5R6U M 6.2OHM, 1/4W 2 R6643,4 ERJ14YJ150U M 15 OHM, J,1/4W 2 R66643,4 ERJ14YJ150U M 15 OHM, J,1/4W 2 R66645,4 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R66649 EXB38V680J RESISTOR ARRAY 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R66556 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100 OHM,J,1/10W 2 R6665,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6665,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66664 EXB38V470J RESISTOR ARRAY 1 R66666 EXB38V470J RESISTOR ARRAY 1 R66669 EXB38V470J RESISTOR ARRAY 1 R6667 EXB38V470J RESISTOR ARRAY 1 R6667 EXB38V470J RESISTOR ARRAY 1 R6667 EXB38V470J RESISTOR ARRAY 1 R6666 EXB38V470J RESISTOR ARRAY 1 R6667 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66900 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R69002- ERJ6GEYJ221 M 220 OHM,J,1/10W 3		ED.TERNESSOS	M 2 2KOHM 1/10W	1	
R6635- 38 R6641,4 ERJ14YJ150U M 15 OHM, J,1/4W 2 R6643,4 ERJ14YJ150U M 15 OHM, J,1/4W 2 R66443,4 ERJ14YJ150U M 15 OHM, J,1/4W 2 R6645,4 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6649 EXB38V680J RESISTOR ARRAY 1 R6653 EXB38V680J RESISTOR ARRAY 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R66656, TAJAAH0101JV M 100 OHM,J,1/16W 2 R6665, ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6665, ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6666, ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6666, ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R66670 EXB38V470J RESISTOR ARRAY 1 R66686 EXB38V470J RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R66686 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66900 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R69902- ERJ6GEYJ101 M 100 OHM,J,1/10W 1					
38 R6641,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 2 R6643,4 ERJ14YJ15OU M 15 OHM, J,1/4W 2 R6645,4 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R6649 EXB38V680J RESISTOR ARRAY 1 R6653 EXB38V680J RESISTOR ARRAY 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R66656, TAJAAH0101JV M 100 OHM,J,1/16W 2 R6663 EXB38V470J RESISTOR ARRAY 1 R6664 EXB38V470J RESISTOR ARRAY 1 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6669 EXB38V470J RESISTOR ARRAY 1 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6668 EXB38V470J RESISTOR ARRAY 1 R6667 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R6669 EXB38V470J RESISTOR ARRAY 1 R6666 EXB38V470J RESISTOR ARRAY 1 R6667 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66901 EXB38V470J RESISTOR ARRAY 1 R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6635-				
2 R6643,4 ERJ14YJ150U M 15 OHM, J,1/4W 2 R6645,4 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R66647,4 ERJ14YJ5R6U M 6.2OHM, 1/4W 2 R66649 EXB38V680J RESISTOR ARRAY 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100 OHM,J,1/16W 2 R6659,6 TAJAAH0101JV M 100 OHM,J,1/16W 2 R66661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66664 EXB38V472J RESISTOR ARRAY 1 RESISTOR ARRAY 1 R66667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 R6667,6 EXB38V470J RESISTOR ARRAY 1 RESISTOR ARRAY	38 R6641 4			2	
4 R6645,4 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	2				
66	4				
8 R6649 EXB38V680J RESISTOR ARRAY 1 R6653 EXB38V680J RESISTOR ARRAY 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6659,6 TAJAAH0101JV M 100 OHM,J,1/16W 2 R6661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6663 EXB38V472J RESISTOR ARRAY 1 R6664 EXB38V470J RESISTOR ARRAY 1 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6669 EXB38V470J RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R66676 EXB38V470J RESISTOR ARRAY 1 R66686 EXB38V470J RESISTOR ARRAY 1 R66696 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1	R6645,4	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6653 EXB38V680J RESISTOR ARRAY 1 R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6657,6 TAJAAH0101JV M 100 OHM,J,1/16W 2 R6661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6663 EXB38V472J RESISTOR ARRAY 1 R6664 EXB38V470J RESISTOR ARRAY 1 R66667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66670 EXB38V470J RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R66676 EXB38V470J RESISTOR ARRAY 1 R66676 EXB38V470J RESISTOR ARRAY 1 R66676 EXB38V470J RESISTOR ARRAY 1 R66680 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6647,4 8	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
R6655 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6656 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R6659,6 TAJAAH0101JV M 100 OHM,J,1/16W 2 R6661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6663 EXB38V472J RESISTOR ARRAY 1 R6664 EXB38V470J RESISTOR ARRAY 1 R66667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66670 EXB38V470J RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R66676 EXB38V470J RESISTOR ARRAY 1 R66676 EXB38V470J RESISTOR ARRAY 1 R66668 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R66680 EXB38V470J RESISTOR ARRAY 1 R66680 EXB38V470J RESISTOR ARRAY 1 R66690 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R66901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6901 ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6649				
R6656 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R6659, 6 TAJAAH0101JV M 100 OHM, J, 1/16W 2 R6661, 6 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6663 EXB38V472J RESISTOR ARRAY 1 R6664 EXB38V470J RESISTOR ARRAY 1 R66667, 6 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R66669 EXB38V472J RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R6670 EXB38V470J RESISTOR ARRAY 1 R6675 EXB38V470J RESISTOR ARRAY 1 R6676 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R66680 EXB38V470J RESISTOR ARRAY 1 R66680 EXB38V470J RESISTOR ARRAY 1 R66690 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM, J, 1/10W 3	R6653	<del> </del>		_	
R6659,6 TAJAAH0101JV M 100 OHM,J,1/16W 2 0 R6661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6663 EXB38V472J RESISTOR ARRAY 1 R6664 EXB38V470J RESISTOR ARRAY 1 R66667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66669 EXB38V472J RESISTOR ARRAY 1 R66670 EXB38V470J RESISTOR ARRAY 1 R6670 EXB38V470J RESISTOR ARRAY 1 R6675 EXB38V470J RESISTOR ARRAY 1 R66666 EXB38V470J RESISTOR ARRAY 1 R6666 EXB38V470J RESISTOR ARRAY 1 R6668 EXB38V470J RESISTOR ARRAY 1 R66680 EXB38V470J RESISTOR ARRAY 1 R66680 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66690 EXB38V470J RESISTOR ARRAY 1 R66900 EXB38V470J RESISTOR ARRAY 1 R66	R6655			-	
0 R6661,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6663 EXB38V472J RESISTOR ARRAY 1 RE6664 EXB38V470J RESISTOR ARRAY 1 RE6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R66667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6669 EXB38V470J RESISTOR ARRAY 1	R6656				
2 R6663 EXB38V472J RESISTOR ARRAY 1 R6664 EXB38V470J RESISTOR ARRAY 1 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6669 EXB38V470J RESISTOR ARRAY 1 R6670 EXB38V470J RESISTOR ARRAY 1 R6675 EXB38V470J RESISTOR ARRAY 1 R6676 EXB38V470J RESISTOR ARRAY 1 R66666 EXB38V470J RESISTOR ARRAY 1 R6683 EXB38V470J RESISTOR ARRAY 1 R6686 EXB38V470J RESISTOR ARRAY 1 R6690 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6659,6 0	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R6664 EXB38V470J RESISTOR ARRAY 1 R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2 R6669 EXB38V472J RESISTOR ARRAY 1 R6670 EXB38V470J RESISTOR ARRAY 1 R6675 EXB38V470J RESISTOR ARRAY 1 R6676 EXB38V470J RESISTOR ARRAY 1 R6683 EXB38V470J RESISTOR ARRAY 1 R6686 EXB38V470J RESISTOR ARRAY 1 R6696 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6661,6 2	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6667,6 ERJ6GEYJ151 M 150 OHM,J,1/10W 2  R6669 EXB38V472J RESISTOR ARRAY 1  R6670 EXB38V470J RESISTOR ARRAY 1  R6675 EXB38V472J RESISTOR ARRAY 1  R6676 EXB38V470J RESISTOR ARRAY 1  R6683 EXB38V470J RESISTOR ARRAY 1  R6684 EXB38V470J RESISTOR ARRAY 1  R6686 EXB38V470J RESISTOR ARRAY 1  R6686 EXB38V470J RESISTOR ARRAY 1  R6686 EXB38V470J RESISTOR ARRAY 1  R6696 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R6699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1  R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6663				
8 R6669 EXB38V472J RESISTOR ARRAY 1 R6670 EXB38V470J RESISTOR ARRAY 1 R6675 EXB38V472J RESISTOR ARRAY 1 R6676 EXB38V470J RESISTOR ARRAY 1 R6683 EXB38V470J RESISTOR ARRAY 1 R6686 EXB38V470J RESISTOR ARRAY 1 R6686 EXB38V470J RESISTOR ARRAY 1 R6686 EXB38V472J RESISTOR ARRAY 1 R6696 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6664	1			
R6670 EXB38V470J RESISTOR ARRAY 1 R6675 EXB38V472J RESISTOR ARRAY 1 R6676 EXB38V470J RESISTOR ARRAY 1 R6683 EXB38V470J RESISTOR ARRAY 1 R6686 EXB38V472J RESISTOR ARRAY 1 R6686 EXB38V472J RESISTOR ARRAY 1 R6696 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6667,6 8	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6675 EXB38V472J RESISTOR ARRAY 1 R6676 EXB38V470J RESISTOR ARRAY 1 R6683 EXB38V470J RESISTOR ARRAY 1 R6686 EXB38V472J RESISTOR ARRAY 1 R6686 EXB38V472J RESISTOR ARRAY 1 R6696 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6669	+		_	
R6676 EXB38V470J RESISTOR ARRAY 1 R6683 EXB38V470J RESISTOR ARRAY 1 R6686 EXB38V472J RESISTOR ARRAY 1 R6696 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6991 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6670				
R6683 EXB38V470J RESISTOR ARRAY 1 R6686 EXB38V472J RESISTOR ARRAY 1 R6696 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6675				
R6686 EXB38V472J RESISTOR ARRAY 1 R6696 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6991 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6676				
R6696 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3	R6683	<b>+</b>			
R6699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6901 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3					
R6901 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6902- ERJ6GEYJ221 M 220 OHM, J, 1/10W 3					
R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 3					
	R6902-		· .		
	04		. , ,		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R6912	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6913	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6920-	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
23				
R6924	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6955	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6956- 58	ERJ6GEYJ221	M 220 OHM,J,1/10W	3	
R6959	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6975- 78	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6979	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R7102	ERJ14YJ220	M 22 OHM, J,1/4W	1	
R7105	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R7106,0 7	ERJ14YJ220	M 22 OHM, J,1/4W	2	
R7108	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7109	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7110,1 1	ERJ14YJ220	M 22 OHM, J,1/4W	2	
R7117	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7121	ERJ14YJ220	M 22 OHM, J,1/4W	1	
R7125	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7126-	TAJAAH0470JV	M 47 OHM, J, 1/16W	3	
28				
R7130	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7132- 35	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7136- 41	ERJ14YJ220	M 22 OHM, J,1/4W	6	
R7142,4 3	EXB38V470J	RESISTOR ARRAY	2	
R7148	EXB38V470J	RESISTOR ARRAY	1	
R7154	EXB38V470J	RESISTOR ARRAY	1	
R7161	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7162,6 3	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7166,6 7	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7170,7 1	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7172- 74	ERJ8GEY0R00	M 0 OHM, 1/8W	3	
R7175- 77	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R7187	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7188	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R7192	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7194	ERJ6GEY0R00 EXB38V470J	M 0 OHM, 1/10W	1	
R7196 R7202,0	EXB38V470J ERJ14YJ220	M 22 OHM, J,1/4W	2	
3				
5	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
7	ERJ14YJ220	M 22 OHM, J,1/4W	2	
9	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
R7210,1 1	ERJ14YJ220	M 22 OHM, J,1/4W	2	
R7212	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R7213	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7214,1 5	ERJ14YJ220	M 22 OHM, J,1/4W	2	
R7217 R7218-	ERJ6GEYJ224 ERJ3GEY0R00	M 220KOHM,J,1/10W M 0 OHM, 1/16W	1 4	
21 P7222	ED.T3CEVIECO	м 56 орм т 1/16ы	1	
R7222 R7223	ERJ3GEYJ560 TAJAAH0470JV	M 56 OHM,J,1/16W M 47 OHM,J,1/16W	1	
	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7225		1101111,0,1/10W	-	
R7225 R7226- 29	TAJAAH0470JV	M 47 OHM,J,1/16W	4	
R7226-	TAJAAH0470JV ERJ3GEY0R00	M 47 OHM, J, 1/16W M 0 OHM, 1/16W	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description	100	
R7233- 40	ERJ14YJ220	M 22 OHM, J,1/4W	8	
R7241,4 2	EXB38V470J	RESISTOR ARRAY	2	
R7243- 45	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R7247	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R7248	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
0	EXB38V470J	RESISTOR ARRAY	2	
R7251- 53		M 0 OHM, 1/10W	3	
R7254,5 5		M 47 OHM, J, 1/16W	2	
8	EXB38V470J	RESISTOR ARRAY	2	
R7259	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7283	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7289,9 0	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7293		M 47 OHM, J, 1/16W	1	
R7296	ERJ3GEYJ151	M 150 OHM, J, 1/16W	1	
R7297	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R9002	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9004- 06	ERJ3GEYJ103	м 10КОНМ, J, 1/16W	3	
R9007	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9009	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9010	EXB2HV272JV	RESISTOR ARRAY	1	
R9012	EXB2HV272JV	RESISTOR ARRAY	1	
R9013	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9015- 18	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9019	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9020,2 1	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9022	ERJ6ENF1001	м 1КОНМ, 1/10W	1	
R9023	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R9024	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9026	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9028 R9029,3	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	2	
0	ERJ3GEYJ220	M 22 OHM, J, 1/16W		
R9031,3	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R9033,3	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9035,3				
6	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9039	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9039 R9040	TAJAAH0101JV ERJ3GEYJ100	M 100 OHM,J,1/16W M 10 OHM,J,1/16W	1 1	
R9039 R9040 R9041	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ472	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W	1 1 1	
R9039 R9040 R9041 R9042 R9043,4	TAJAAH0101JV ERJ3GEYJ100	M 100 OHM,J,1/16W M 10 OHM,J,1/16W	1 1	
R9039 R9040 R9041 R9042	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ472 ERJ3GEYJ102	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W	1 1 1	
R9039 R9040 R9041 R9042 R9043,4	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ472 ERJ3GEYJ102 TAJAAH0101JV	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W M 100 OHM,J,1/16W	1 1 1 1 2	
R9039 R9040 R9041 R9042 R9043,4 4	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ472 ERJ3GEYJ102 TAJAAH0101JV ERJ3GEYJ102	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W M 1KOHM,J,1/16W M 100 OHM,J,1/16W	1 1 1 1 2	
R9039 R9040 R9041 R9042 R9043,4 4 R9045 R9046 R9047- 50 R9052	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ472 ERJ3GEYJ102 TAJAAH0101JV ERJ3GEYJ102 ERJ3GEYJ123 TAJAAH0101JV ERJ3GEYJ103	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W M 1KOHM,J,1/16W M 100 OHM,J,1/16W M 1KOHM,J,1/16W M 12KOHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W	1 1 1 2 1 1 4	
R9039 R9040 R9041 R9042 R9043,4 4 R9045 R9046 R9047- 50 R9052 R9053 R9054,5	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ472 ERJ3GEYJ102 TAJAAH0101JV ERJ3GEYJ102 ERJ3GEYJ102 TAJAAH0101JV	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W M 1KOHM,J,1/16W M 100 OHM,J,1/16W M 1KOHM,J,1/16W M 1ZKOHM,J,1/16W M 100 OHM,J,1/16W	1 1 1 1 2 1 1 4	
R9039 R9040 R9041 R9042 R9043,4 4 R9045 R9046 R9047- 50 R9052 R9053 R9054,5 5	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ472 ERJ3GEYJ102 TAJAAH0101JV ERJ3GEYJ102 ERJ3GEYJ123 TAJAAH0101JV ERJ3GEYJ123 TAJAAH0101JV	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W M 100 OHM,J,1/16W M 12KOHM,J,1/16W M 12KOHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 10KOHM,J,1/16W	1 1 1 2 1 1 4	
R9039 R9040 R9041 R9042 R9043,4 4 R9045 R9046 R9047- 50 R9052 R9053 R9054,5 5 R9056,5 7	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ102 ERJ3GEYJ102 TAJAAH0101JV ERJ3GEYJ123 TAJAAH0101JV ERJ3GEYJ123 ERJ3GEYJ123 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ272	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W M 1KOHM,J,1/16W M 100 OHM,J,1/16W M 12KOHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W	1 1 1 1 2 1 1 4	
R9039 R9040 R9041 R9042 R9043,4 4 R9045 R9046 R9047-50 R9052 R9053 R9056,5 7 R9058,5 9 R9060-	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ102 TAJAAH0101JV ERJ3GEYJ102 ERJ3GEYJ102 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ272 ERJ3GEYJ272 ERJ3GEYJ272	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W M 1KOHM,J,1/16W M 100 OHM,J,1/16W M 12KOHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 10.0 OHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W	1 1 1 1 2 1 1 4 1 1 2	
R9039 R9040 R9041 R9042 R9043,4 4 R9045 R9047- 50 R9052 R9053 R9054,5 5 R9056,5 7 R9066- 67 R9068-	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ102 ERJ3GEYJ102 TAJAAH0101JV ERJ3GEYJ123 TAJAAH0101JV ERJ3GEYJ123 ERJ3GEYJ123 ERJ3GEYJ272 ERJ3GEYJ272 ERJ3GEYJ272	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W M 1KOHM,J,1/16W M 100 OHM,J,1/16W M 12KOHM,J,1/16W M 12KOHM,J,1/16W M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 5.6KOHM,J,1/16W	1 1 1 1 2 1 1 4 1 1 2 2	
R9039 R9040 R9041 R9042 R9043,4 4 R9045 R9047- 50 R9052 R9053 R9056,5 7 R9058,5 9 R9060- 67 R9068- 72	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ102 ERJ3GEYJ102 TAJAAH0101JV ERJ3GEYJ123 TAJAAH0101JV ERJ3GEYJ123 ERJ3GEYJ123 ERJ3GEYJ272 ERJ3GEYJ272 ERJ3GEYJ272 ERJ3GEYJ272 ERJ3GEYJ200 ERJ3GEYJ200 ERJ3GEYJ200 ERJ3GEYJ562 TAJAAH0101JV	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W M 1KOHM,J,1/16W M 1KOHM,J,1/16W M 1ZKOHM,J,1/16W M 100 OHM,J,1/16W M 10KOHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W	1 1 1 1 2 1 1 1 2 2 2 2 8	
R9039 R9040 R9041 R9042 R9043,4 4 R9045 R9047- 50 R9052 R9053 R9054,5 5 R9056,5 7 R9066- 67 R9068-	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ102 ERJ3GEYJ102 TAJAAH0101JV ERJ3GEYJ123 TAJAAH0101JV ERJ3GEYJ123 ERJ3GEYJ123 ERJ3GEYJ272 ERJ3GEYJ272 ERJ3GEYJ272 ERJ3GEYJ270 ERJ3GEYJ270 ERJ3GEYJ200 ERJ3GEYJ200 ERJ3GEYJ562 TAJAAH0101JV ERJ3GEYJ103 EXB2HV470JV	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W M 100 OHM,J,1/16W M 12KOHM,J,1/16W M 12KOHM,J,1/16W M 10KOHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 100 OHM,J,1/16W M 101 OHM,J,1/16W M 2.7KOHM,J,1/16W	1 1 1 1 2 1 1 4 1 1 2 2	
R9039 R9040 R9041 R9042 R9043,4 4 R9045 R9047- 50 R9052 R9053 R9056,5 7 R9058,5 9 R9060- 67 R9068- 72 R9073	TAJAAH0101JV ERJ3GEYJ100 ERJ3GEYJ102 ERJ3GEYJ102 TAJAAH0101JV ERJ3GEYJ123 TAJAAH0101JV ERJ3GEYJ123 ERJ3GEYJ123 ERJ3GEYJ272 ERJ3GEYJ272 ERJ3GEYJ272 ERJ3GEYJ272 ERJ3GEYJ200 ERJ3GEYJ200 ERJ3GEYJ200 ERJ3GEYJ562 TAJAAH0101JV	M 100 OHM,J,1/16W M 10 OHM,J,1/16W M 4.7KOHM,J,1/16W M 1KOHM,J,1/16W M 1KOHM,J,1/16W M 1KOHM,J,1/16W M 1ZKOHM,J,1/16W M 100 OHM,J,1/16W M 10KOHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 2.7KOHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W M 100 OHM,J,1/16W	1 1 1 1 2 1 1 1 2 2 2 2 8	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R9077- 79	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9080	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R9081	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9082- 89	TAJAAH0101JV	M 100 OHM,J,1/16W	8	
R9090	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9091,9 2	ERJ3GEYJ103	м 10конм, J, 1/16W	2	
R9093	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R9094	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9095- 98	ERJ3GEYJ103	м 10конм, J, 1/16W	4	
R9102-	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
R9105	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9107- 09	ERJ3GEYJ393	м 39конм, J, 1/16W	3	
R9110	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9111,1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9113	ERJ3GEYJ103	м 10конм, J, 1/16W	1	
R9114- 16	ERJ3GEY0R00	м 0 ОНМ, 1/16W	3	
R9117,1	EXB38VR000	RESISTOR ARRAY	2	
R9119	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9120,2	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R9122- 24	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
	ERJ3GEYJ102	м 1конм, ј, 1/16w	2	
R9127,2	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9130	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9131- 33	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	3	
R9134- 36	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
R9137 R9140-	ERJ3GEYJ472 ERJ3GEYJ103	M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W	3	
42 R9145-	ERJ3GEYJ103	м 10КОНМ, J, 1/16W	3	
	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
1 R9162,6	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
3 R9164,6	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
5 R9200-	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
02	ma	W 47 000 - 5 /5 500		
R9204	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R9205	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9208 R9210	ERJ3GEYJ103 ERJ3GEYJ103	M 10KOHM,J,1/16W M 10KOHM,J,1/16W	1	
R9210 R9212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9300- 04	D1HG33080001	NETWORK RESISTER	5	
R9305	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
	D1HG33080001	NETWORK RESISTER	2	
R9308	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9309	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9313- 16	ERJ3GEY0R00	м 0 ОНМ, 1/16W	4	
R9318,1	ERJ3GEY0R00	м 0 ОНМ, 1/16W	2	
R9321	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9323	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9324- 28	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9329	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9330-	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
33	L	1	<u> </u>	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9337	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
R9338	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
R9339-	ERJ6ENF1001	M 1KOHM, 1/10W	4	
42 R9500-	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
03 R9505-		M 100 OHM,J,1/16W	6	
10				
R9511	EXB2HV272JV	RESISTOR ARRAY	1	
R9512	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9513	EXB2HV272JV	RESISTOR ARRAY	1	
R9515	EXB2HV272JV	RESISTOR ARRAY	1	
R9516,1 7	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9518	EXB2HV470JV	RESISTOR ARRAY	1	
R9519- 21	EXB38V470J	RESISTOR ARRAY	3	
R9522,2 3	EXB2HV470JV	RESISTOR ARRAY	2	
R9524- 26	TAJAAH0470JV	M 47 OHM, J, 1/16W	3	
R9527	EXB38V470J	RESISTOR ARRAY	1	
R9528,2 9	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R9531	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9533,3 4	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9536	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R9537,3	ERJ3GEYJ103	м 10конм, ј, 1/16w	2	
R9540	ERJ3GEYJ304V	м 300конм, J, 1/16W	1	
R9544	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9547	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9700	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9702-	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
04		M 1KOHM, 1/10W	2	
R9706,0	ERJ6ENF1001	, .		
R9708	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9709	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9714	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9716,1 7	ERJL14KJ33M	M 33 OHM, J,1/4W	2	
R9718	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9719	ERJ6ENF1742	M17.4KOHM, 1/10W	1	
R9720	ERJ6ENF6342	M6.34KOHM, 1/10W	1	
R9721 R9722,2	ERJ6ENF2002 ERJ3GEYJ100	M 20KOHM, 1/10W M 10 OHM, J, 1/16W	2	
3				
R9724	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9725	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
7	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9728,2 9	ERJ6ENF2002	M 20KOHM, 1/10W	2	
9	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9740- 42	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R9824	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9830	EXB2HV470JV	RESISTOR ARRAY	1	
R9900	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9901	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9902	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9903	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9904	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9905	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9906	EXB2HV470JV	RESISTOR ARRAY	1	
R9907	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9908,0 9	EXB38V470J	RESISTOR ARRAY	2	
R9910,1 1	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9912	EXB2HV470JV	RESISTOR ARRAY	1	
R9913	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R9914	EXB38V470J	RESISTOR ARRAY	1	
l	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
6 R9917-	EVPOUZATO TO	RESISTOR ARRAY	3	
19	EXB2HV470JV	RESISTOR ARRAY	٥	
R9922	EXB2HV470JV	RESISTOR ARRAY	1	
R9923	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
K9923	EROSGETOTOS	M TOKOHM, 0, 1/10W		
RM2510	PNA4601M05TV	REMOCO RECEIVER	1	
M42310	PNA400IMOSIV	REMOCO RECEIVER	-	
	m	GTDG!!TE DOLDD !!	-	mr. 40 pa 50 r./se
RTL	TNPA3523AE	CIRCUIT BOARD H	1	TH-42PA50H/M  ⚠
RTL	TNPA3523AF	CIRCUIT BOARD H	1	TH-42PA50A A
RTL	TNPA3621AE		1	M = 42FA30A 23
RTL	TNPA3519AL	CIRCUIT BOARD Z	1	-
		CIRCUIT BOARD DG		TH-42PA50A A
RTL	TNPA3519AK	CIRCUIT BOARD DG	1	TH-42PA50H A
RTL	TZTNP01YFSM	CIRCUIT BOARD DG	1	TH-42PA50M 🗥
RTL	TNPA3620AB	CIRCUIT BOARD PA	1	Δ .
RTL	TNPA3686	CIRCUIT BOARD TA	1	TH-42PA50A 🗥
RTL	TNPA3524	CIRCUIT BOARD TB	1	TH-42PA50H/M
			-	<u> </u>
RTL	TNPA3545	CIRCUIT BOARD C1	1	<u> </u>
RTL	TNPA3546	CIRCUIT BOARD C2	1	Δ
RTL	TZTNP010YFS	CIRCUIT BOARD D	1	TH-42PA50H/M
DMI	mgmxrp010::==	OTDOUTE BOARD D	-	A 4000 FOR A
RTL	TZTNP010YFS	CIRCUIT BOARD D	1	TH-42PA50A 🛆
RTL	TNPA3570	CIRCUIT BOARD P	1	A
RTL	TNPA3643AB	CIRCUIT BOARD PB	1	Δ
RTL	TNPA3543	CIRCUIT BOARD SC	1	$\triangle$
RTL	TNPA3243	CIRCUIT BOARD SD	1	Δ
RTL	TNPA3544	CIRCUIT BOARD SS	1	Δ
RTL	TNPA3242	CIRCUIT BOARD SU	1	$\triangle$
RTL	TXN/K1YFSA	CIRCUIT BOARD K	1	Δ
RTL	TNPA3604AB	CIRCUIT BOARD S	1	Δ
S1	K1KA03AA0193	3P CONNECTOR	1	
SC2	K1KA06AA0192	6P CONNECTOR	1	
SC20	K1KA20AA0008	20P CONNECTOR	1	
SC23	K1KA03AA0193	3P CONNECTOR	1	
sc30	K1KA03AA0193	3P CONNECTOR	1	
			2	
SC41,42	K1ML80BA0001	80P CONNECTOR	<del> </del>	
SC45,46	K1KA10A00431	10P CONNECTOR	2	
			_	
SD1-D3	K1MN80B00004	80P CONNECTOR	3	
SD46	K1KA10B00209	10P CONNECTOR	1	
SS11	K1KA07AA0192	7P CONNECTOR	1	
SS12	K1KA05AA0192	5P CONNECTOR	1	
SS23	K1KA12AA0194	12P CONNECTOR	1	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS41-44	K1MN13B00020	13P CONNECTOR	4	
SU1-U3	K1MN80B00004	80P CONNECTOR	3	
SU45	K1KA10B00209	10P CONNECTOR	1	
SW2500	K0F162B00002	SWITCH	1	
SW3751-	EVQ11G05R	SWITCH	5	
55				
	1			
T6461	ETS13TB139AP	SWITCHING TRANS	1	
T6471	ETS19AA259AC	SWITCHING TRANS	1	
TA5	K1KB15B00013	15P CONNECTOR	1	TH-42PA50A
TA6	K1KB09B00019	9P CONNECTOR	1	TH-42PA50A
TB5,B6	K1KB15B00013	15P CONNECTOR	2	TH-42PA50H/M
TU001	ENGF9301GF	TUNER	1	TH-42PA50H/M
				Δ
TU001	ENG37A12GF	TUNER	1	TH-42PA50A ⚠
TU002	ENG39A01GF	TUNER	1	TH-42PA50H/M
	ļ			Δ
	•	i .	1	I

7.5		5 l. 37		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
VR6074	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6477	EVMEASA00B23	CONTROL 2KOHMB 0.3W	1	
VR6557	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
X1101	H0J600400006	CRYSTAL	1	
X2101	TSSA128	CRYSTAL	1	
X2102	EFCS6504BF	CERAMIC FILTER	1	TH-42PA50A
X2103	EFCS7004BF	CERAMIC FILTER	1	TH-42PA50A
X4001	ној202500016	CRYSTAL	1	
X4002	H0J270500087	CRYSTAL	1	
X9000 X9200	H2D2705A0004 H0J200500038	CRYSTAL	1	
Z2 Z50	K1KA05AA0192	5P CONNECTOR	1	
250	K1MN35A00013	35P CONNECTOR	1	
ZA5601- 04	K9ZZ00000424	CONNECTOR	4	
04	K9ZZ00000424	CONNECTOR	4	
ZA6001- 04	K4CD01000013	TERMINAL	4	
03	K4CD01000013	TERMINAL	3	
ZA7101, 02	K4CD01000013	TERMINAL	2	
ZA7104	K4CD01000013	TERMINAL	1	
ZA7201	K4CD01000013	TERMINAL	1	
ZA7203, 04	K4CD01000013	TERMINAL	2	
ZA9001	K4CD01000013	TERMINAL	1	
ZMM1	TMM25401	CLAMPER	1	
C402 C403	ECJ2XC1H101J ECKCNA222MEB	C 100PF, J, 50V C 2200PF, M	1	Δ
C404	F0CAF105A021	C 1UF, 250V	1	<u> </u>
C405	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C407	ECA2WHG220	E 22UF, 450V	1	
C409	F0CAF105A021	C 1UF, 250V	1	
C410	ECJ3YB1E105K	C 1UF, K, 25V	1	Δ
	ECJ2XB1H103K F1A3A102A040	C 0.01UF, K, 50V C 1000PF, J, 1KV	2	
C413,10 C417	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C418	F1J1C1050011	C 1UF, Z, 50V	1	
C419	F1A3A102A040	C 1000PF, J, 1KV	1	
C421,22	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C423	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C424	F1A3A102A040	C 1000PF, J, 1KV	1	
C425 C426	ECJ2XB1H103K ECJ2XC1H471J	C 0.01UF, K, 50V C 470PF, J, 50V	1	
C427	F1J1C1050011	C 1UF, Z, 50V	1	
C428	ECJ2XC1H221J	C 220PF, J, 50V	1	
C429,30	F1K2J1530002	C 0.15PF, J,630V	2	
C431	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C432-34	F1J1C1050011	C 1UF, Z, 50V	3	
C436 C440	F1J1C1050011 ECA1HM100	C 1UF, Z, 50V	1	
C440 C443,44	F1A3A102A040	E 10UF, 50V C 1000PF, J, 1KV	2	
C445	F1J1C1050011	C 1UF, Z, 50V	1	
C446	F2B2W3910005	C 390UF, 450V	1	
C451	F1A3A101A040	C 100PF, J, 1KV	1	
C457	ECWH12333RHV	P 0.013UF, J, 1.2KV	1	
C459	F1K2J1530002	C 0.15PF, J,630V	1	
C460,61 C462	F1A3A331A039 ECJ3YB1E105K	E 330UF, 1KV C 1UF, K, 25V	1	
C462 C463	ECJ2XC1H220J	C 22UF, J, 50V	1	
C465	ECKCNA221KB7	C 220PF, M,	1	Δ
C467	ECKCNA221KB7	C 220PF, M,	1	Δ
C468	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C470	F0CAF105A021	C 1UF, 250V	1	Δ
C471	F1J1C1050011	C 1UF, Z, 50V	1	

	1	T		1
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C473	ECKCNA221KB7	C 220PF, M,	1	$\triangle$
C476	ECKCNA221KB7	C 220PF, M,	1	$\triangle$
C482	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C490	ECJ2XC1H331J	C 330PF, J, 50V	1	
C491	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C492	ECJ2XC1H271J		1	
		C 270PF, J, 50V		
C493	ECA1EM101	E 100UF, 25V	1	
C494,95	ECJ2XC1H101J	C 100PF, J, 50V	2	
C496	F1J1C1050011	C 1UF, Z, 50V	1	
C497	ECA1EM221	E 220UF, 25V	1	
C498	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C501-03	ECJ2XB1H103K	C 0.01UF, K, 50V	3	
		i i		
C504	F1J1C1050011	C 1UF, Z, 50V	1	
C505	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C506-08	ECJ2XB1H103K	C 0.01UF, K, 50V	3	
C509	ECA1EM101	E 100UF, 25V	1	
C510	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C511	ECA1EM331	E 330UF, 25V	1	
	ECJ2XC1H471J	C 470PF, J, 50V	3	
C515	ECA1CM222	E 2200UF, 16V	1	
C516	ECJ2XB1C474K	C 0.47UF, K, 16V	1	
C517	F2D1E1010001	E 10UF, 25V	1	
C518,19	F1J1C1050011	C 1UF, Z, 50V	2	
C523	ECJ3YB1E105K	C 1UF, K, 25V	1	
	F2A1E8210012		1	
		E 820UF, 25V		
C526	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C527	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C528,29	F1J1C1050011	C 1UF, Z, 50V	2	
C530	ECJ2VB1H333K	C 0.033UF, K, 50V	1	
C533	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
	ECJ2XC1H471J	C 470PF, J, 50V	1	
			2	
	ECJ2VB1H333K	C 0.033UF, K, 50V		
C548	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C551-53	ECJ2XB1H104K	C 0.1UF, K, 50V	3	
C554	F1J1C1050011	C 1UF, Z, 50V	1	
C555	ECA2AM101	E 100UF, 100V	1	
C556	F2A1C1520009	E 1500UF, 16V	1	
C557	F2A1E1520089	E 1500UF, 25V	1	
C562	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C572	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C574	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C577	ECA2AM330	E 33UF, 100V	1	
C581	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C583	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C584			1	
	ECJ2XB1H223K	C 0.022UF, K, 50V		
C587	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
	F1K2J1530002	C 0.15PF, J,630V	2	
C601	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C603	ECA1HM470	E 47UF, 50V	1	
C604,05	F2A2C1510004	E 150UF, 160V	2	
C606,07	F1J1C1050011	C 1UF, Z, 50V	2	
C608,09	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
			1	
C610	F1J1C1050011	C 1UF, Z, 50V		
C611	F2B2D1720001	E 1700UF,@ 200V	1	
C612	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C615	F2B2D1720001	E 1700UF,@ 200V	1	
C616	F1A3A102A040	C 1000PF, J, 1KV	1	
C619	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C620	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C623	ECA1HM100	E 10UF, 50V	1	
C624	ECJ3YB1E105K	C 1UF, K, 25V	1	
C626	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C629	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C631	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C633	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C634	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C635	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C636	F1J1C1050011	C 1UF, Z, 50V	1	
C637	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C638,39	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C640	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C641	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C643	ECA1HM470	E 47UF, 50V	1	
<del></del>		,		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ECJ2XC1H331J	C 330PF, J, 50V	2	
			1	
D401	BOFBATOOOOO6	DIODE	1	
D402 D403	MA4240MTA MA4051NM	ZENER DIODE	1	
D404	B0EBKT000007	DIODE	1	
D406	MA4200M	ZENER DIODE	1	
D407	MA188	DIODE	1	
D410	MA111	DIODE	1	
D411	B0BB17000010	DIODE	1	
D412-14	MA111	DIODE	3	
D415	B0JAME000081	DIODE	1	
D417 D418	RU30A MA4082M	DIODE ZENER DIODE	1	
	RU30A	DIODE	2	
D423	MA188	DIODE	1	
D425	MA188	DIODE	1	
D427-29	ERA15-10	DIODE	3	
D431	B0JCDD000002	DIODE	1	
D433	MA4150M	ZENER DIODE	1	
D434	MA4082M	ZENER DIODE	1 1	
D435 D436	ERA15-10 MA188	DIODE	1	
D437	MA4082M	ZENER DIODE	1	
D438	MA4150M	ZENER DIODE	1	
D439	ма4130нта	ZENER DIODE	1	
D440	MA4300M	ZENER DIODE	1	
D441	B0HAMM000122	DIODE	1	
D442	MA4075M	ZENER DIODE	1	
D443	MA4240MTA	ZENER DIODE	1 1	
D444 D445	B0HAMM000122 MA165	DIODE	1	
D443 D459	MA188	DIODE	1	
D461	MA4082M	ZENER DIODE	1	
D462	MA142WKTX	ZENER DIODE	1	
D463-67	ERA15-10	DIODE	5	
D501	B0HANR000016	DIODE	1	
	MA165	DIODE	2	
D505	B0JAME000081	DIODE	1	
D506 D507,08	MA4051NM MA4150M	ZENER DIODE ZENER DIODE	2	
	B0HANM000028		2	
	B0HBSM000043	DIODE	1	
D514	MA4062M	ZENER DIODE	1	
D521	вонамроооо67	DIODE	1	
D528,29	MA153	DIODE	2	
D530	MA4100M	ZENER DIODE	1	
D531,32	B0HAPR000012	DIODE	2	
D534 D535	B0JBSG000026 MA188	DIODE	1	
D536	B0JBSL000013	DIODE	1	
			1	
D538	MA3051M	ZENER DIODE		
D538 D539	MA3051M B0HBRP000007	DIODE DIODE	1	
	<u> </u>		+ +	
D539 D542 D543	B0HBRP000007 MA4180HTA MA4150M	DIODE	1	
D539 D542 D543 D544,45	B0HBRP000007 MA4180HTA MA4150M MA4180HTA	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE	1 1 1 2	
D539 D542 D543 D544,45	B0HBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE	1 1 1 2 1	
D539 D542 D543 D544,45 D549	B0HBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4130M	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE	1 1 1 2 1	
D539 D542 D543 D544,45 D549 D551	B0HBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4130M MA4082M	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE	1 1 1 2 1	
D539 D542 D543 D544,45 D549	B0HBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4130M	DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE	1 1 1 2 1 1 1	
D539 D542 D543 D544,45 D549 D551 D552 D555	BOHBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4075M MA4082M MA4075M	DIODE  ZENER DIODE	1 1 1 2 1 1 1 1	
D539 D542 D543 D544,45 D549 D551 D552 D555	BOHBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4075M MA4082M MA4075M MA4075M	DIODE  ZENER DIODE	1 1 2 1 1 1 1 1	
D539 D542 D543 D544,45 D549 D551 D552 D555 D559 D563 D564 D565	BOHBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4075M MA4075M MA4082M MA4075M MA4075M MA4075M	DIODE  ZENER DIODE	1 1 1 2 1 1 1 1 1 1	
D539 D542 D543 D544,45 D549 D551 D552 D555 D559 D563 D564 D565 D566	BOHBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4130M MA4082M MA4075M MA4075M MA4075M MA4075M MA4062M MA272000AF MA4160M BOHAMM000122	DIODE  ZENER DIODE  DIODE	1 1 1 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D539 D542 D543 D544,45 D554 D555 D555 D559 D563 D564 D565 D566 D568	BOHBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4130M MA4082M MA4075M MA4075M MA4075M MA4075M MA4062M MA272000AF MA4160M BOHAMM000122 MA3J142D0L	DIODE  ZENER DIODE  DIODE  DIODE  DIODE	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D539 D542 D543 D544,45 D559 D555 D563 D564 D565 D566 D568 D569-71	BOHBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4130M MA4082M MA4075M MA4075M MA4075M MA4075M MA4062M MA272000AF MA4160M BOHAMM000122 MA3J142D0L MA4300M	DIODE  ZENER DIODE  DIODE  DIODE  ZENER DIODE	1 1 1 1 1 1 1 1 1 1 1 1 1 3	
D539 D542 D543 D544,45 D559 D555 D559 D563 D564 D565 D566 D568 D569-71	BOHBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4130M MA4082M MA4075M MA4075M MA4075M MA4062M MA272000AF MA4160M BOHAMM000122 MA3J142D0L MA4300M MA188	DIODE  ZENER DIODE  DIODE  DIODE  ZENER DIODE  DIODE  DIODE  DIODE	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D539 D542 D543 D544,45 D559 D555 D559 D563 D564 D565 D566 D568 D569-71 D572 D574	BOHBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4130M MA4082M MA4075M MA4075M MA4075M MA4062M MA272000AF MA4160M BOHAMM000122 MA3J142D0L MA4300M MA188 MA111	DIODE  ZENER DIODE  DIODE  DIODE  DIODE  DIODE  DIODE  DIODE  DIODE	1 1 1 1 1 1 1 1 1 1 1 1 1 3	
D539 D542 D543 D544,45 D559 D555 D559 D563 D564 D565 D566 D568 D569-71	BOHBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4130M MA4082M MA4075M MA4075M MA4075M MA4062M MA272000AF MA4160M BOHAMM000122 MA3J142D0L MA4300M MA188	DIODE  ZENER DIODE  DIODE  DIODE  ZENER DIODE  DIODE  DIODE  DIODE	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D539 D542 D543 D544,45 D549 D551 D552 D555 D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575	BOHBRP000007 MA4180HTA MA4150M MA4180HTA MA4075M MA4130M MA4082M MA4075M MA4075M MA4075M MA4062M MA272000AF MA4160M BOHAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188	DIODE  ZENER DIODE  DIODE  DIODE  DIODE  DIODE  DIODE  DIODE  DIODE  DIODE  DIODE	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

No.	Part No.	Part Name & Description	Pcs	Remarks
D586	В0НАМР000067	DIODE	1	
D587	MA188	DIODE	1	
2307	111100	51055	1	
IC401	CNC1S171R	IC	1	Δ
IC402	C0BBAA000038	IC	1	
IC403,0	CNC1S171R	IC	2	Δ
4				
IC406	C0DAZZZ00021	IC	1	
IC407	CODBAZZO0111	IC	1	
IC408,0	CNC1S171R	IC	2	$\triangle$
9				
IC411	C0BBAA000038	IC	1	
IC412	CNC1S171R	IC	1	
IC501	C2ABDD000064	IC	1	
IC502	C0EBH0000190	IC	1	
IC503,0	C0DAEMB00004	IC	2	
IC505	CNC1S171R	IC	1	
IC506	C0ZBZ0000878	IC	1	
IC507	COCBABEO0023	IC	1	
IC509	C0DABZZ00010	IC	1	
IC512	CODAEMBOOO04	IC	1	
IC520	C9ZB00000496	IC	1	
	. ,			
L402	EXCELSA24	BEAD CHOKE	1	
L403	EXCELSA35	BEAD CHOKE	1	
L404,05	G0B123K00003	INDUCTION COIL	2	Δ
L501	EXCELSA35	BEAD CHOKE	1	
L502	TALLO8N102JA	INDUCTION COIL	1	
L506	EXCELDR25C	BEAD CHOKE	1	
L509	J0JBC0000032	CHIP INDUCTOR	1	
L510	EXCELDR25C	BEAD CHOKE	1	
P2	K1KA06AA0479	6P CONNECTOR	1	
P5	K1KA11AA0183	11P CONNECTOR	1	
P9	K1KA03A00537	3P CONNECTOR	1	
P10	K1KA06AA0182	6P CONNECTOR	1	
P11	K1KA07AA0192	7P CONNECTOR	1	
P12	K1KA05AA0192	5P CONNECTOR	1	
P23	K1KA03AA0182	3P CONNECTOR	1	
P25	K1KA20AA0178	20P CONNECTOR	1	
P30	K1KA05AA0182	5P CONNECTOR	1	
PR401	K5Y502BA0001	FUSE	1	
PR402	K5G202B00015	FUSE	1	
PR501	K5H502Z00003	FUSE	1	
PR503	K5H502Z00003	FUSE	1	
PR509	K5H501Z00005	FUSE	1	
PR601	K5G312B00012	FUSE	1	
	0007007	MD 3 MO T C TOO	_	mrr 4055 F0-
Q002,03	2SB709A	TRANSISTOR	2	TH-42PA50A
Q401	B1CHND000004	TRANSISTOR	1	TH-42PA50A
Q401 Q403	B1CHND000004 B1CBGD000001	TRANSISTOR TRANSISTOR	1	TH-42PA50A
Q401 Q403 Q404	B1CHND000004 B1CBGD000001 B1BCCF000022	TRANSISTOR TRANSISTOR TRANSISTOR	1 1 1	TH-42PA50A
Q401 Q403 Q404 Q406	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	1 1 1	TH-42PA50A
Q401 Q403 Q404 Q406 Q407	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	1 1 1 1 1	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	1 1 1 1 1 2	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	1 1 1 1 1 2 2	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	1 1 1 1 1 2 2	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	1 1 1 1 1 2 2	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL	TRANSISTOR	1 1 1 1 1 2 2 1	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415 Q417 Q418	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL B1CHND000004	TRANSISTOR	1 1 1 1 2 2 1 1	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415 Q417	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL B1CHND000004 2SD1819A	TRANSISTOR	1 1 1 1 1 2 2 2 1 1 1	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415 Q417 Q418 Q420-22	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL B1CHND000004 2SD1819A 2SD1819A	TRANSISTOR	1 1 1 1 1 2 2 2 1 1 1 1 3	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415 Q417 Q418 Q420-22 Q423,24	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL B1CHND000004 2SD1819A 2SD1819A B1CBGD000001	TRANSISTOR	1 1 1 1 1 2 2 1 1 1 1 1 3 2	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415 Q417 Q418 Q420-22 Q423,24 Q430	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002	TRANSISTOR	1 1 1 1 2 2 1 1 1 1 3 2	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415 Q417 Q418 Q420-22 Q423,24 Q430 Q431	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001	TRANSISTOR	1 1 1 1 2 2 1 1 1 1 3 2 1 1	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415 Q417 Q418 Q420-22 Q423,24 Q430 Q431 Q432	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002	TRANSISTOR	1 1 1 1 1 2 2 2 1 1 1 1 3 2 1 1 1 1 1 1	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415 Q417 Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001	TRANSISTOR	1 1 1 1 1 2 2 2 1 1 1 1 3 2 1 1 1 1 1 1	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415 Q417 Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002	TRANSISTOR	1 1 1 1 1 2 2 1 1 1 1 3 2 1 1 1 1 1 1 1	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415 Q417 Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001	TRANSISTOR	1 1 1 1 1 2 2 1 1 1 1 1 2 2 1 1 1 1 1 1	TH-42PA50A
Q401 Q403 Q404 Q406 Q407 Q408,09 Q412,13 Q414 Q415 Q417 Q418 Q420-22 Q423,24 Q430 Q431 Q432 Q433 Q434 Q435 Q436	B1CHND000004 B1CBGD000001 B1BCCF000022 B1DEHQ000007 XN4601 B1CHND000004 B1DAGQ000013 B1ABCF000134 2SB1218ARL B1CHND000004 2SD1819A 2SD1819A B1CBGD000001 B1CEJQ000002 B1DEGS000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002 B1CBGD000001 B1CEJQ000002	TRANSISTOR	1 1 1 1 1 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1	TH-42PA50A

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q501,02	2SD1820A	TRANSISTOR	2	
Q503	XN0440100L	TRANSISTOR	1	
Q505	B1CEJQ000002	TRANSISTOR	1	
Q506	B1CHND000004	TRANSISTOR	1	
Q507	B1DAGQ000013	TRANSISTOR	1	
Q508	XN0450100L	TRANSISTOR	1	
Q509	XN0440100L	TRANSISTOR	1	
Q510	B1DHBD000004	TRANSISTOR	1	
Q511	B1CFND000005	TRANSISTOR	1	
Q512	B1CBGD000001	TRANSISTOR	1	
Q516 Q517	B1DHBD000004	TRANSISTOR TRANSISTOR	1	
Q517 Q518	B1HFCFA00021 B1DEHL000018	TRANSISTOR	1	
Q518 Q519	B1DEHE000018	TRANSISTOR	1	
Q520	B1HFCFA00021	TRANSISTOR	1	
Q525	B1CBGD000001	TRANSISTOR	1	
Q527	B1DEHL000018	TRANSISTOR	1	
Q530	B1CBGD000001	TRANSISTOR	1	
Q535	2SD1819A	TRANSISTOR	1	
Q536-38	B1CFQD000001	TRANSISTOR	3	
Q541	B1CBGD000001	TRANSISTOR	1	
Q544	XN0440100L	TRANSISTOR	1	
Q550	B1CHGD000006	TRANSISTOR	1	
Q551,52	B1CBGD00001	TRANSISTOR	2	
Q553	2SD1819A	TRANSISTOR	1	
Q554	B1DHBD000004	TRANSISTOR	1	
Q557	2SD1819A	TRANSISTOR	1	
Q558	B1CHHG000002	TRANSISTOR	1	
Q559	2SD1819A	TRANSISTOR	1	
Q560	B1CHHG000002	TRANSISTOR	1	
Q561,62	2SD1819A	TRANSISTOR	2	
Q564,65	2SD1819A	TRANSISTOR TRANSISTOR	1	
Q567	B1CBGD000001	TRANSISTOR	-	
R401	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R402	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R403	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R404	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R405	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R407	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R408	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R410,11	D1F5100E0002	F 3.3 OHM, 5W	2	Δ
R412	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R413	D1F5100E0002	F 3.3 OHM, 5W	1	$\triangle$
R414	ERJ8GEYJ153	M 15KOHM, J,1/8W	1	
R415	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R416	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R417	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R418	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R419	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R420	ERJ6GEYJ474	M 470KOHM, J, 1/10W	1	
R421	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R422	ERJ8GEYJ181	M 180 OHM, J,1/8W	1	
R423	ERJ6GEYJ154	M 150KOHM, J, 1/10W	1	
R424 R425	ERJ6GEYJ223 ERJ6GEYJ332	M 22KOHM,J,1/10W M 3.3KOHM,J,1/10W	1	
R425	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R427	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R428	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R429	ERJ8GEYJ103	M 10KOHM, J,1/8W	1	
R430	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R431	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R432	ERJ8GEYJ103	м 10конм, ј,1/8w	1	
D422	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R433	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R435			1	
	ERJ8GEYJ153	M 15KOHM, J,1/8W		
R435	ERJ8GEYJ153 ERJ6GEYJ183	M 15KOHM, J,1/8W M 18KOHM,J,1/10W	1	
R435 R436			<b>†</b>	
R435 R436 R437	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R435 R436 R437 R438	ERJ6GEYJ183 ERJ6GEYJ331	M 18KOHM, J, 1/10W M 330 OHM, J, 1/10W M 12 OHM, J, 1/2W M 470KOHM, J, 1/8W	1	
R435 R436 R437 R438 R439	ERJ6GEYJ183 ERJ6GEYJ331 ERG12SJ120	M 18KOHM,J,1/10W M 330 OHM,J,1/10W M 12 OHM, J,1/2W	1 1 1	
R435 R436 R437 R438 R439	ERJ6GEYJ183 ERJ6GEYJ331 ERG12SJ120 ERJ8GEYJ474	M 18KOHM, J, 1/10W M 330 OHM, J, 1/10W M 12 OHM, J, 1/2W M 470KOHM, J, 1/8W	1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	ED TOENEN 003	Description	1	
R445 R446	ERJ6ENF1003 ERX2SJR39H	M 100KOHM, 1/10W M0.39 OHM, J, 2W	1	
	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R447 R448,49	DOXGR10JA007	RESISTOR ARRAY	2	
R450	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R451	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R452	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R453	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R454	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R455	ERJ6GEYJ106	M 10MOHM, J, 1/10W	1	
R456,57	ERJ6GEYJ333	M 33KOHM,J,1/10W	2	
R458	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R461	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R462	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R463	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R464	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R465	ERJ6ENF5603	м 560конм, 1/10w	1	
R466,67	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R468	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R469	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R470	ERX2SJR39H	M0.39 OHM, J, 2W	1	
R471	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
<u> </u>	ERJ6ENF5603	M 560KOHM, 1/10W	2	
R474	ERG1SJ104P	м 100конм, J, 1W	1	
R475	ERJ6EKF6803	M 680KOHM, 1/10W	1	
	ERJ14YJ181U	M 181 OHM, J,1/4W	2	
R478	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R479	ERG1SJ104P	м 100конм, J, 1W	1	
R480	ERJ6ENF9102	M91.0KOHM, 1/10W	1	
R481	ERJ6GEYJ106	M 10MOHM, J, 1/10W	1	
R482	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R483	ERJ6GEYJ106	M 10MOHM, J, 1/10W	1	
R485	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R486,87	ERJ6GEYJ682	M 6.8KOHM, J, 1/10W	2	
R488	ERJ6GEYJ106	M 10MOHM, J, 1/10W	1	
R489	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R490,91	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R492	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R493	ERG12SJ120	M 12 OHM, J,1/2W	1	
	ERJ6ENF5603	M 560KOHM, 1/10W	3	
R497	ERJ6ENF2402	M 24KOHM, 1/10W	1	
R501 R502,03	ERJ6GEYJ223	M 22KOHM, J, 1/10W M 100KOHM, J, 1/10W	2	
R502,03	ERJ6GEYJ104		1	
R504	ERJ6GEYJ102 ERJ8GEYJ330	M 1KOHM,J,1/10W M 33 OHM, J,1/8W	1	
R505	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R500	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R508	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
	ERJ6GEYJ104	M 100KOHM,J,1/10W	3	
R512	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R512	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R515,16	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R517	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R518	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R521,22	ERJ8GEYJ100	M 10 OHM, J,1/8W	2	
R523	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R524	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R525	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R526,27	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R528	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R530	ERJ6RBD3302	M 3.3KOHM,F,1/10W	1	
R531	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R532	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R533	ERJ8GEYJ223	M 22KOHM, J,1/8W	1	
R534	ERJ8GEYJ224	M 220KOHM, J,1/8W	1	
R535,36	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R537	ERJ6ENF3602	M 36KOHM, 1/10W	1	
R538	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R539	ERJ6RBD1002	M 1.0KOHM, 1/10W	1	
R540	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R541	ERJ6GEYJ104	м 100конм, J, 1/10W	1	
R542	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
	•			

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R543	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R544	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	
R545	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R546,47	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R548	ERJ8GEYJ102	M 1KOHM, J,1/8W	1	
R549	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R550	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R551	ERJ6GEYJ104	м 100конм, J, 1/10W	1	
R552	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R553	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R554	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R555,56	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R557	ERJ8GEYJ471	M 470 OHM, J,1/8W	1	
R558	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R559	ERJ6RBD4702	M 47KOHM, 1/10W	1	
R560	ERJ6ENF1302	M 13KOHM, 1/10W	1	
R561	ERJ6ENF4301	M 4.3KOHM, 1/10W	1	
R562	ERJ6ENF1802	M 18KOHM, 1/10W	1	
R563	ERJ6GEYJ2R2	M 2.2 OHM, J, 1/10W	1	
R564 R565	ERJ6GEYJ474 ERJ6GEYJ334	M 470KOHM,J,1/10W M 330KOHM,J,1/10W	1	
R566	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R567	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R568,69	ERG2SJ181	M 180 OHM, J, 2W	2	
R570	ERJ8GEYJ102	M 1KOHM, J,1/8W	1	
R571	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R572,73	ERJ8ENF3900	м 390 ОНМ, 1/8W	2	
R574	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R575	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R576	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R577,78	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R579	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R580,81	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R582	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R583	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R584	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R585	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R586,87	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R588	ERJ8ENF3900	M 390 OHM, 1/8W	1	
R589,90 R591	ERJ8GEYJ123 ERJ6GEYJ105	M 12KOHM, J,1/8W M 1MOHM,J,1/10W	1	
R592	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R593	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R594	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R595	ERJ8GEYJ222	M 2.2KOHM, J,1/8W	1	
R596	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R597,98	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R599,00	ERJ8GEYJ391	м 390 ОНМ, J,1/8W	2	
R601	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R602	ERJ6ENF3301	м 3.3KOHM, 1/10W	1	
R603	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R604	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	
R606	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R607	ERJ6GEYJ822	M 8.2KOHM, J, 1/10W	1	
R608	ERJ8GEYJ332	M 3.3KOHM, J,1/8W	1	
R609	ERJ6GEYJ822	M 8.2KOHM, J, 1/10W	1	
R610,11	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R612	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R613	ERJ6ENF1602	M 16KOHM, 1/10W	1	
R614	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R615-17	ERJ6GEYJ103	M 10KOHM, J, 1/10W	3	
R618 R619	ERJ6GEYJ104 ERJ8RQFR68	M 100KOHM, J, 1/10W	1	
R620	ERJ8RQFR68 ERJ6GEYJ103	M 0.680HM, J,1/8W M 10K0HM,J,1/10W	1	
R620 R621	ERJ6GEYJ103 ERJ8GEYJ123	M 10KOHM, J, 1/10W M 12KOHM, J, 1/8W	1	
R622	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R623	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R624	ERX2SJR22	M0.22 OHM, J, 2W	1	
R625	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R626	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R627	ERJ6GEYJ822	M 8.2KOHM,J,1/10W	1	
R628	EVMAASA00B33	CONTROL 3KOHMB	1	
R629	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R630	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R631	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R632	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R633	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R634	ERJ8RQFR68	M 0.680HM, J,1/8W	1	
R636	ERJ8ENF1503	M 15KOHM, 1/8W	1	
		1		
R637	ERJ8RQFR68	M 0.680HM, J,1/8W	1	
R640	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R641	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R642-44	ERJ8RQFR68	M 0.680HM, J,1/8W	3	
R645	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R646,47	ERJ6GEYJ223	M 22KOHM,J,1/10W	2	
R648	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R649	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
		M 10KOHM, J, 1/10W	1	
R650	ERJ6GEYJ103			
R651	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R652	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R653	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R654	ERJ8GEYJ101	M 100 OHM, J,1/8W	1	
R655	ERJ8RQJR39	MO.39 OHM, 1/8W	1	
R656	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R657		M 1KOHM, J, 1/10W	1	
	ERJ6GEYJ102	1		
R658	ERJ6GEYJ105	M 1MOHM, J, 1/10W	1	
R659	ERJ6ENF3002	M 30KOHM, 1/10W	1	
R660	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R661	EVMAASA00B53	CONTROL 5KOHMB	1	
R662	ERJ6ENF1303	M 130KOHM, 1/10W	1	
R663	ERJ3GEYJ2R2	M 2.2 OHM,J,1/16W	1	
R664	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
	t	CONTROL 2KOHMB	1	
R665	EVMAASA00B23			
R666	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R667,68	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
R669	ERJ6ENF1303	M 130KOHM, 1/10W	1	
R670	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R671	EVMAASA00B14	CONTROL 10KOHMB	1	
R674	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R675	ERJ3GEYJ2R2	M 2.2 OHM,J,1/16W	1	
R676	ERJ8GEYJ333	м 33КОНМ, J,1/8W	1	
R677	1	M 220KOHM, J, 1/10W	1	
	ERJ6GEYJ224		<del>                                     </del>	
R678	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R679,80	ERJ8RQJR39	MO.39 OHM, 1/8W	2	
R681	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R682	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R683	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R684	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R685	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R686	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
			<del>                                     </del>	
R687	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R688	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R689	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R690	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R691	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R692,93	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
R694	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R695	ERJ6ENF1602	M 16KOHM, 1/10W	1	
R696	ERJ8GEYJ100	M 10 OHM, J,1/8W	1	
			<b>†</b>	
R697	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R698	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R702	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R703,04	ERG2SJ101	M 100 OHM, J, 2W	2	
R706	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R707	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R708	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R712	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R713	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R901	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R903-06	ERJ8ENF1203	M 12KOHM, 1/8W	4	
R907	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R908	ERJ6GEYJ335	M 3.3MOHM, J, 1/10W	1	
R909-11	ERJ6GEYJ106	M 10MOHM,J,1/10W	3	
	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
IKJIZ		, - , -,		
R912	EB.T6CEV.T100	M 1КОНМ .T 1/10M	2	
R913,14 R915	ERJ6GEYJ102 ERJ6GEYJ103	M 1KOHM,J,1/10W M 10KOHM,J,1/10W	2	

2.5	T 50 1 37	Doub Maria 6	T =	
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R916	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R917	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R918	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R920	ERJ6GEYJ103	M 100KOHM, J, 1/10W	1	
R920 R921	ERJ6RBD3092	M30.9KOHM,F,1/10W	1	
	l		1	
R922	ERJ6GEYJ101	M 100 OHM, J, 1/10W	<del>                                     </del>	
R925	ERJ6GEYJ335	M 3.3MOHM, J, 1/10W	1	
R926,27	ERG2DJW224E	M 220KOHM, J, 2W	2	
R928-31	ERJ8ENF1203	M 12KOHM, 1/8W	4	
R932	ERJ6GEYJ105	M 1MOHM, J, 1/10W	1	
RL402	TSEH8011	RELAY	1	Δ
RL403	TSE10801	RELAY	1	$\Delta$
10103	10210001		<u> </u>	
S401,02	J0LT00000009	SWITCH	2	Δ
5401,02	2221000000	0.11011	<del></del>	<del></del>
T401	G4D4A0000107	SWITCHING	1	
1401	C-ID-IACOUOTO/	TRANSFORMER	*	
T402	G4D1A0000098	SWITCHING	1	Δ
		TRANSFORMER		
T404	G4D4A0000109	SWITCHING	1	Δ
		TRANSFORMER		
<b>T407</b>	ETQ11K5AZ	CHOKE TRANS	1	$\triangle$
<b>T410</b>	G4D2A0000229	SWITCHING	1	$\triangle$
		TRANSFORMER	ļ .	
<b>T601</b>	G4D2A0000227	SWITCHING	1	
		TRANSFORMER	<u> </u>	
W2	EDDC2mT201	C 200 OUM T 1/4W	1	
WZ	ERDS2TJ391	C 390 OHM, J,1/4W	-	
**5.01	#*************************************	anam	<del>                                     </del>	
X501	H2B400400021	CRYSTAL	1	
			<del>  _</del>	
Z1,Z2	K4ZZ01000206	TERMINAL	2	
Z410	TMM7464-2	CLAMPER	1	
Z411	TMME190	CLAMPER	1	
Z412	TMM7443-3	CLAMPER	1	
Z413	TMM7464-2	CLAMPER	1	
Z414	TMME190	CLAMPER	1	
Z420	TMM23417	CLAMPER	1	
Z450-53	EYF52BCY	FUSE HOLDER	4	
			<u> </u>	<u> </u>
ZN401,0 2	D4EAD6210001	VARISTOR	2	$\triangle$
ZN403	D4EA8511A001	VARISTOR	1	⚠
ZN404	D4EAB681A011	VARISTOR	1	$\triangle$